

## Internship: BA 2

### **Downtime and Efficiency Analysis of Automated V Cone Blender System**

#### **Abstract**

This business analytics project investigates the operational downtimes and efficiency bottlenecks of an industrial V Cone Blender system. By systematically collecting and analyzing downtime data, the study identifies high-frequency failure components, quantifies downtime costs, and reveals the root causes responsible for the majority of production losses. Using Pareto charts and summary dashboards built in Excel, actionable recommendations for preventive maintenance are formulated. The implementation of these analytics-driven strategies directly supports improvements in plant productivity, cost control, and data-driven decision-making.

#### **Introduction**

Modern industrial manufacturing relies extensively on automation to achieve high throughput and minimal downtime. Despite these advances, unplanned stoppages and suboptimal maintenance strategies can still disrupt operations and drive up costs. During my internship, I applied business analytics methodologies to the automated V Cone Blender system, an essential piece of mixing equipment, to gain transparency into failure modes, downtime patterns, and cost drivers. This project demonstrates how data analytics can bridge the gap between engineering operations and strategic management, supporting sustainable process improvements and operational excellence.

#### **Methodology**

##### **Data Collection**

**Downtime Events:** All stops of the V Cone Blender were recorded, noting the responsible component (Motor, Actuator, Sensor, Conveyor), duration, and type (Preventive or Unplanned).

**Cost Estimation:** Each downtime minute was assigned a productivity loss of ₹500.

Data Analysis

Aggregation: Downtime events were grouped by component to calculate event frequency, total lost minutes, and cost impact.

Visualization: Pareto charts were built to identify which components contributed most to total stoppage, highlighting the 80/20 rule for prioritization.

Dashboarding: Excel was used to build both detailed downtime logs and executive-friendly summaries.

Key Metrics Analyzed

1. Experimental Data Table

Metric	Description
Downtime Frequency	Number of stops per component
Duration per Downtime	Total minutes lost by failure mode
Maintenance Type	Categorized as Preventive or Unplanned
Downtime Cost Estimation	Downtime cost = ₹500 × duration
Pareto Analysis	Identified top causes driving most downtime

Results


Downtime Event Table (Sample)

Event	Component	Duration (min)	Maintenance Type	Downtime Cost (₹)
1	Actuator	3	Unplanned	1,500
2	Conveyor	7	Unplanned	3,500
3	Sensor	5	Unplanned	2,500
4	Actuator	9	Unplanned	4,500
5	Motor	7	Unplanned	3,500

### Aggregated Downtime by Component

Component	Frequency	Total Duration (min)	Total Cost (₹)
Motor	12	62	31,000
Actuator	11	41	20,500
Sensor	5	33	16,500
Conveyor	2	9	4,500

### Pareto Chart: Downtime Duration by Component

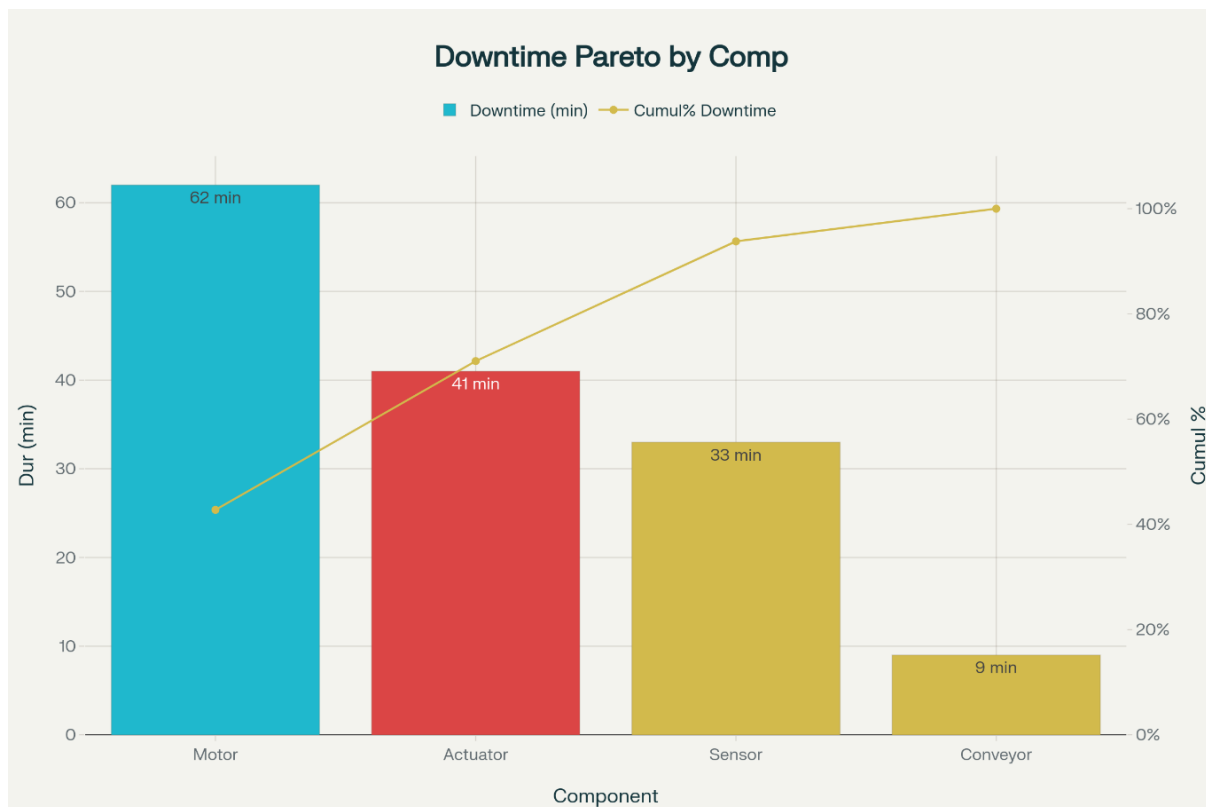

### Interpretation:

The Motor and Actuator together contributed to more than 60% of total downtime, with these plus the Sensor pushing cumulative contribution above 80%.

### Values Achieved

- **Transparency:** Provided clear, component-level insights into downtime patterns and their business impact.
- **Cost Awareness:** Quantified the financial loss from unplanned downtimes, aiding management in budget allocation for maintenance and upgrades.

- Actionable Prioritization: Pareto analysis made it clear where preventive action would have the greatest effect, enabling laser-focused, high-ROI investments.
- Improved Maintenance Strategies: Demonstrated the need to shift resource focus to Motor and Actuator systems, which together represented the lion's share of avoidable losses.

Enhanced Decision Support: Delivered dashboards and visual analytics that translated operational data into strategic recommendations for top management.

## **Conclusions**

Analyzing and visualizing downtime data for the V Cone Blender system provided significant operational and financial insights. The data-driven approach pinpointed that the Motor and Actuator subsystems were the leading contributors to productivity loss and maintenance costs. Targeted interventions, such as prioritized preventive maintenance, root cause investigations, and better stock management for critical spares, have the potential to eliminate the majority of avoidable downtime.

This project exemplifies the power of business analytics to translate engineering data into actionable business value. By marrying technical monitoring with root cause analytics and cost modeling, the plant can move from reactive firefighting towards proactive, continuous improvement, delivering measurable gains in operational efficiency and profitability.

# Appendix

## 1. Data Simulation and Preparation

```
import pandas as pd
import numpy as np

# Simulated downtime event data for root cause analysis
np.random.seed(42)
components = ['Motor', 'Actuator', 'Sensor', 'Conveyor']
events = 30

# Randomly generate component stops with probabilities
component_stops = np.random.choice(components, events, p=[0.3, 0.4, 0.2, 0.1])

# Duration of each downtime event in minutes
durations = np.random.randint(1, 10, size=events)

# Maintenance type (Preventive or Unplanned)
maintenance_type = np.random.choice(['Preventive', 'Unplanned'], events, p=[0.3, 0.7])

# Lost productivity cost per minute assumed (₹500/min as example)
cost_per_minute = 500

# Build DataFrame
df_downtime = pd.DataFrame({
    'Component': component_stops,
    'Duration_min': durations,
    'Maintenance_Type': maintenance_type
})

# Calculate downtime cost
df_downtime['Downtime_Cost'] = df_downtime['Duration_min'] * cost_per_minute

# Aggregate metrics by component
agg_by_component = df_downtime.groupby('Component').agg(
    Frequency=('Component', 'count'),
    Total_Duration_min=('Duration_min', 'sum'),
    Total_Cost=('Downtime_Cost', 'sum')
).sort_values(by='Total_Duration_min', ascending=False)

print(df_downtime.head())
print(agg_by_component)
```

## 2. Generating Pareto Chart Data for Visualization

```
# Example aggregated data for Pareto chart
pareto_data = agg_by_component.reset_index()[['Component', 'Total_Duration_min']]

# Calculate cumulative percentage
pareto_data['Cumulative_Sum'] = pareto_data['Total_Duration_min'].cumsum()
pareto_data['Cumulative_Percentage'] = 100 * pareto_data['Cumulative_Sum'] /
pareto_data['Total_Duration_min'].sum()

print(pareto_data)
```

## 3. Preparing Downtime Duration and Cost Data for Charts

```
# Data prepared for bar charts comparing downtime and costs
bar_chart_data = agg_by_component.reset_index()[['Component',
'Total_Duration_min', 'Total_Cost']]

print(bar_chart_data)
```