


## Experiment 2

Shravanth J

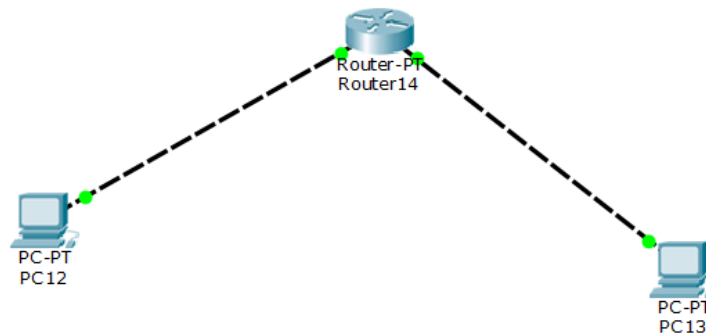

Router9

Physical Config CLI

### IOS Command Line Interface

```
Router>config terminal
^
% Invalid input detected at '^' marker.

Router>enable
Router#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface fastEthernet 0/0
Router(config-if)#ip address 10.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up

Router(config-if)#exit
Router(config)#interface fastEthernet 1/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to
up

Router(config-if)#exit
Router(config)#
```

Copy Paste

