

GP SERIES

6 ~ 10KVA

1:1 Phase PF: 0.8



ON LINE
OUTPUT: 231 V

► CONTROL PANEL



Features

High reliability design

- Double Conversion on-line design, which make the output a pure sine wave source with tracking frequency, phase-lock-and voltage regulation, low distortion and without power fluctuation interference, providing the load with more comprehensive protection..

Strong protection for load

- Built-in isolation transformer, strong anti-interference ability, provides more comprehensive protection.
- Built-in static electronic bypass switch, when UPS fails, it can transfer to bypass mode and continue to provide power for load by AC.

Wide input range

- Wide input voltage range up to 165~275VAC, avoid frequently switching to battery mode, which adapt to the areas with harsh environment.
- Wide input frequency range, ensure all types of fuel generators connected work stable.

Optimization of high-performance battery

- Advanced floating switching and charging technology maximums the activation of the battery, thus saves the charging time and extends the battery life.

Battery cold start function

- The UPS can be start directly by battery group when no utility access in, which meets the emergent needs of user.
- Strong cold start ability, which can do the cold start operation when full load.


User-friendly network management

- Communication with computer can be realized by RS232 with corresponding monitoring software. The various parameters can be shown on the communication interface. External SNMP adapter. The UPS with remote network management capability can provide real-time data for communication and management through a variety of network management systems.

Comprehensive and reliable protection

- Self-diagnosis function before start-up, avoid the risks that the failure may lead to.
- The multi-protection such as overload, short-circuit, over-temperature, battery under voltage, battery over-charge and so on greatly ensure the system stability and reliability.

► REAR PANEL

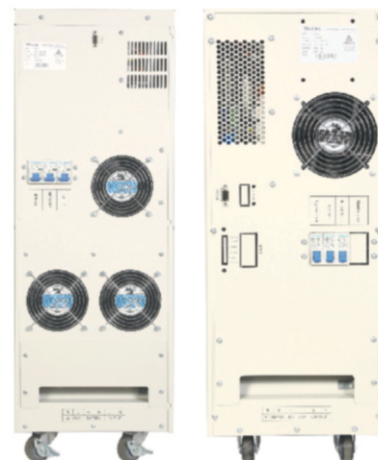

Technical Specifications:



MODEL	UPS GP06		UPS GP10	
Capacity (KVA/KW)	6 / 4.8		10 / 8	
INPUT				
Nominal voltage	220/230Vac			
Operating voltage range	165~275Vac			
Operating frequency range	50/60Hz (±5%)			
Power factor	>0.97 (with filter)			
OUTPUT				
Output voltage	220Vac(±0.5%)/230Vac (±0.5%)			
Output frequency	50/60Hz(±0.5%)			
Crest factor	3:1 (max)			
Efficiency	> 92% online			
Harmonic distortion (THD)	<1.5% (Linear Load)			
Power Factor	0.8 (0.9 Optional)			
BATTERY				
Battery Voltage	192 VDC			
Battery Types	SMF VRLA/TUBULAR			
SYSTEM FEATURES				
Transfer Time	0 ms (Line mode ↔ Battery mode)			
Overload	>125% : 1min, <150% : 200ms			
Communication interface	RS, SNMP (optional), Dry contact (optional)			
ENVIRONMENTAL				
Operating temperature	0~40°C			
Storage temperature	-25°C-55°C			
Humidity range	0~95% (non-condensing)			
Altitude	<1500m			
Noise level	<55dB			
PHYSICAL				
Dimension W x D x H (mm)	230 x 580 x 720		305 x 585 x 864	
Net weight (kg)	63		82	
STANDARDS				
Safety	IEC/EN62040-1;ENC/EN62400-1			
EMC	IEC/EN62040-2;IEC61000-4-2;IEC61000-4-3;IEC61000-4-4; IEC61000-4-5;IEC61000-4-6;IEC61000-4-8			

Web. : www.vp-ups.com

Address : Chopde Audyogik Sankul, Ramtekadi Industrial Area,
Near ION Exam Centre, Plot No. 4/8+9+40,
Ramtekdi, Hadapsar, Pune 411028.