

MASTER SERIES

10 ~ 30KVA

3:1 Phase PF: 0.8



► CONTROL PANEL



Features

High reliability design

- Double Conversion on-line design, which makes the output a pure sine wave source with tracking frequency, phase-lock - and voltage regulation, low distortion and without power fluctuation interference, providing the load with more comprehensive protection.

Strong protection for load

- Built-in isolation transformer, strong anti-interference ability, provides more comprehensive protection.

Wide input range

- Wide input voltage range up to "304~456VAC, avoid frequently switching to battery mode, which adapt to the areas with harsh environment.
- Wide input frequency range, ensure all types of fuel generators connected work stable.

Optimization of high-performance battery

- Adapt intelligent battery management(ABM) technology, thus extending battery life and reducing battery maintenance times.
- Advanced floating switching and charging technology maximize the activation of the battery, thus saves the charging time and extends the battery life.

Battery cold start function

- The UPS can be start directly by battery group when no utility access in, which meets the emergent needs of user.
- Strong cold start ability, which can do the cold start operation when full load.

User-friendly network management


- Communication with computer can be realized by RS232 with corresponding monitoring software. The various parameters can be shown on the communication interface.
- External SNMP adapter. The UPS with remote network management capability can provide real-time data for communication and management through a variety of network management systems.

• Comprehensive and reliable protection

- Self-diagnosis function before start-up, avoid the risks that the failure may lead to.
- The multi-protection such as overload, short-circuit, over-temperature, battery under voltage, battery over-charge and so on greatly ensure the system stability and reliability.

► REAR PANEL

- RS232 port
- Input breaker
- FAN
- Connection Box
- Entrance Hole
- Active wheel

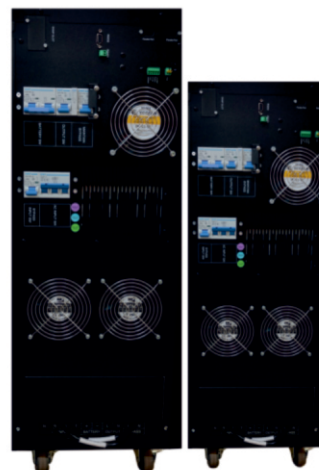

Technical Specifications:

MODEL	UPS M 10		UPS M 15		UPS M 20		UPS M 30	
Capacity (KVA / KW)	10 / 8		15 / 12		20 / 16		30 / 24	
INPUT								
Operating voltage range	380Vac(±20%), (3Ph+N+PE)							
Operating frequency range	50/60Hz (±5%)							
Power factor	>0.97 (with filter - optional)							
Max. input current(A)	23		34		45		68	
OUTPUT								
Output voltage	220Vac(±0.5%)/230Vac (±0.5%)							
Output frequency	50/60Hz(±0.5%)							
Crest factor	3:1 (max)							
Efficiency	> 92% online							
Harmonic distortion (THD)	<1.5% (Linear Load)							
Power Factor	0.8 (0.9 Optional)							
BATTERY								
Battery Voltage	192 VDC				240 VDC			
Battery Types	SMF / VRLA / TUBULAR							
SYSTEM FEATURES								
Transfer Time	0 ms (Line mode → Battery mode)							
Overload	>125%: 1min, >150%; 200ms							
LED display	Battery low, Mains status, Inverter, Bypass, UPS failure, Overload							
LCD display	I / O voltage, frequency, Battery voltage, Load percentage, Internal temperature							
Communication interface	RS232, SNMP (optional), Dry contact (optional)							
ENVIRONMENTAL								
Operating temperature	0 ~ 40°C							
Storage temperature	-25°C ~ 55°C							
Humidity range	0 ~ 95% (non-condensing)							
Altitude	<1500m							
Noise level	<55dB							
PHYSICAL								
Dimension W x D x H (mm)	305 x 585 x 864		409 x 798 x 1044				430 X 830 X 1100	
Net weight (kg)	120		145		160		255	
STANDARDS								
Safety	IEC/EN62040-1;IEC/EN62477-1							
EMC	IEC/EN62040-2;IEC61000-4-2;IEC61000-4-3;IEC61000-4-4; IEC61000-4-5;IEC61000-4-6;IEC61000-4-8							

Specifications are subject to change without prior notice.