Experiment -9

Design a simple Topology and Configure One Router, Two Switches, and PCs Using Ciso Packet Tracer

Aim:

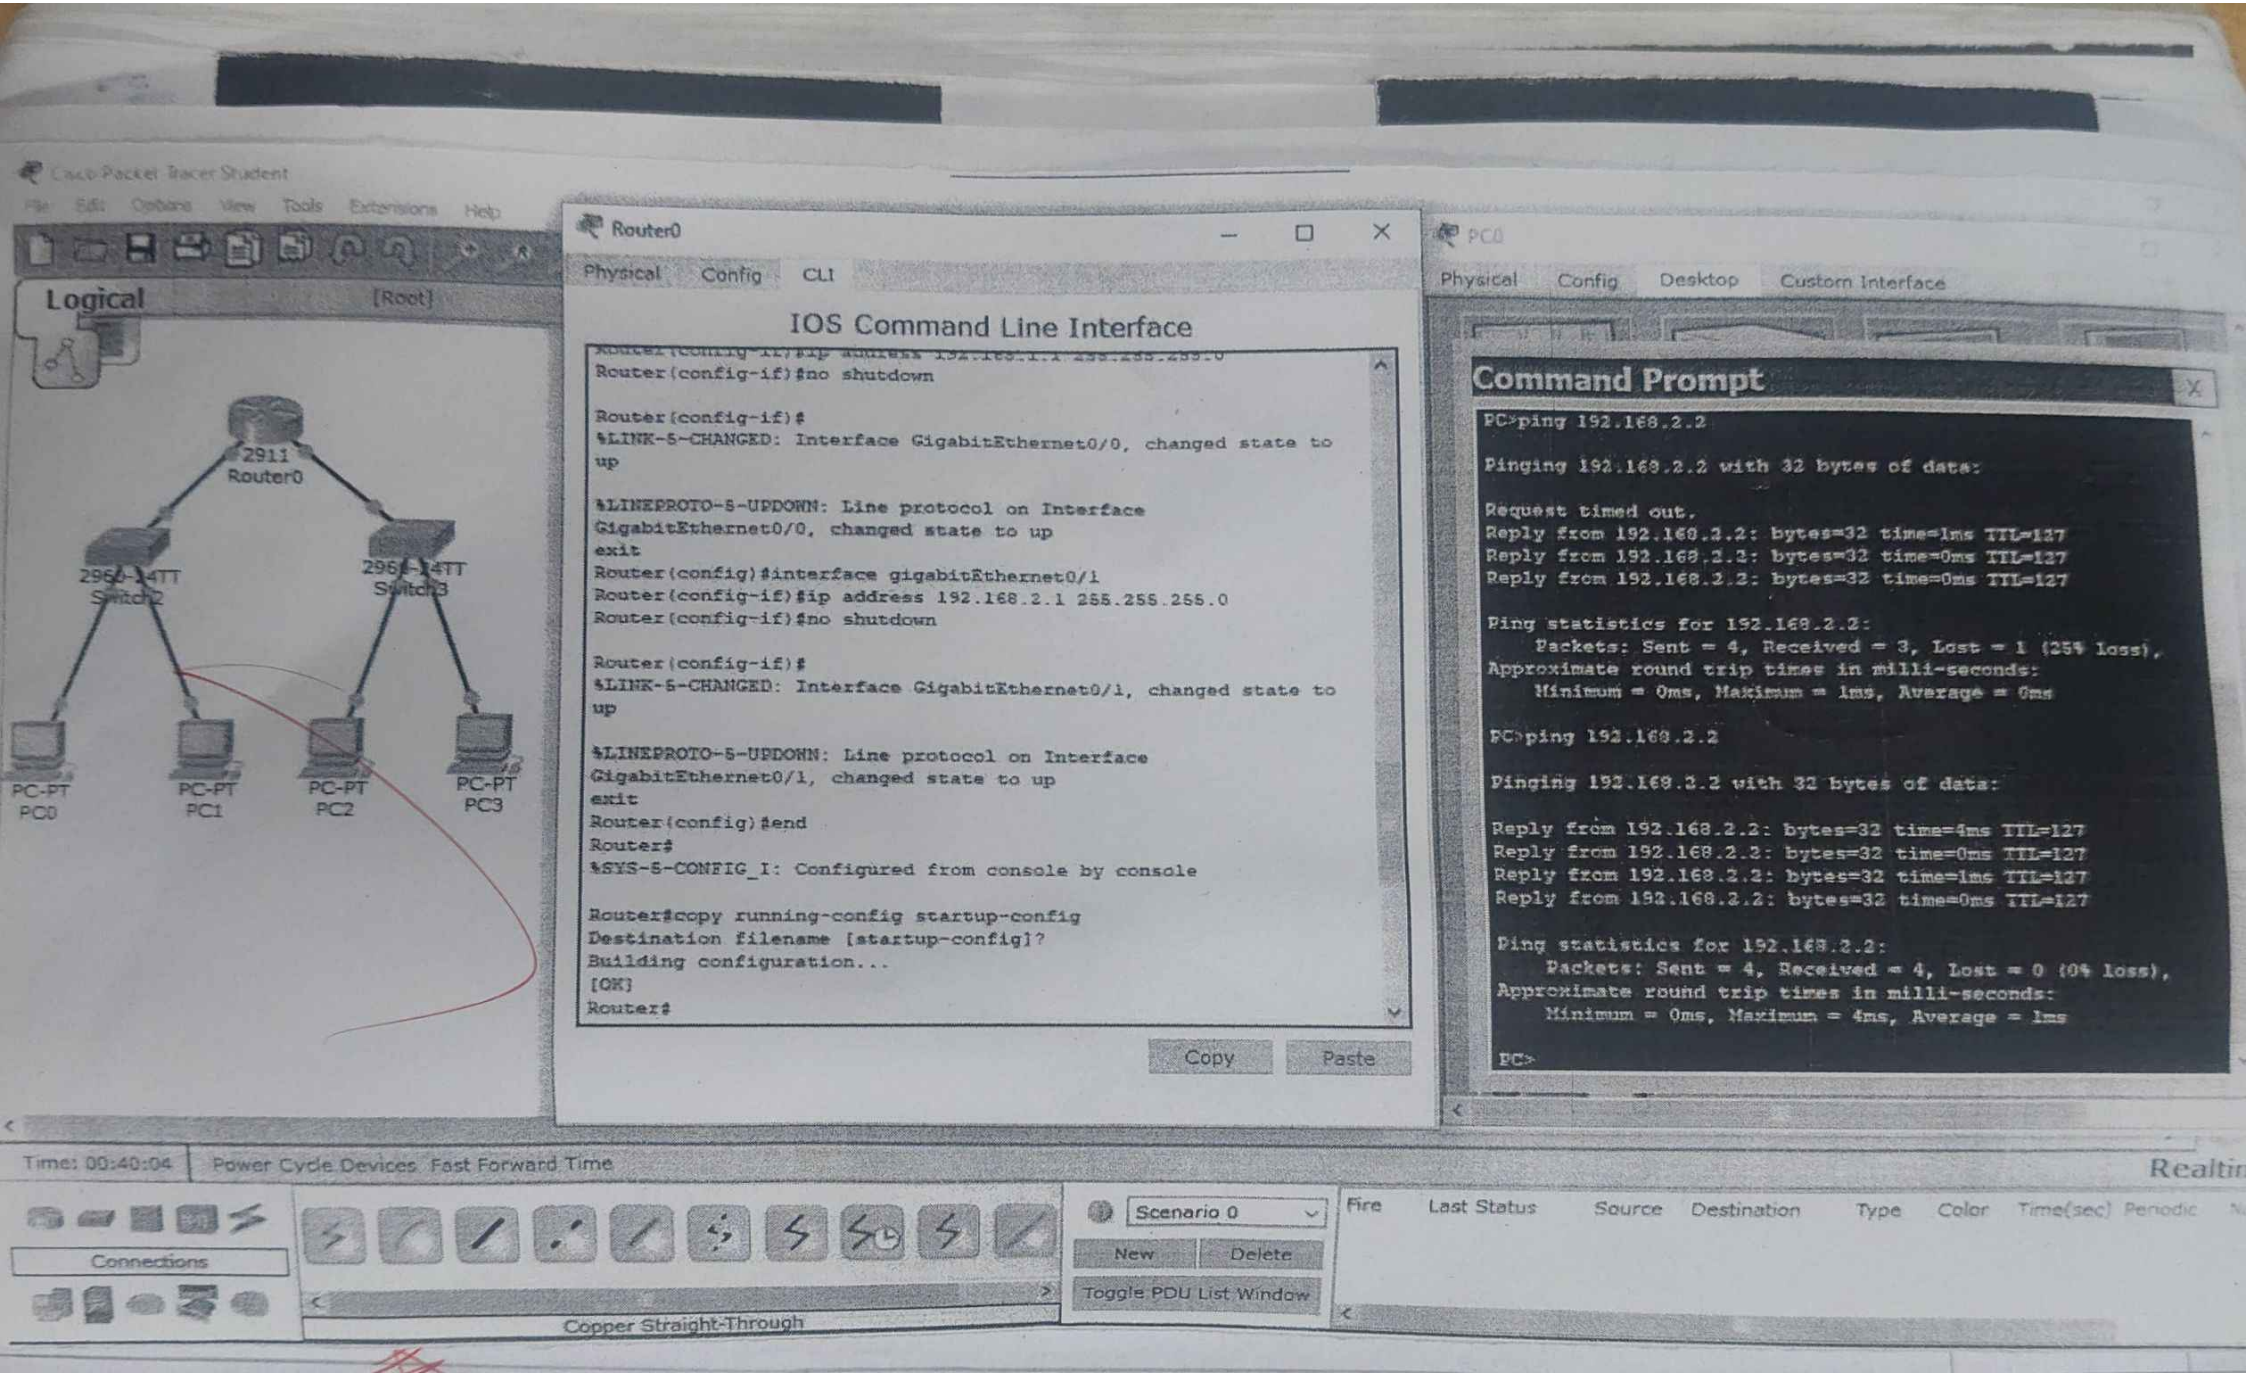
To design and configure a simple network topology consisting of one router, 2 switches & 4 PCs & Cisco Packet Tracer & verify communication between all devices

Procedure:

* Step 1: Open Cisco Packet Tracer & Add Devices
* Step 2: Connect the Devices & Open Router CLI
* Step 3: Configure Interface G0/0, PC0, PC1, PC2 & PC3
* Step 4: Test Connectivity

Result:

Thus, The design to configure a simple network topology executed successfully


Cisco Packet Tracer Student
File Edit Options View Tools Extensions Help
Logical
[Root]
2911
Router0
2960-24TT
Switch2
2960-24TT
Switch3
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
Router0
Physical
Config
CLI
IOS Command Line Interface
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
exit
Router(config)#interface gigabitEthernet0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
exit
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#
Copy
Paste
PC0
Physical
Config
Desktop
Custom Interface
Command Prompt
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Reply from 192.168.2.2: bytes=32 time=4ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 1ms
PC>
Time: 00:40:04
Power Cycle Devices
Fast Forward Time
Connections
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic