Experiment-3

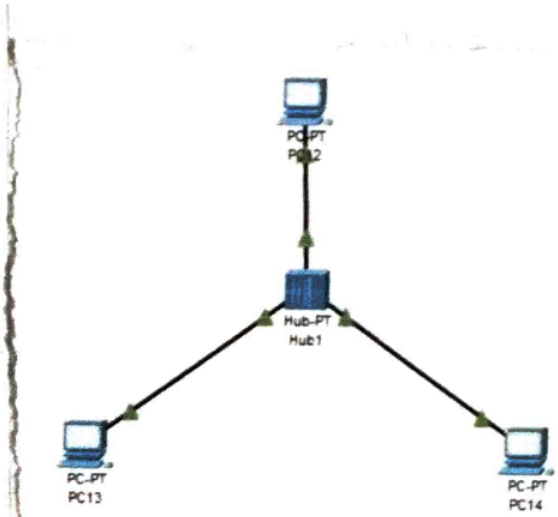
CISCO Packet Tracer

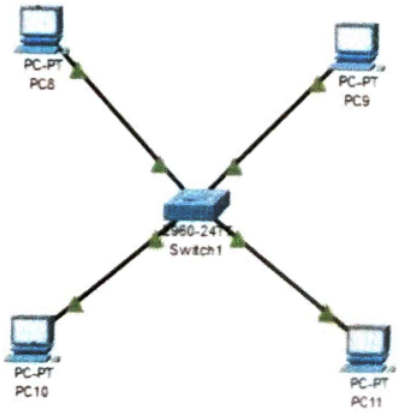
AIM:

To Study the Cisco Packet Tracer environment and analyze the behaviour of network devices such as Hub and Switch.

PROCEDURE:

1. Open Cisco Packet Tracer
2. Study the Packet Tracer Interface:
   - → Menu bar
   - → Main Toolbar
   - → Logical/Physical workspace
   - → Common Tools
   - → Simulation/Realtime modes
   - → Network component box.
3. Create a Network using 4PCs and a Hub.
4. Connect the PCs to the Hub using copper straight-through cables.
5. Assign IP addresses to the PCs.
6. Create another network using 4PCs and a Switch.
7. Connect the PCs to the Switch.
8. Assign IP addresses.
9. Use the PDU Tool to send a packet from one PC to another.
10. Observe Packet forwarding in both Hub and


PC-PT
PC12
Hub-PT
Hub1
PC-PT
PC13
PC-PT
PC14


PC-PT
PC8
PC-PT
PC9
Switch1
PC-PT
PC10
PC-PT
PC11

Switch networks.
11. Compare their behaviour.

The manual specifically instructs creating 4-PC Hub and Switch networks and observing PDU forwarding behaviour.

Sample Output:

Hub network:

PC0 → Hub → PC1
PC0 → Hub → PC2
PC0 → Hub → PC3

Switch Network:

PC0 → Switch → PC1

8/10

Result:

Thus, a simple network was successfully designed in Cisco Packet Tracer and the forwarding behaviours of Hub & Switch was analyzed.