



Name: VISPUTE SHREYA GANESH

Reg no.: 24BCE0563

1.

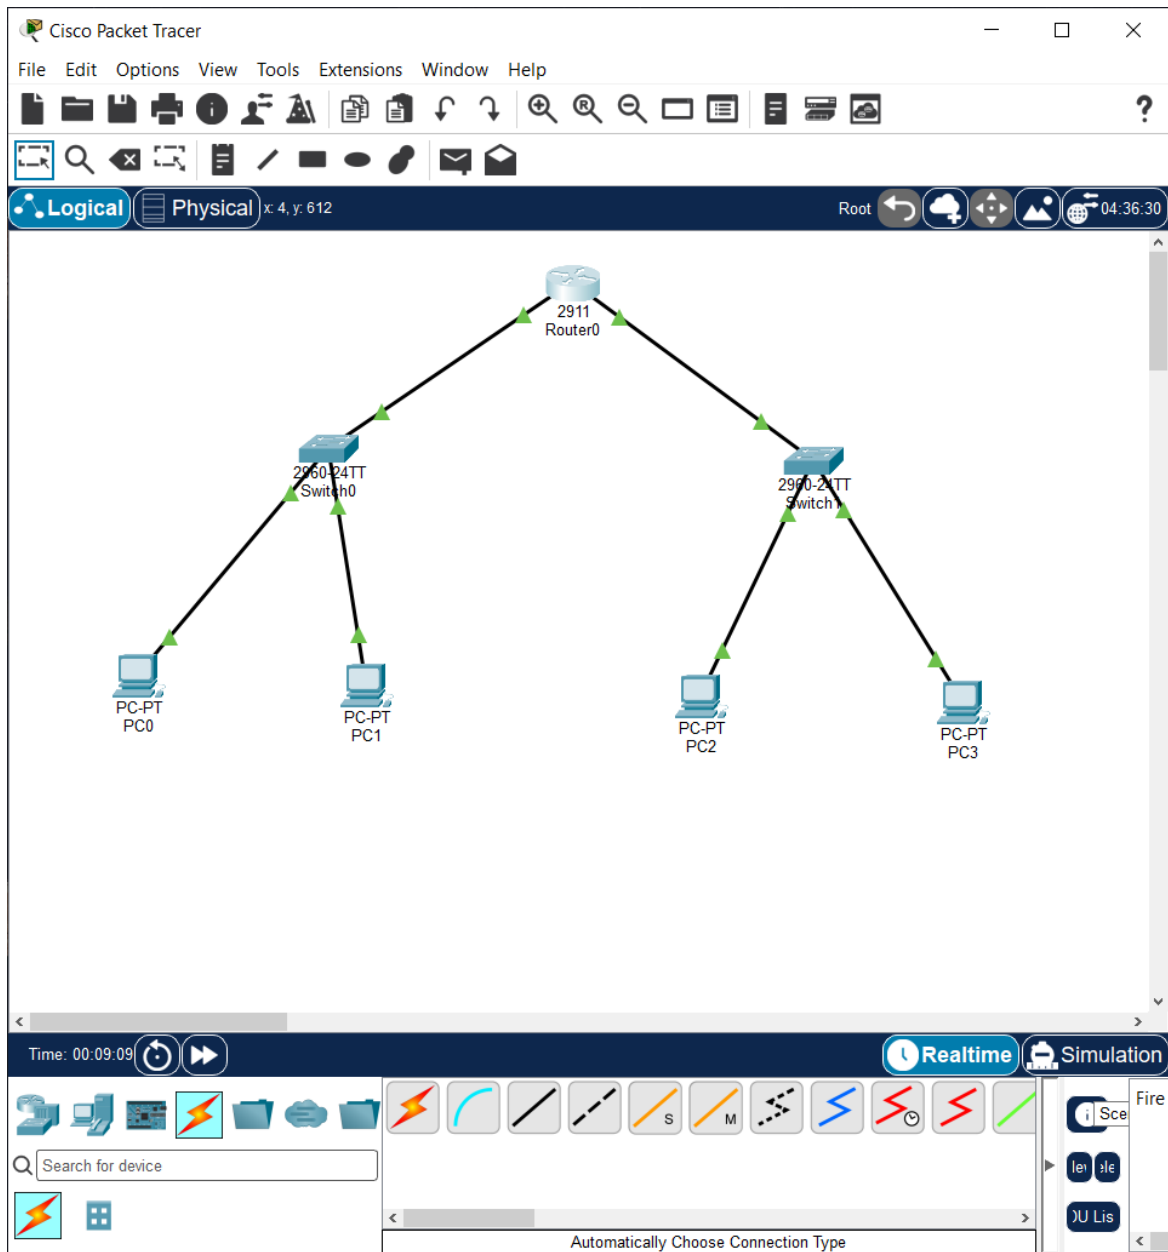

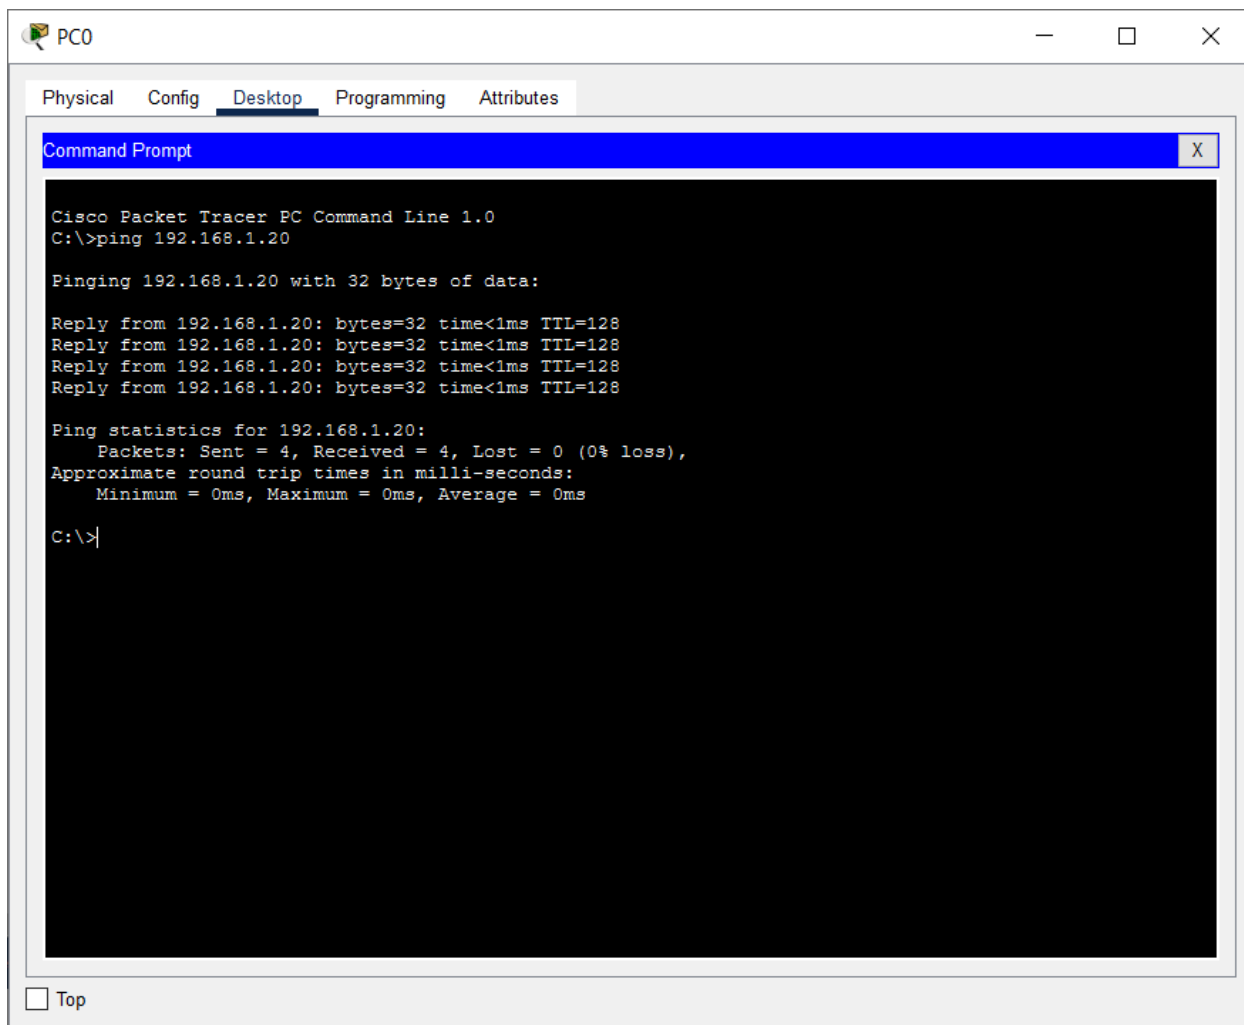

Command Prompt



```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.20

Pinging 192.168.1.20 with 32 bytes of data:

Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time=7ms TTL=127

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>|
```

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time=7ms TTL=127

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>tracert 192.168.2.10

Tracing route to 192.168.2.10 over a maximum of 30 hops:

  1  0 ms    0 ms    0 ms    192.168.1.1
  2  0 ms    0 ms    0 ms    192.168.2.10

Trace complete.

C:\>|
```

☐ Top

Command Prompt

```
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time=7ms TTL=127

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>tracert 192.168.2.10

Tracing route to 192.168.2.10 over a maximum of 30 hops:

  1  0 ms    0 ms    0 ms    192.168.1.1
  2  0 ms    0 ms    0 ms    192.168.2.10

Trace complete.


C:\>ping 192.168.1.20

Pinging 192.168.1.20 with 32 bytes of data:

Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

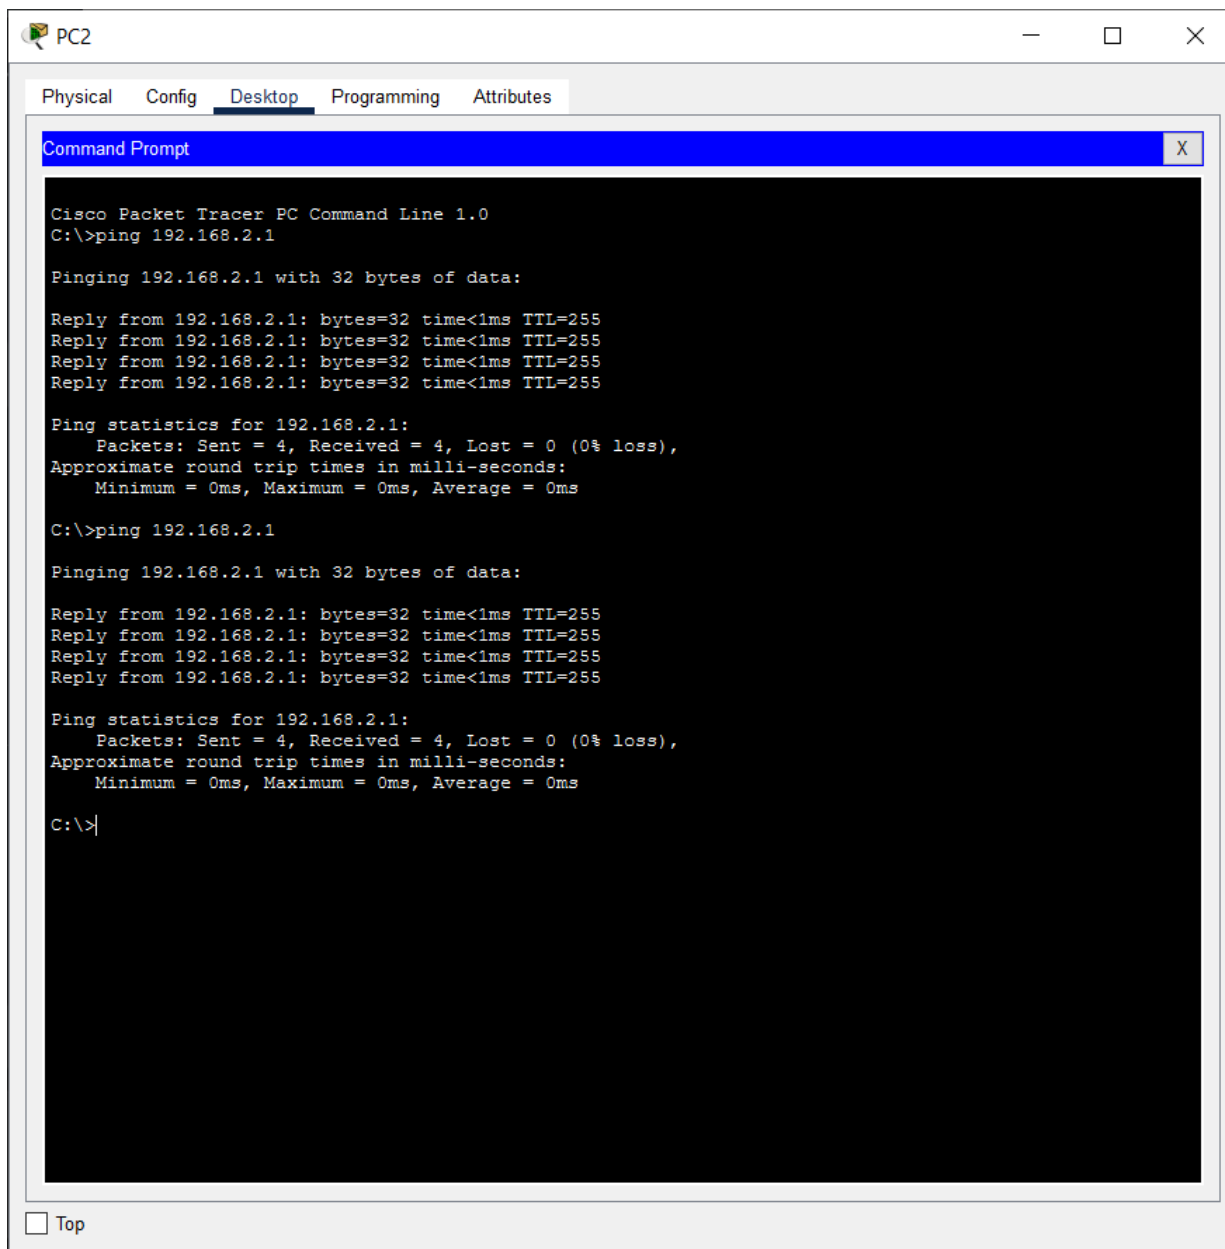

Command Prompt

```
Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time=7ms TTL=127

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>tracert 192.168.2.10

Tracing route to 192.168.2.10 over a maximum of 30 hops:

  1  0 ms    0 ms    0 ms    192.168.1.1
  2  0 ms    0 ms    0 ms    192.168.2.10

Trace complete.

C:\>ping 192.168.1.20

Pinging 192.168.1.20 with 32 bytes of data:

Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128
Reply from 192.168.1.20: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

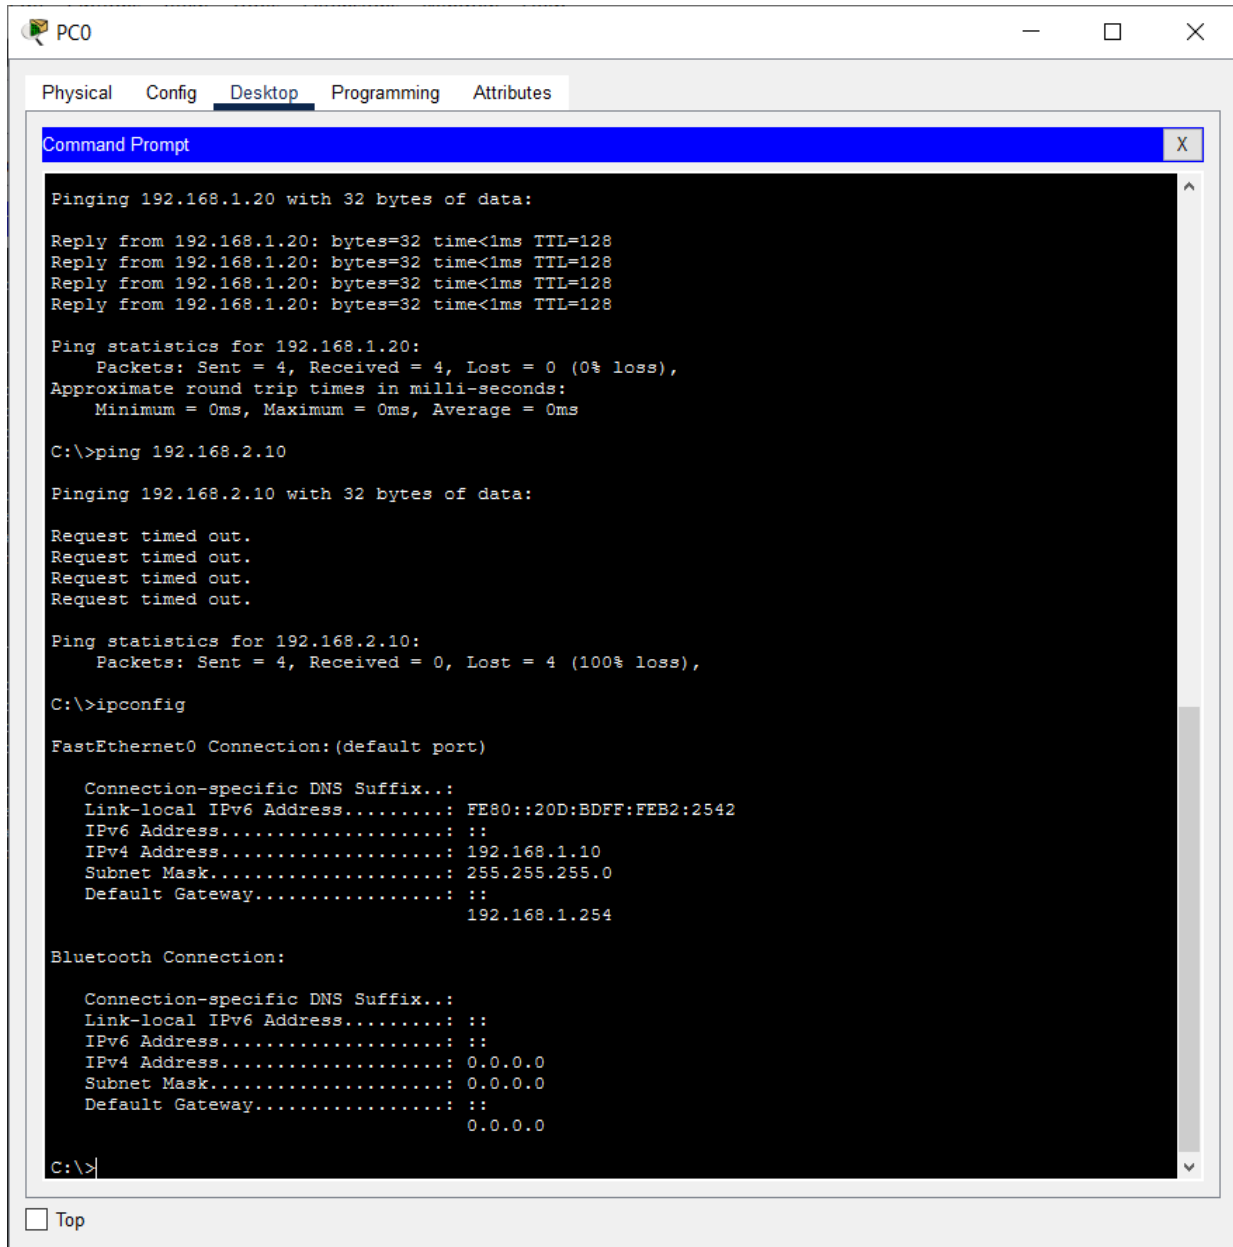

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 278, y: 400

Root 08:34:30

Simulation Panel

Event List

Vis.	Time(sec)	Last Device
	0.000	--
	0.000	--
	0.001	PC0
	0.002	Switch0
	0.002	Switch0
	0.306	--
	0.307	Switch1
	0.307	Switch1
	0.307	Switch1

Reset Simulation ☒ Constant Delay Captured to: 0.307 s

Play Controls

Event List Filters - Visible Events

ACL Filter, ARP, Bluetooth, CAPIWAP, CDP, DHCPv6, DTP, EAPOL, EIGRPv6, FTP, H.323, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IEC, IPsec, ISAKMP, IoT, IoT, TCP, LACP, LLDP, MODBUS, Meraki, NDP, NETFLOW, NTP, OSPFv6, PAgP, POP3, PPP, PPPoE, PTP, Profinet, RADIUS, REP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP

Edit Filters Show All/None

Time: 00:16:09.245 PLAY CONTROLS

Search for device

Automatically Choose Connection Type

Scenario 0

New Delete

Toggle PDU List Window

Fire Last Status Source D

In Progress PC0

