


Wedge Angle




Shallow wedge (below 10°)

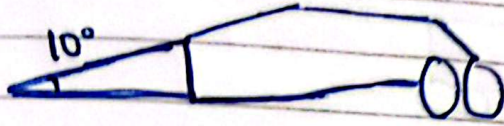

Cons

- + Longer wedge (less overall space for main chassis body)
- + If robot moves at higher speeds, front wedge will bob more / High chance of scraping the ring or stopping ~~seamless~~ proper robot movement


Steep wedge (above 10°)

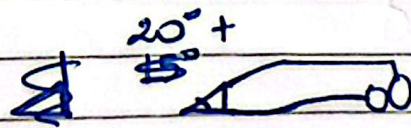

Cons

- + Higher the wedge angle more blunt force impact
- + Opponent's wedge can easily slide under if they have a lower wedge angle

Lifting Ramp

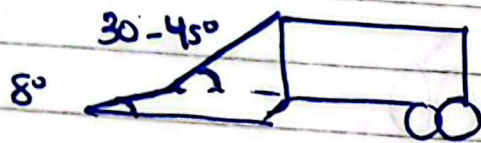

Purpose — Prevent riding over and on top of our own chassis

+ Once the opponent comes on top of the lifting ramp — all traction will be lost for them on the wheels

— Addition of the ramp would mean increase in overall height of the body depending on primary wedge angle

Overall sweet spot

Primary wedge $\rightarrow 10^\circ$

LR $\rightarrow 45^\circ$ (Can be variable depending on chassis body ideally 30-45° is enough)