wheelset-s2pinn: Phase 0 report (gate G0)

Generated from **results/** by experiments/make_g0_report.py. Gate file commit: 0d5e2ad64b6df6f1363df203677c6a90cb769b0f-dirty; generated 2026-10-11T17:16:34Z. Every number below is read from a results JSON written by an experiment script.

1. Gate summary

Item	Status	Key numbers
(a) S²-PINN reproduces stochastic diffusion within 2× of the paper's mean error (Nc=4096 vs Table 14)	PENDING	Nc=4096 CPU run in progress (experiments/p0_reproduce_s2pinn_resumable.py --colloc 4096)
(b) SDOF shows a clear Π² trend in the required gPC degree	FAIL AS STATED: trend clear, but Pi^2 holds only for Gaussian inputs; uniform inputs scale like Pi	Legendre: $p \propto \Pi^{0.91\pm0.01}$ (R^2=0.994); Hermite: overall $\Pi^{1.59}$, local slope → 1.93 at large Π
(c) Eq. (41) within 10% of measured effective damping, or measured relation reported	FAIL: Eq. 41 misses 10%; measured relation reported (gate fallback)	transient/sdof: median err 0.248; transient/2dof: median err 0.356; forced/sdof: median err 0.831; forced/2dof: median err 3.26
(d) Literature stop rule (method already published?)	NOT TRIGGERED	see docs/lit_review.md

2. (a) S²-PINN stochastic-diffusion reproduction

Pending. Nc=4096 CPU run in progress (experiments/p0_reproduce_s2pinn_resumable.py --colloc 4096)

CPU cost on this container (4 cores, no GPU): 4.09 s per step, i.e. 22.7 h for 20k steps. The 1 GB / 90 min cost limit refers to a T4 and cannot be checked on this hardware.


Runner checks: 20-step replay mean rel. L2 = 1.0082898 vs the released train() 1.0082900. Uninterrupted vs stopped-and-resumed 30-step runs: 0.9955707788 vs 0.9955707788.


3. (b) H1 on an SDOF oscillator

Receptance of x'' + c x' + k x = $e^{i\omega t}$ with random stiffness (CoV ∈ 2%, 5%, 10%, 20%) and deterministic damper (ζ ∈ 0.5%, 1%, 2%, 5%), plus a 12-point CoV supplement. Required degree = smallest p with relative variance error ≤ 1% (orthonormal projection by quadrature). Π = s/ζ with s the natural-frequency CoV.

Family (input law)	slope of log p vs log Π (p≥3)	R^2	n	local slope by Π bin	p/Π or p/Π² by bin
Legendre (uniform k)	0.905 ± 0.010	0.9939	56	[0.5,2): 0.93 [2,5): 1.02 [5,10): 0.94 [10,40): 0.95	p/Π [0.5,2): 4.69 [2,5): 4.16 [5,10): 4.06 [10,40): 3.98
Hermite (log-normal k)	1.592 ± 0.025	0.9859	59	[0.5,2): 1.41 [2,5): 1.77 [5,10): 1.87 [10,40): 1.93	p/Π² [0.5,2): 10.09 [2,5): 6.92 [5,10): 5.89 [10,40): 5.57

Collapse onto Π: pairs of primary-grid cases with Π within 2% but different ζ and CoV need 9/9, 21/21, 21/21, 41/41, 5/5, 11/11, 21/21, 3/3, 32/31, 157/156, 157/154, 575/567, 11/11, 46/46, 156/154, 5/5 (required degrees).

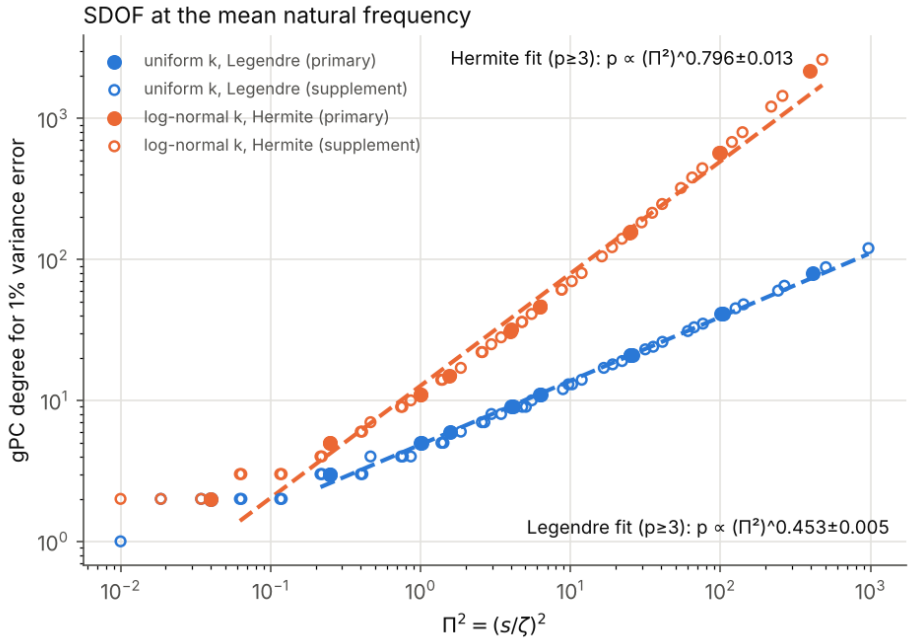

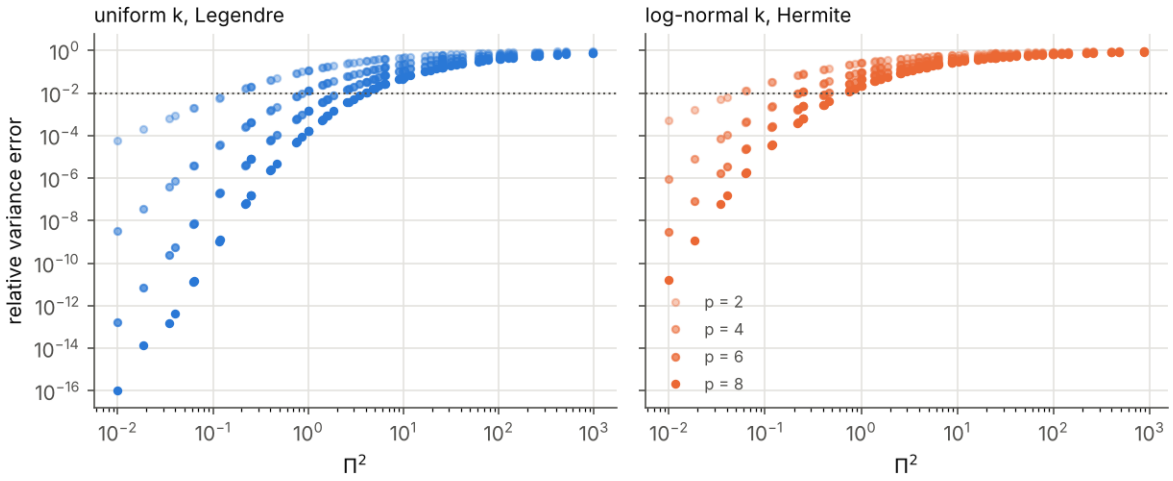

Reading. The trend is clear, but the exponent depends on the input law. For bounded (uniform/Legendre) inputs, which is how the paper treats θ and W, the required degree grows like Π, not Π². Π² appears only asymptotically for Gaussian (Hermite) inputs. This matches approximation theory (Bernstein ellipse vs strip of analyticity) and the root-spreading result of Jacquelin et al. (2016).

4. (c) Eq. (41): residual-induced damping bias

Derivation (docs/derivations/eq41.md): with a long-window residual loss, an enforced initial condition and a relative unresolved residual floor R, minimising over the decay rate gives $\lambda^{*2} = \lambda_0^2 + (R/2\omega)^2$ with $\lambda_0 = \zeta\omega$. This is Eq. (41) once ζ is read as a decay rate. The steady-state counterpart is ridge shrinkage $X^* = (A^H A + R^2 I)^{-1} A^H F$, a different law.

Setting	n	median $\lvert\Delta\rvert/\lambda$ (Eq. 41)	within 10%	median bias / λ_0	alt. prediction (median err)	measured $\lambda^2-\lambda_0^2 = c\,(R/2\omega)^\beta$
transient/sdof	60	0.248	32%	0.973	window: 0.347	c=4.07, β=2.40±0.08 (n=58)
transient/2dof	120	0.356	6%	4.84	window: 0.396	c=2.72, β=1.88±0.07 (n=120)
forced/sdof	15	0.831	13%	0.389	ridge: 0.627	c=0.36, β=1.05±0.14 (n=12)
forced/2dof	15	3.26	7%	6.25	ridge: 0.935	c=2.10, β=0.74±0.21 (n=10)


forced/sdof: point-wise ridge-law amplitude check on 66/135 non-collapsed points: median error 0.0398, 56% within 10%. Sweeps with no collapsed point: 6 (Eq. 41 median err 0.152, ridge 0.156).

forced/2dof: point-wise ridge-law amplitude check on 58/135 non-collapsed points: median error 0.697, 10% within 10%. Sweeps with no collapsed point: 5 (Eq. 41 median err 0.753, ridge 0.81).

Time-domain tanh-MLP PINN on forced SDOF at resonance (10 runs): amplitude ratio to exact 0.0021–0.0161, i.e. stuck at the trivial solution x = 0.

Exploratory breakdown (not pre-registered): transient runs binned by how well the PINN output is described by a single damped sinusoid, the shape Eq. (41)'s derivation assumes.

Setting	fit error bin	n	median $\lvert\Delta\rvert/\lambda$ (Eq. 41)	within 10%	median bias / λ_0	measured / predicted excess	c with β = 2
transient/sdof	[0.0,0.02)	21	6.248e-03	76%	6.752e-03	1.27	1.42
transient/sdof	[0.02,0.05)	10	0.151	30%	0.426	1.43	1.78
transient/sdof	[0.05,0.1)	9	0.329	0%	2.29	3.05	4.07
transient/sdof	[0.1,10.0)	20	0.412	0%	4.02	2.17	3.49
transient/2dof	[0.0,0.02)	2	0.0981	50%	1.13	1.04	–
transient/2dof	[0.02,0.05)	11	0.242	9%	1.37	1.58	1.9
transient/2dof	[0.05,0.1)	10	0.345	0%	4.1	1.86	2.58
transient/2dof	[0.1,10.0)	97	0.377	5%	5.7	1.82	2.85

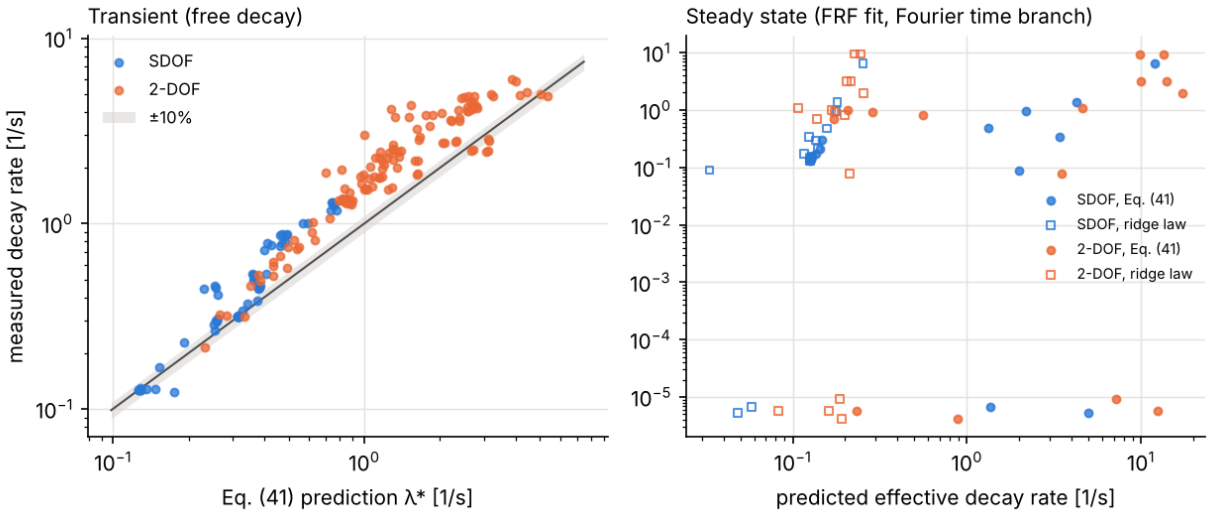

Verdict. FAIL: Eq. 41 misses 10%; measured relation reported (gate fallback). Eq. (41) holds only where the bias is negligible (well-trained transient runs); wherever the bias matters, the measured excess decay rate is larger than Eq. (41) predicts from the measured residual floor, with roughly the same quadratic dependence on R but a coefficient above 1. In steady state neither Eq. (41) nor the ridge law predicts the FRF-fitted damping to 10%. Following the brief, no damping correction will be built on Eq. (41); later phases use the measured relation and direct measurement of the surrogate's effective damping.

5. (d) Literature check

No published stochastic or separable PINN identifying bearing or support parameters in rotating machinery or a railway wheelset was found (web search only; Crossref and publisher sites are blocked here). Closest: a deterministic PINN for a Jeffcott rotor (Parziale et al., Sensors 24:207, 2024) and gPC-Bayesian magnetic-bearing identification. The near-resonance PCE difficulty itself is established (Jacquelin et al., JSV 2015 and J. Eng. Mech. 2015/2016; Yaghoubi et al., PEM 2017; Kara and Ferguson, JSV 2023), so H1 is framed as a quantified diagnostic. Two full texts (J. Eng. Mech. 2016; PEM 2026) need checking with library access before the scaling law is claimed as new. Full table: docs/lit_review.md.

6. Provenance

Result file	git commit	wall time	timestamp (UTC)
results/p0/s2pinn_cpu_timing.json	unknown	–	2026-10-11T13:21:12Z
results/p0/h1_sdof.json	unknown	0.19 h	2026-10-11T13:38:01Z
results/p0/h1_sdof_summary.json	unknown	–	2026-10-11T13:48:37Z
results/p0/eq41.json	a3ac030753f8…dirty	1.42 h	2026-10-11T15:13:35Z
results/gates/G0.json	0d5e2ad64b6d…dirty	–	2026-10-11T17:16:34Z