



PHOS Class N Autoclave

Navee Series – 16 & 23 Ltr.

Advanced Sterilization Technology for
Modern Clinics



FEATURES ▼

Chamber & Materials



Chamber SS316
Medical Grade



Aluminum Instrument Tray



Adopted European
Class N Standards



2 Purge Cycle

Safety Standards



Over Heat Control



Over Pressure Control



Safety Door Locking System



Calibrated Safety Valve

Advanced System



ARM Based Advanced
Microcontroller System



Compliant to Sterilization
Standards



Faster & Better Sterilization



Dual Safety System for Door



Cycle Counter



User Friendly Display

Advanced Sterilization

Smart Control. Maximum Safety.



DISPLAY & CONTROL PANEL

Display shows: Sterilization Mode
Time ▪ Dry Time ▪ Vacuum Time ▪
Temperature ▪ Pressure ▪ Cycle Count


Select ▪ Start / Stop ▪ Settings



SECURE DOOR & HIGH-PERFORMANCE CHAMBER

Maximum Safety & Efficiency

The Navee Series is engineered with a heavy-duty sterilization chamber and a dual-lock safety door to ensure high-pressure performance with absolute reliability.

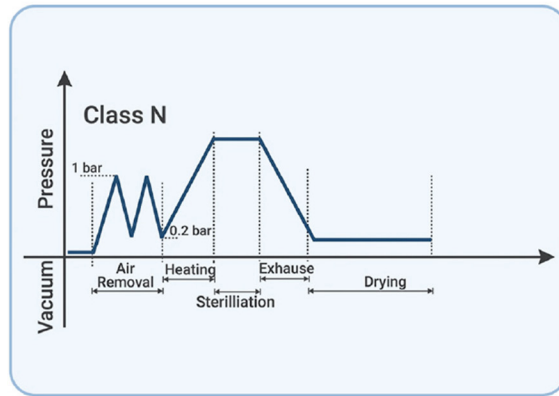

PRE PROGRAMMED STERILIZATION TABLE

PROGRAMME MODE	DESCRIPTION LOAD	STERILIZATION TIME	DRY TIME	TOTAL TIME
121 FAST	Unwrapped instruments	18 Minutes	05 Minutes	33 Minutes
121 WRAPPED	Wrapped / Porous loads	18 Minutes	10 Minutes	38 Minutes
134 FAST	Unwrapped instruments	05 Minutes	05 Minutes	25 Minutes
134 WRAPPED	Wrapped / Porous loads	05 Minutes	10 Minutes	30 Minutes

TECHNICAL SPECIFICATION (N CLASS AUTOCLAVES – 16L & 23L)

CHAMBER CAPACITIES		
SPECIFICATION	16LTR	23LTR
OVERALL PRODUCT WIDTH	450 mm	450 mm
OVERALL PRODUCT HEIGHT	368 mm	368 mm
OVERALL PRODUCT LENGTH	480 mm	640 mm
CHAMBER DIAMETER	236 mm	236 mm
CHAMBER LENGTH	370 mm	540 mm
BASE BUSH (W × W)	335×420 mm	478×420 mm
MAX LOAD (NON-VACUUM)	4 Kg	5 Kg
RACK PLATE SIZE (L × W × H)	11.5 x 6.7 x 0.6 in	18.3 x 6.7 x 0.6 in
CHAMBER OPERATING SPECIFICATION		
OPERATING TEMPERATURE	0–148°C	0–148°C
OPERATING PRESSURE	0–2.45 bars	0–2.45 bars
ELECTRICAL SPECIFICATIONS		
VOLTAGE / WATTAGE	230V / 1600W	230V / 1800W
BAND HEATER ISOLATION	3.5 KV	3.5 KV
FREQUENCY	50–60 Hz	50–60 Hz
NOISE LEVEL (1M DISTANCE)	53.6 dBA	53.6 dBA
NOISE LEVEL (FRONT)	62.2 dBA	62.2 dBA
CHAMBER COMPONENT MATERIAL		
VESSEL	Stainless Steel 316 – S15	Stainless Steel 316 – S15
LID	Stainless Steel 316 – S15	Stainless Steel 316 – S15
TRAY	Aluminium 6061	Aluminium 6061



No. 40, 2nd Main Road, Pete Channappa Indl. Estate, Kamakshipalya,
Magadi Main Road, Bangalore 560 079.

 **80500 82373**

 Off.: 80500 82373 / 90710 87312

 sales@confidentelectronics.com