

ET02 Subsea Thruster


Product information:

1. Rated 2.3 kgf dynamic thrust, 150m depth
2. Corrosion-resistant and composite SS 316 bearings
3. With high-efficiency fluid simulation structure
4. Greater thrust and higher efficiency
5. High-power brushless motor, reliable and durable



Indicators	Parameters
12V maximum forward thrust	1.5 kgf (2A)
12V maximum reverse thrust	1.2 kgf (2A)
16V maximum forward thrust	2.5 kgf (3A)
16V maximum reverse thrust	2.3 kgf (3A)
Thrust rated power (150W)	2.7 kgf
Operating voltage	12V
Maximum current	20A
Rated power	240W
Weight	In air: 200g; The water 100g
Maximum working water depth	100m
Working environment	Fresh water, seawater

Product dimentions:

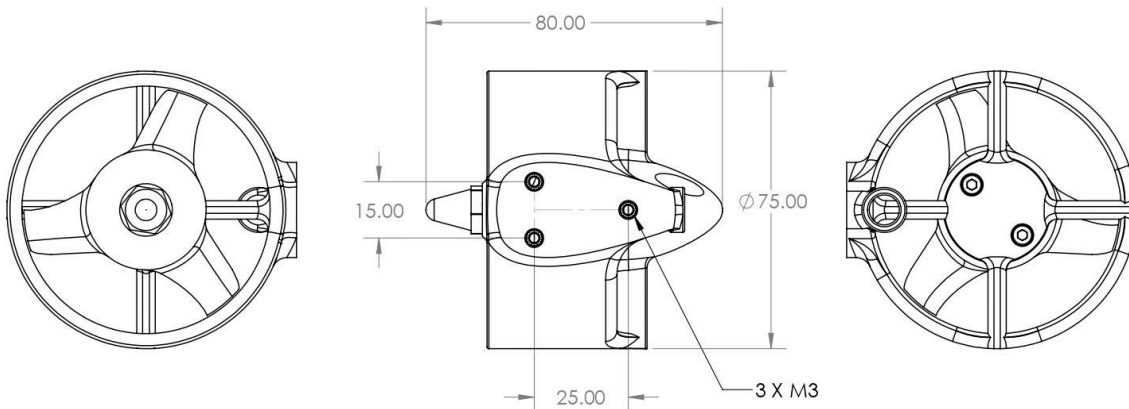

EUSTANCE TECHNOLOGY

Reg.Off. 2-13 Kasper square -Laxmipura Road, Vadodara - 390023. Gujarat, INDIA

Mobile No.: +91 99980 94801 | Email: eustancetech@gmail.com

GSTIN/UIN: 24GDJPS4636G1Z8