GENERATOR QUOTATION

TEMS-DEMO-COMPARE
12 Oct 2026 / R01


Prepared for

Sample Industries Pvt. Ltd.

Kolhapur, Maharashtra

Power, your way.

2 capacity options / Twin genset systems

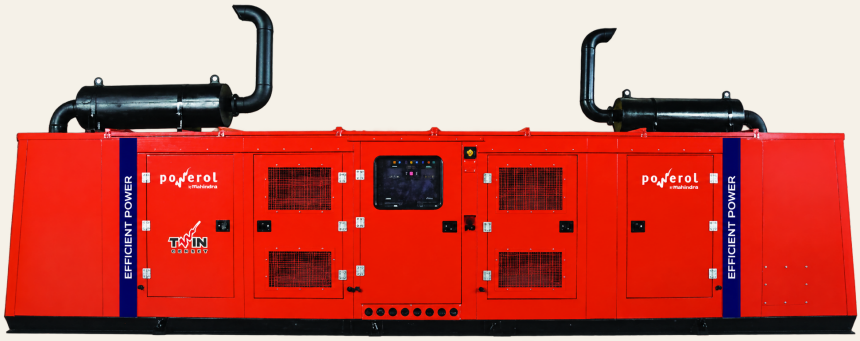

Representative product artwork. Configuration varies by model.

OPTION 01

400 kVA

200 x 2 kVA / Qty 1

Subject to supplier confirmation

OPTION 02

500 kVA

250 x 2 kVA / Qty 1

Configuration details inside

YOUR PROPOSAL

Equipment details / Your offer / Commercial terms

Review the equipment, followed by pricing and commercial terms.

REFERENCE

Meeting / 11 Oct 2026

Earlier quote: TEMS-DEMO-001 / R00 dated 2026-10-12

VALID UNTIL 20 OCT 2026

The price schedule is followed by the final commercial terms.

01 / EQUIPMENT FEATURES


DG features

Built around your power requirements.

Applies to: 500 kVA (250 x 2) / 3 Phase

Product salient features

- Twin-engine arrangement supports parallel or single-engine operation to match changing demand.
- Intelligent load sharing and selective engine operation support efficient partial-load running.
- Dual-unit architecture provides redundancy and operational flexibility during maintenance or component issues.
- Designed for fluctuating power requirements, with benefits for non-linear loads and motor starting described in the brochure.
- Coordinated monitoring and maintenance support uptime and equipment life.
- Remote monitoring through app and web platforms supports generator or fleet oversight.

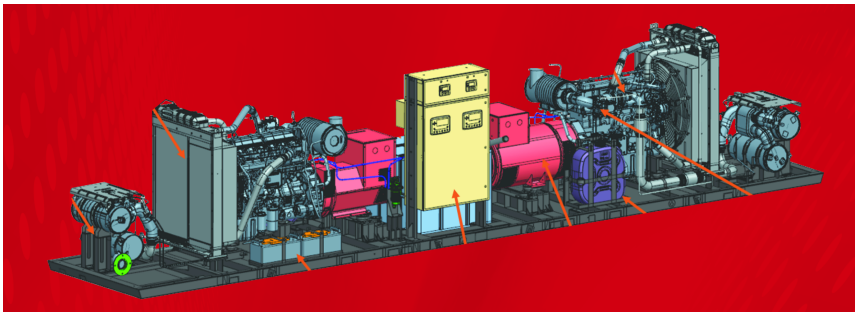

Twin-system illustration from the supplied brochure. Representative arrangement.

ENGINE

- Mahindra H6935G1 electronic engines with TCIC aspiration.
- Six cylinders per engine (6 x 2); displacement 9.3 x 2 L.
- Engine speed: 1500 rpm. Starting system: 24 V.
- Rated engine output: 620 hp, as printed in the brochure.
- Lubricating oil capacity: 35 x 2 L. Coolant capacity: 31 x 2 L.
- Lubricating oil change interval: 500 operating hours.

The brochure prints 620 hp without explicitly identifying it as a per-engine or combined value. Final engine supply details require confirmation.

ALTERNATOR

- CG / LS / Stamford or equivalent.
- IP23 enclosure with H-class insulation.
- Voltage regulation: +/- 1%.
- Maximum unbalanced load across phases: 25%.
- 415 V, three-phase, 50 Hz; 0.8 lagging power factor.
- Prime system output: 500 kVA / 400 kW.

Source: supplied Twin DG Set 500/640 kVA brochure, pages 2-7. These descriptions apply to the 500 kVA (250 x 2) configuration. Confirm the final supplied configuration before order.

01 / EQUIPMENT FEATURES

Controls & enclosure

Monitoring, protection and practical service access.

Applies to: 500 kVA (250 x 2) / 3 Phase



Representative control panel

CONTROLLER

- Intelligent synchronization and real-time monitoring coordinate the two generating units.
- Parallel and single-engine operating modes allow output to follow the load requirement.
- Automated failover capabilities support continued operation within the available generating capacity.
- Remote monitoring covers running hours, engine health, rpm, error logs and operating parameters through app and web platforms.
- Maintenance support includes A-check/B-check notifications, preventive schedules and automated maintenance reminders.
- Fuel management tracks filling events, consumption patterns and fuel traceability.

Confirm controller model, interfaces, enabled protections and connectivity scope. The illustrated AMF/control arrangement does not establish inclusion of a separately priced AMF panel.



Representative DG enclosure

ACOUSTIC ENCLOSURE

- Twin engines and alternators are arranged on a common base with a central control-panel assembly, as illustrated in the brochure.
- The illustrated arrangement includes radiators, air-filter assemblies, batteries and ATS assemblies.
- Integrated fuel-tank capacity: 780 L. DEF tanks: 50 + 50 L.
- Approximate overall dimensions (L x W x H): 8800 x 1600 x 1975 mm.
- Cold-starting system, PMG, RTD, BTD, space heater and external AVR are listed as optional accessories.

Confirm enclosure finish, acoustic rating, temperature range and certification. Optional accessories are included only when expressly priced in the quotation.

Source: supplied Twin DG Set 500/640 kVA brochure, pages 2-7. These descriptions apply to the 500 kVA (250 x 2) configuration. Confirm the final supplied configuration before order.

400 kVA (200 x 2): product, engine, alternator, controller and enclosure details require supplier confirmation. The features above do not apply to this pending configuration.

02 / EQUIPMENT DETAILS

Technical specifications

The equipment behind your quotation.

400 kVA (200 x 2)

3 Phase / Option 1

Configuration: 200 kVA x 2 (one twin system)

Total requested capacity: 400 kVA

Technical specifications: To be confirmed with supplier

Requested 200 kVA x 2 configuration. Not covered in the supplied brochure. Technical specifications and availability to be confirmed with supplier.

Product features, engine and alternator models, starting system, electrical specifications, controller and enclosure details require supplier confirmation.

500 kVA (250 x 2)

3 Phase / Option 2


TWIN GENSET

Model: MT500DR

Power: 400 kWe

One quoted unit is one complete system with two internal DG units.

Representative image. Final specification and supply scope are as quoted.

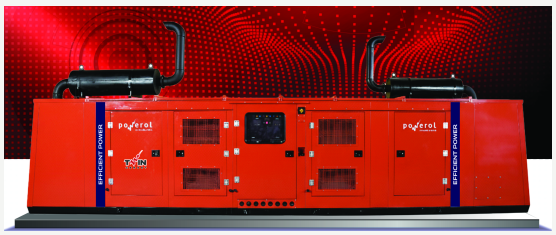

Specification	Details
Configuration	250 kVA x 2 (one twin system)
Genset model	MT500DR
Duty / power	Prime / 500 kVA / 400 kW
Output	415 V / 3 phase / 50 Hz
Current / power factor	695 A / 0.8 lagging
Speed	1500 RPM
Engine model	Mahindra H6935G1 (electronic)
Rated engine output (as printed)	620 hp
Cylinders / displacement	6 x 2 / 9.3 x 2 L
Fuel tank	780 L
DEF tank	50 + 50 L
Starting system	24 V
Approx. dimensions (L x W x H)	8800 x 1600 x 1975 mm

Source: supplied Twin DG Set 500/640 kVA brochure, pages 4 and 6. Dimensions are approximate. Confirm current availability and applicable emission certification before order.

03 / YOUR OFFER

Price schedule

PREPARED FOR

Sample Industries Pvt. Ltd.

Kolhapur, Maharashtra

Attn: Purchase department

QUOTATION REFERENCE

TEMS-DEMO-COMPARE

Lead: DEMO-001

Meeting / 11 Oct 2026

Previous quotation: TEMS-DEMO-001 / R00 dated 2026-10-12

DEMONSTRATION ONLY. Illustrative prices; not a commercial offer.

OPTION 01

400 kVA (200 x 2)

TOTAL INCLUDING GST

INR 42,71,600.00

Description	Qty	Unit rate INR	GST INR / rate	Amount incl. GST, INR
Mahindra Powerol 400 kVA (200 x 2) - 3 Phase	1	36,00,000.00	6,48,000.00 @ 18%	42,48,000.00
Transportation (per offer)	1	20,000.00	3,600.00 @ 18%	23,600.00
Basic amount INR 36,20,000.00				GST INR 6,51,600.00

Offer notes: Illustrative price only. Configuration and technical details require supplier confirmation.

400 kVA (200 x 2): technical specifications and availability to be confirmed with supplier.

OPTION 02

500 kVA (250 x 2)

TOTAL INCLUDING GST

INR 53,39,500.00

Description	Qty	Unit rate INR	GST INR / rate	Amount incl. GST, INR
Mahindra Powerol 500 kVA (250 x 2) - 3 Phase	1	45,00,000.00	8,10,000.00 @ 18%	53,10,000.00
Transportation (per offer)	1	25,000.00	4,500.00 @ 18%	29,500.00
Basic amount INR 45,25,000.00				GST INR 8,14,500.00

Optional extras - excluded from the offer total

Description	Qty	Unit rate INR	GST INR / rate	Amount incl. GST, INR
AMF panel	1	80,000.00	14,400.00 @ 18%	94,400.00

Optional extras total incl. GST: INR 94,400.00

04 / THE DETAILS THAT MATTER

Commercial terms

A clear scope, from order to delivery.

Pricing & taxes	All amounts are in INR. The offer total includes GST at the itemized rates. Separately listed optional extras are excluded.
Offer validity	8 days from 12 Oct 2026; valid until 20 Oct 2026. Prices are subject to reconfirmation after this date.
Payment	100% advance for immediate delivery, or 30% advance with the order and the balance 70% against pro forma invoice before dispatch.
Delivery	2-4 weeks from receipt of order and advance, subject to availability and written confirmation.
Warranty	As per the applicable manufacturer warranty for the selected model, to be confirmed in the order acknowledgement.
Scope of supply	Supply is limited to the equipment and services explicitly priced as included in this quotation. Optional items are excluded from the offer total unless accepted separately.
Exclusions	Unpriced unloading, civil foundation, earthing, power and control cabling, exhaust piping, changeover switches and installation are excluded. Statutory approvals are to the customer account. Transit insurance is excluded unless expressly included in a priced line.
Additional terms	SAMPLE DOCUMENT. Replace all example prices and customer details before use. Customer to mention GST/TAN/PAN and date on the purchase order. If delivery is deferred, a revised schedule and any price implications will be mutually agreed. Cancellation charges: 2.5% of the basic order value. Disputes are subject to arbitration under the Arbitration and Conciliation Act, 1996, at the applicable jurisdiction.
Capacity selection	The capacities are alternative offers under one lead. Please specify your selected option and any accepted optional extras in the purchase order.

READY TO TAKE THE NEXT STEP?

We look forward to supporting your power requirement.

For Techno Electromechs

Venkatesh Bhat

9823012044 / 9022330752

techno.tems@gmail.com

Registered address: 54/15 A, SHRI-NIVASA, Near Vasantrao Chougule School, Morewadi Road, Kolhapur - 416004
Sales office: Opp. Sudharshan Petrol Pump, near Bagavati Mangal Karyalay, NH-04, Gokulshirgaon, Kolhapur - 416234.