


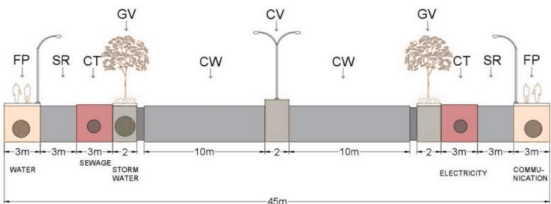
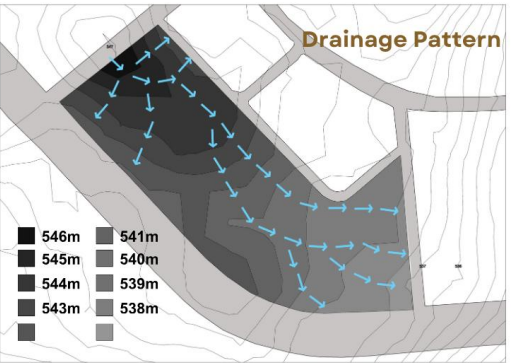


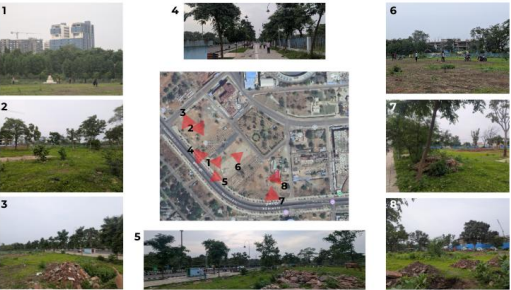

SITE ANALYSIS

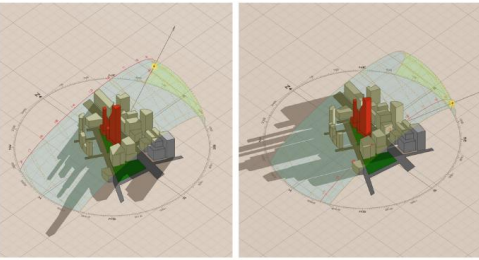


ROAD SECTION

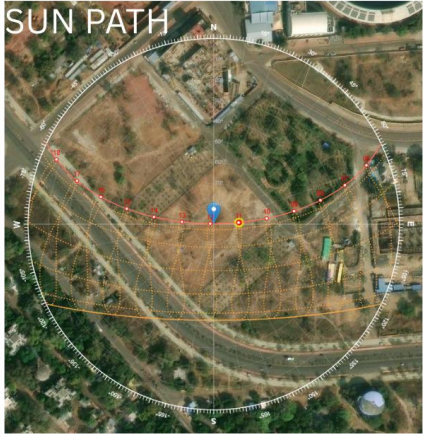

SUMMER 7:30 in the morning winter 7:30 in the morning

- 1.The position of shadow during the summers and the winters is different due to the different sun path during these period
- 2.The position of shadow during the summers and the winters is different due to the different sun path during these period
- 3.These illustrations suggest that the placement of outdoor open elements should on the northern side to protect them from the summer sun
- 4.On the other hand we can also differentiate the between the sitout zones and placement for different season

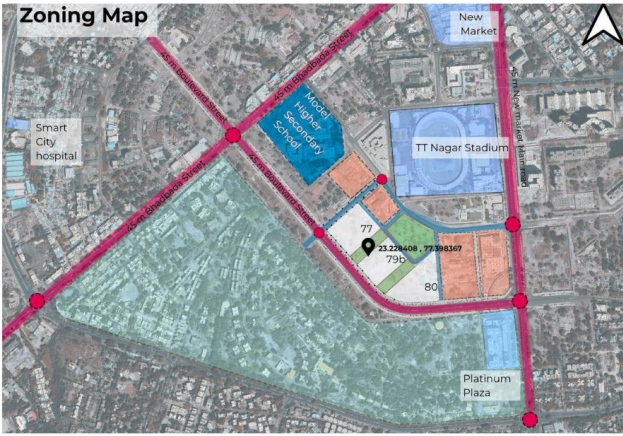


Site - 79b + 77

- Embedded within a stable residential enclave, offering consistent footfall from nearby households.
 - Geometrical constraints may pose challenges for efficient floorplate planning and circulation.
 - Future developments nearby with greater commercial intensity could dilute its relevance.
- The site does not front a primary urban axis, limiting visibility and passive exposure.
- Strong candidate for a low-rise, mixed-use typology that integrates with domestic routines.
- Potential to pilot sustainable, small-format developments with minimal ecological footprint.

- ☐ 546m SUITABLE FOR SUBSTATION AS IT IS ON HIGHEST POINT AND CLOSEST TO ROAD
- ☐ 545m TO SUITABLE FOR MAIN STRUCTURE AND LANDSCAPING
- ☐ 538m
- ☐ 537m SUITABLE FOR STP

SITE SECTION

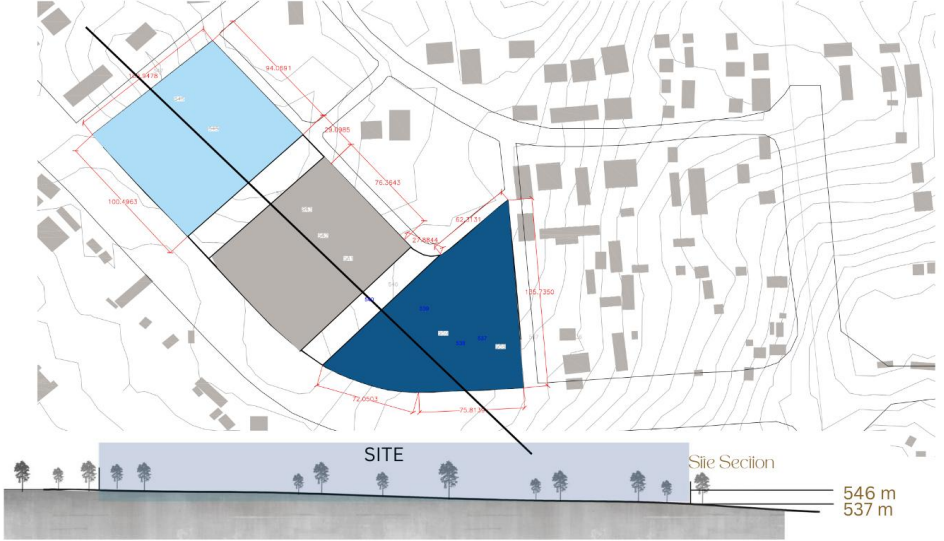

LITERATURE CASE STUDY

Introduction


RadissonBlu,INDORE

Address -12, Ring Rd, Scheme No 171, Indore, Madhya Pradesh 452010
Year built - 2010
Site area - 378816sqmts
Built up - 35206 sq mts
Number of floors - 09
Basement - 03
Total number of rooms - 210

Connectivity

Devi Ahilyabai Holkar Airport - 13.8 km
Indore Junction - 6.2 km

Building section

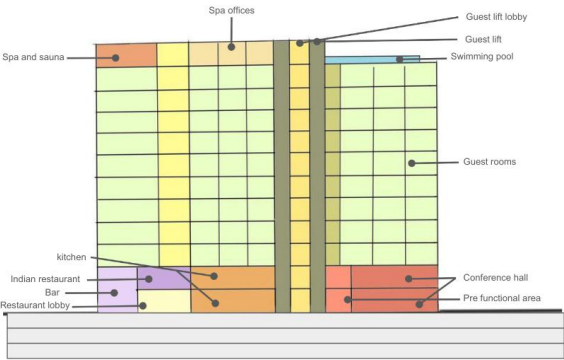

Basement

Laundry

Number of washing machines - 4
Capacity of washing machines - 60 kg each
Number of Dryers - 3
Capacity of dryers - 60 kg each
Ironing machine - 1

HVAC

Number of chillers - 4
Capacity of chillers - 300 TR each

Acoustic soundproofing panels called Glass wool in HVAC plant room

Fire water tank
3 water tanks of each 175000 L

Different sizes of column


- Column 1 - 0.9 x 0.8 M
- Column 2 - 0.8 x 0.4 M
- Column 3 - 0.5 x 0.5 M



CASE STUDY:

MULTISTAR HOTEL DESIGN - COMPARATIVE ANALYSIS					
PARAMETERS	STANDARDS	THE PARK	IMAGE	INFINITI HOTEL	IMAGE
1. Site Planning					
Site Area & Orientation		10000 SQ.M.		5000 sq.m	
Setbacks (as per local building codes)	min. 3 m from all sides (depends on the height of the building and width of access road)	not known		not known	
Building height	"The maximum height of building shall not exceed 1.5 times the width of road abutting plus the front open space, subject to the requirement of front open space of a maximum of 16 m"	9 floors		5 floors	
FAR/FSI (Floor Area Ratio)	0.75 - 2.50 (depends on the zone of the site + premiums available)	not known		not known	
Access Roads & Hierarchy		Frontage on MR-10 arterial road, wide service lane + drop-off bay		Located on service road near Bombay Hospital, entry directly from secondary road	
Drop-off zones (Valet, VIP, Taxi)		Dedicated porte-cochère with valet + VIP drop-off		Single shared porch/drop-off for guests, valet managed	
Entry/Exit for Guests	Main guest entry must be from a single, primary entrance.	Main guest entry on MR-10 frontage. Landscaped visual axis to entry. Water feature present		Single primary entry for guests. Wall feature and landscaping present	
Entry/Exit for Staff, Service	Service access (loading docks) must be separate, weather-covered, and hidden from guests.	Service access from rear lane, hidden		Service access from side lane (not completely hidden)	
View Corridors and Site Lines		Green frontage to east, City views			
Climate responsiveness (Wind, Sun)		North-south orientation; shading devices + landscaped courts; pool courts act as microclimate		Compact block; relies on glazing, shading with limited green cover, not highly climate-responsive	
2. Guest Rooms & Suites					
Capacity		1000			
Room Types: Standard, Deluxe, Executive, Suite, Presidential	50 - 60% of built up area, 2% of hotel rooms as suites	120		49	
Room Sizes	Luxury Hill side view: 30.6 sq.m Luxury pool side view: 30.6 sq.m Premium garden view: 34 sq.m Studio Suite: 42 sq.m Emerald Suite: 54 sq.m Presidential Suite: 106 sq.m			Standard: Deluxe 30 sq.m Executive 37 sq.m Presidential: 42 sq.m	
Corridor Width	1.2 m	1.8 m		1.5/1.8 m	
Views from rooms		Beautiful view of greenery and the city skyline from most rooms		View of Urban frontage from most rooms	
3. Public Areas & Amenities					
Main Lobby		25 - 30 SQ.M			
Reception & Concierge	4 - 7% of built up area	30-40 SQ.M		69 sq.m	
Lounge Spaces (waiting, business)		30-40 SQ.M		20 sq.m	
Restaurants: Types	1.6 sq. m. for each seat and 0.5 sq. m. of kitchen area for each seat	Capacity for 120		present	


MULTISTAR HOTEL DESIGN - COMPARATIVE ANALYSIS					
PARAMETERS	STANDARDS	THE PARK	IMAGE	INFINITI HOTEL	IMAGE
Cafe / Bakery / Bar / Rooftop Lounge		present		Holbrook cafe/Bar Bodywood Thika Tyger Tyger Jinnos	
Multipurpose Halls / Banquet Halls	mahtar: 567.8 sq.m (350) revast: 279 sq.m (186) Tower: 160 sq.m (105) The lawn: 2136.7 sq.m (1000) The Tamarind Tree: 930 sq.m (500)			Indigo Grande Hall: 659 sq.m Golden Terrace Holbrook Prime: 233 sq.m	
Conference Rooms		not known	not known	Board Room: 78 sq.m Galaxy (meeting room): 46 sq.m	
Swimming Pools (indoor, outdoor, temperature controlled)		5 x 15 m (approx)		None present	None present
Spa & Sauna Facilities		not present	not present	not present	not present
Wellness Center	5-10% of built up area	not present	not present	not present	not present
Gymnasium & Yoga Studio		present		100 sq.m	present
Clubhouse / Members Lounge		not present	not present	not present	not present
Salon & Retail Boutiques		not present	not present	not present	not present
5. Circulation & Vertical Transport					
Corridors	travel dist to exits should be no more than 22.5 m; min. 1.5m - 2.4m wide as per occupancy)			2 m wide corridors	
Guest Elevator	Guest lift per 100 rooms +1.3	Nos = 5,		Nos = 3	
Service Elevator	service lifts per 100 rooms +1	Nos = 4		Nos = 1	
Staircase: Width, Landing, Fire stair	Min. width - 1.6 m; min. tread - 25 cm max. riser - 17 cm	present	present	Width: 900 mm riser: 170 mm	
Loading Bay & Service Docks		present	present	900 mm wide ramp	
7. Parking & Vehicle Management					
Surface Parking		19			
Basement Parking	1 ECS for every 4 guest rooms; 1.00-2.00 ECS per 100 sqm of floor area	22		single level basement	
Off street parking	One parking space for every 3 guest rooms (population between 1,000,000 - 5,000,000)				
8. Fire Safety					
Fire Escape Staircases	Width of staircase: 1.0 m. Internal stairs shall be constructed of non-combustible materials throughout, and shall have fire-resistant rating of minimum 120 min	present		present	

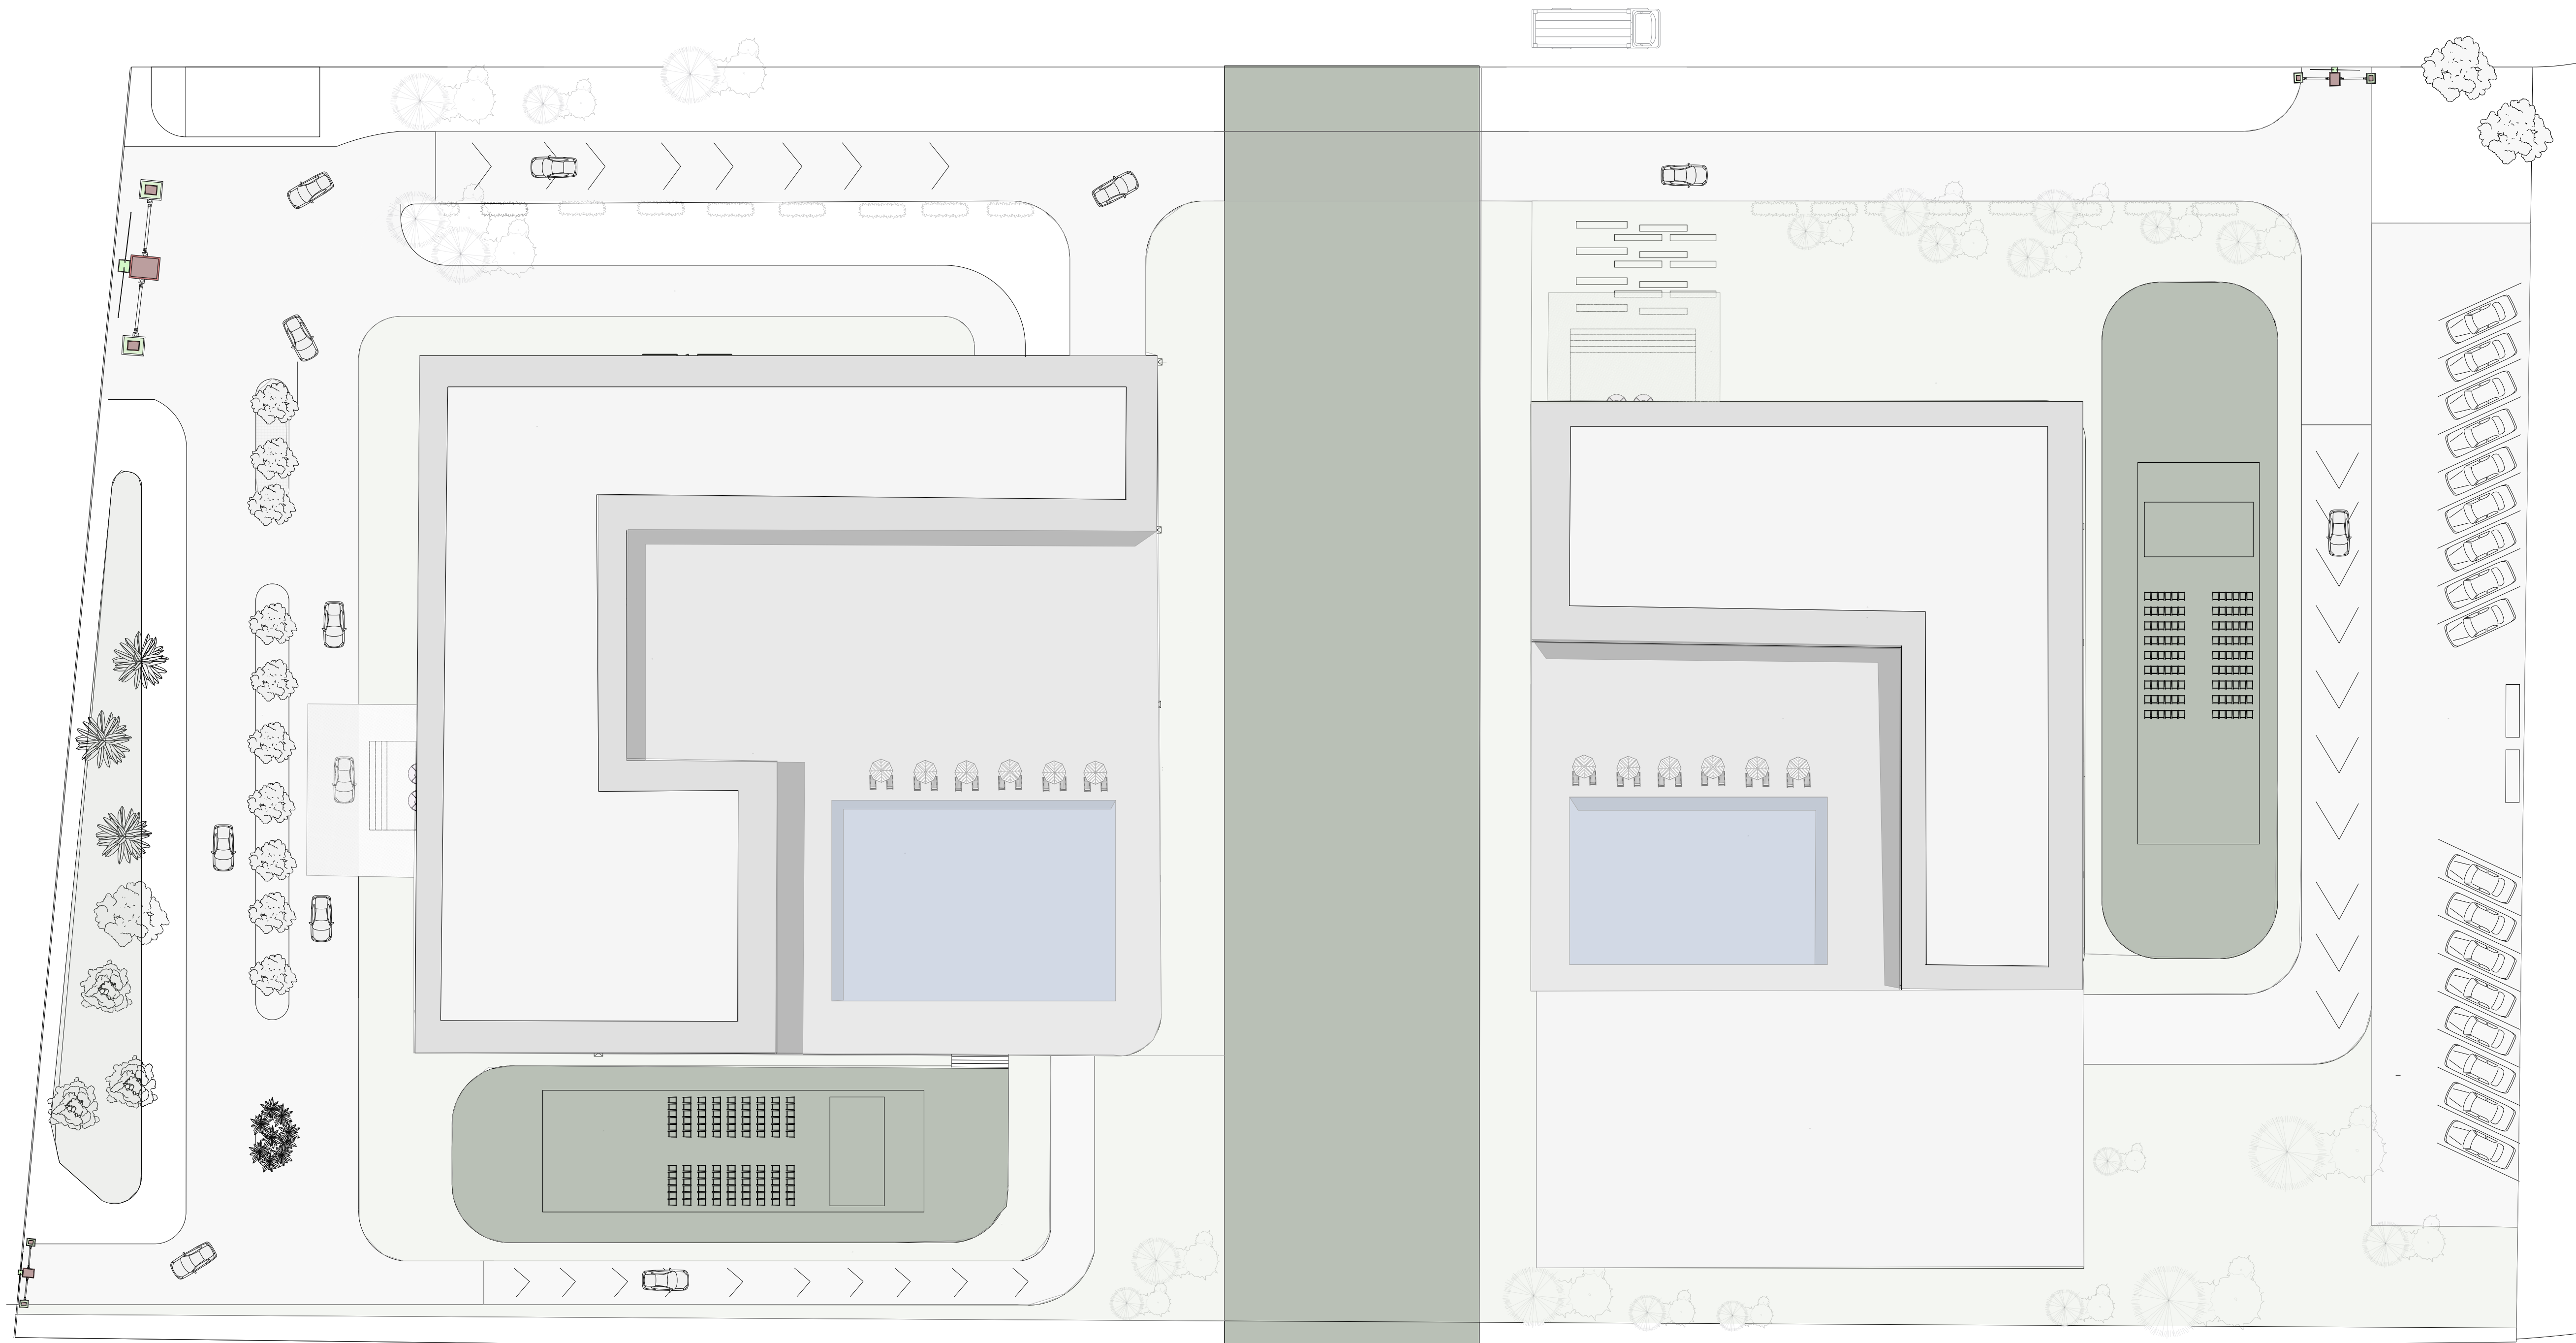

- LEGENDS :
- ① Entrance
 - ② Hotel 1
 - ③ Hotel 2
 - ④ Entrance
 - ⑤ Exit
 - ⑥ Parking


0

PRIYANSHU SAWANT
2022BARC015



SITE PLAN

HOTEL

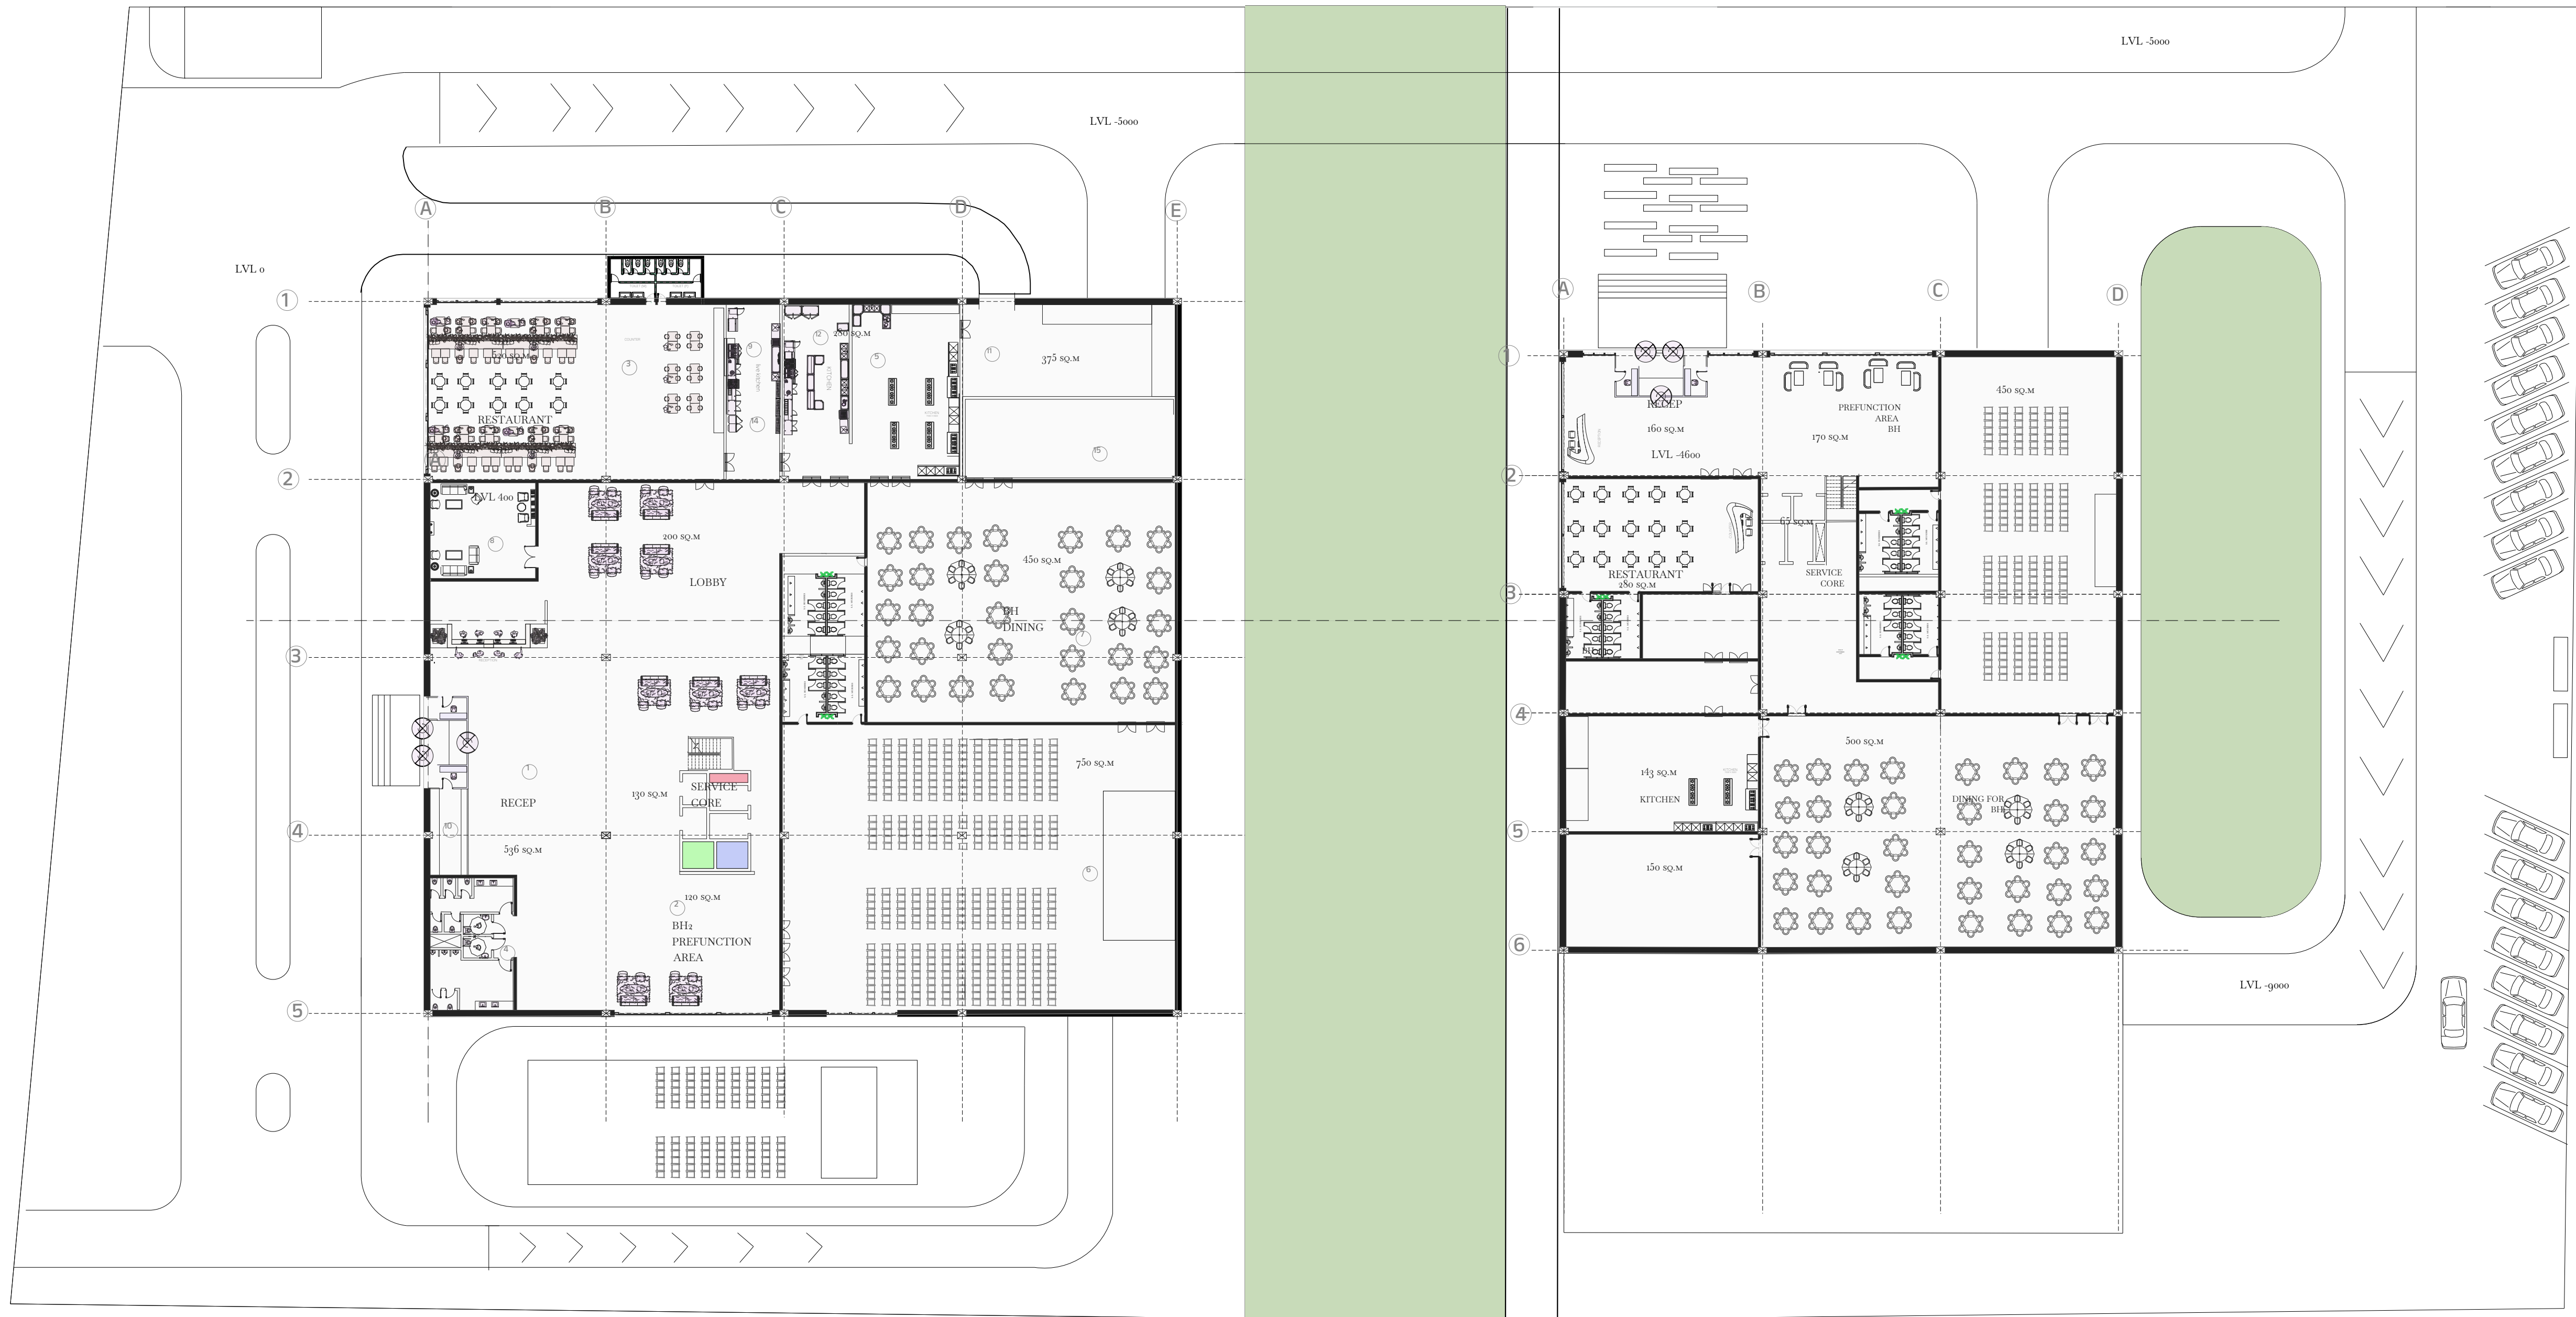

LEGENDS :

1 Reception

2 Pre-Function Room

3 Restaurant

4 Washroom

5 Kitchen

6 Banquet Hall

7 Banquet Dining

8 VIP Lounge

9 Live Kitchen

10 Luggage Room

11 Kitchen Storage

12 Preparation Area

13 Kitchen

14 SERVING AREA

15 BANQUET STORAGE

Plumbing Duct

Electrical Duct

HVAC System Duct

