

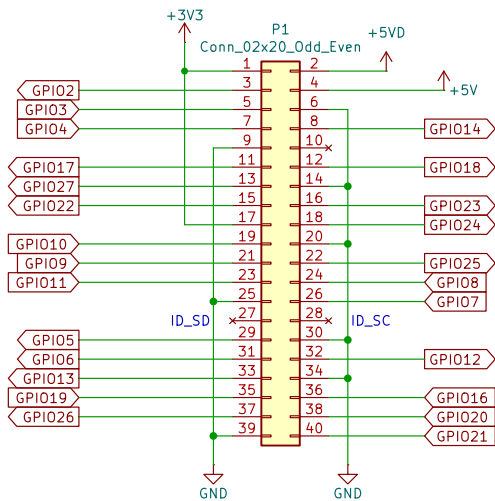



モータドライバ



Joystick

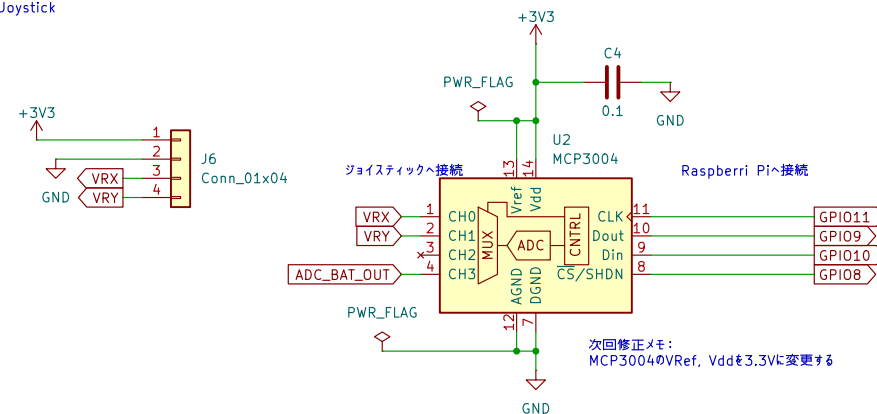

インジケータ

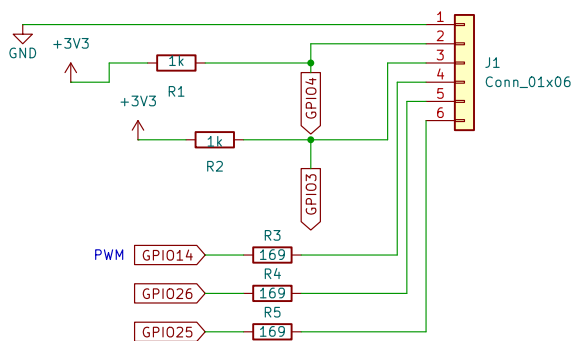

Mounting Holes




ID_SD and ID_SC PINS:
These pins are reserved for HAT ID EEPROM.


At boot time this I2C interface will be interrogated to look for an EEPROM that identifies the attached board and allows automatic setup of the GPIOs (and optionally, Linux drivers).

DO NOT USE these pins for anything other than attaching an I2C ID EEPROM. Leave unconnected if ID EEPROM not required.


モータ切替

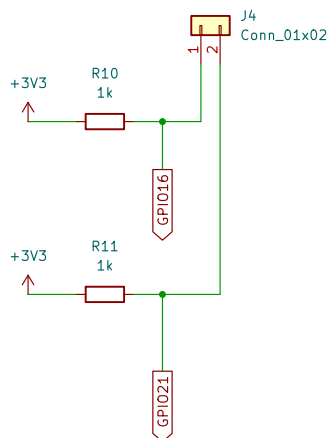

Encoder(EH connector)

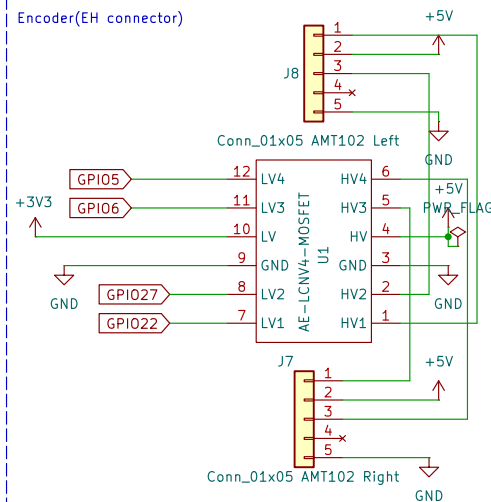

ブザー



Joystick



ファイル: Joystick.kicad_sch


Sheet: /
File: Raspberry Pi Shield for TANG.kicad_sch

Title:

Size: A4
KiCad E.D.A. 8.0.1

Date: 15 nov 2012

Rev:
Id: 1/3

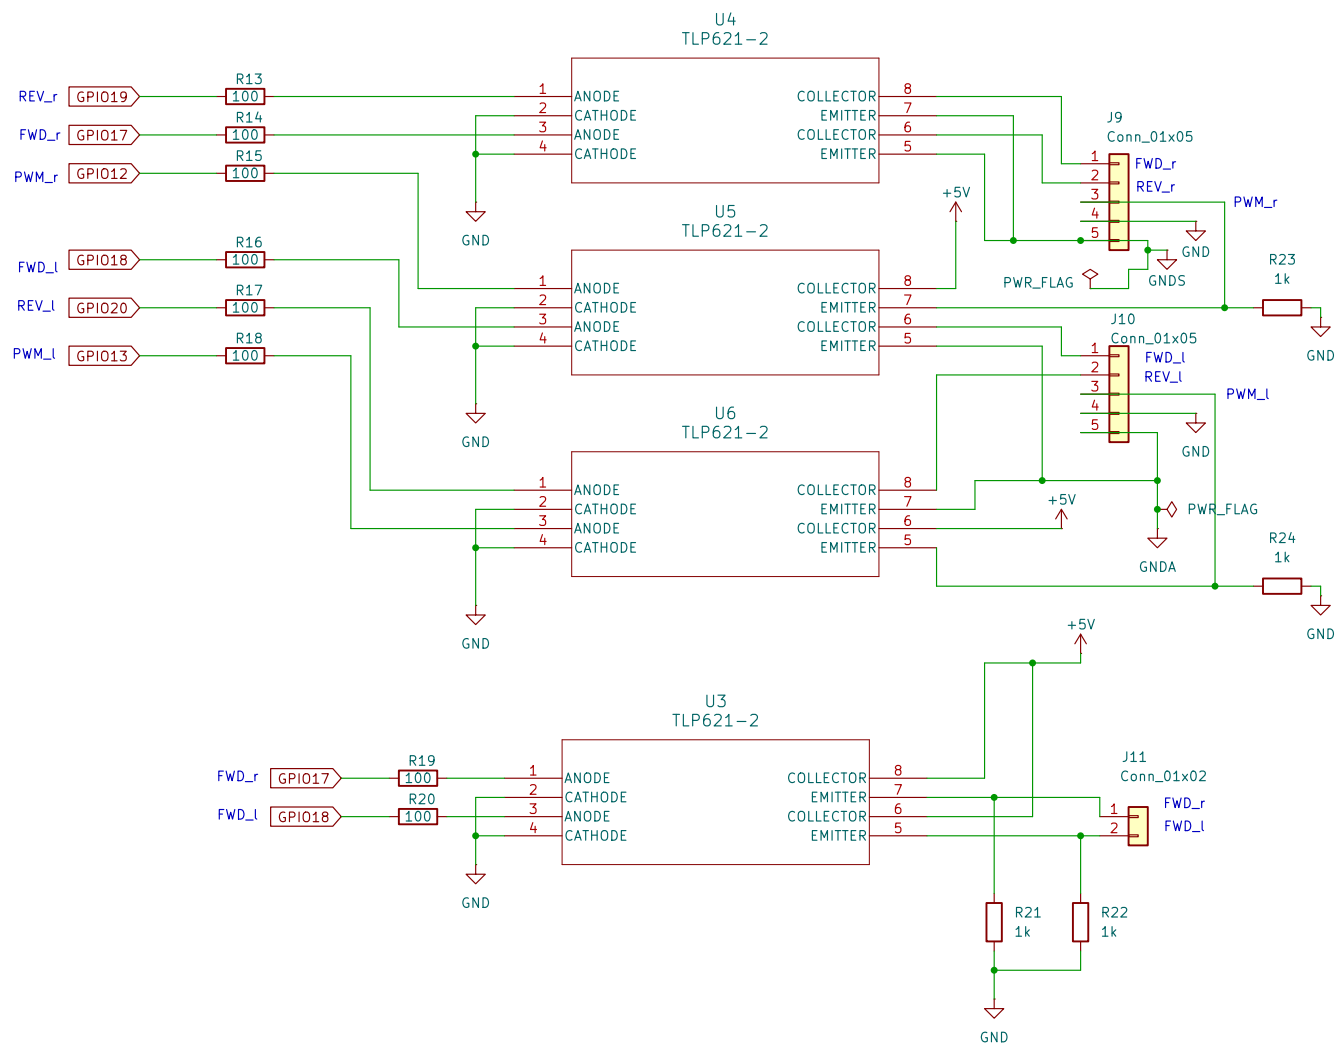

Sheet: /motordriver/
File: untitled.kicad_sc.kicad_sc.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 8.0.1

Rev:

Id: 2/3

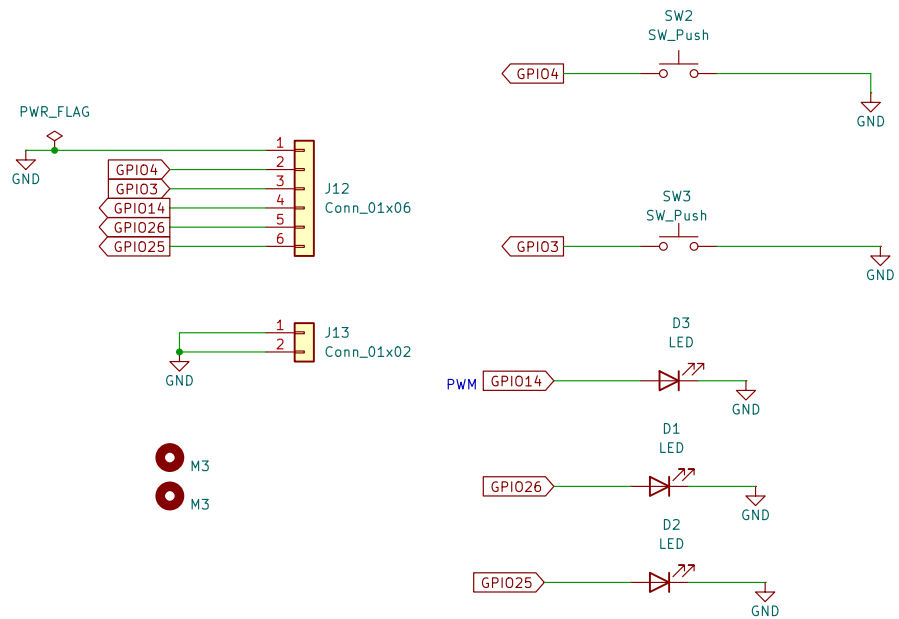

Sheet: /Joystick/ File: Joystick.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.1	Id: 3/3	