



LAKSHMI ENGINEERING ENTERPRISES

"LAKSHMI" Grid Flexible couplings are used in almost all types of industrial appliances. A complete grid coupling consists of two hubs, grid spring & covers to protect the spring. The grid spring elements are so designed that it provides sufficient resiliency for variable flexibility of a coupling and considerable damping properties making the coupling suitable for drives involving high shock loads.

Standard Couplings

Type : X,Y,Z

SELECTION OF COUPLINGS :

1. Determine service factor corresponding to type of application under consideration from the Table of Service Factors.
2. Determine the design Power (KW) by multiplying normal rated power by the Service factor of Drive
3. Determine Rating of Coupling per 100 rpm = $\frac{\text{Design Power (KW)} \times 100}{\text{Rated R.P.M of Drive}}$


Rated R.P.M of Drive

Type of Applications	Factor
Agitators	2.0
Blowers	2.0
Compressors,centrifugal/rotary	2.5
Conveyor :	
Apron,Belt,Chain	1.0
Bucket ,	2.0
Live Roll Shaker	3.0
Cranes & Hoist	
Class 1& 2 Hoists	3.0
Bridge,Travel or Trolley	2.5
Class 3 & 4 Hoists	4.0
Bridge,Travel or Trolley	3.0
Crushers,Stones & Ores	4.0
Dynamometer	2.0
Elevators,Bucket	2.5
Escalators	2.0
Extruder,Plastics/Rubber	2.0
Feeders :	
Apron,belt,Screw—Horizontal	1.0
Generators :	
Even load	1.7
Hoist or Rly,Service	2.5
Welder Load	2.5
Hammer Mill,Cement or Mines	2.5
Houllage,Mining	3.0
Kiln,Rotary for Cement,Mining	3.0
Line Shaft	2.0

Type of Applications	Factor
Machine Tools:	
Main drive	2.0
Auxillary Drive	1.5
Traverse drive	1.5
Bending Roll,Notching Press	
Planer,plate—Reversing	3.0
Mixers :	
Concrete & Muller	2.5
Paper Mill	1 to 5.0
Fans :	
Cooling Tower & Mine	2.5
Industrial	2.0
Pumps:	1.25
Centrifugal,Even Load	1.25
—do—under	1.75
Gear,Rotary or Vane	2.0
Reciprocating 1 or 2 Cyl.	3.0
—do—3 or more Cyl	2.5
Rubber Industry :	
Mixing Mill,Retainer	1.0
Worming Mill	
others	
Screens :	1.7
Rotary,Coal or sand	2.5
Vibrating	2.5
Steel Mills/Rolling Mills 2+0	2.5
Staker	3.0
Turbo	3.0
Winch,Manoeuvring :	2.0
Dredge,Marine	2.0
Wood Working Machinery	2.0

LAKSHMI ENGINEERING ENTERPRISES

STANDARD COUPLING-TYPE-'X' (WITH AXIALLY SPLIT COVER)

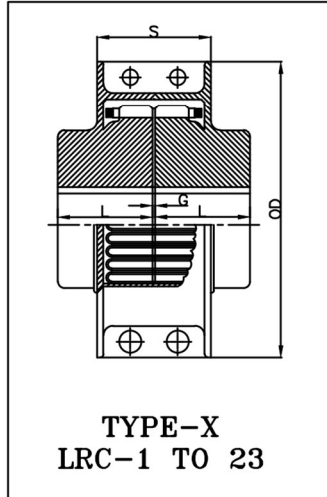



FOR USE ON HORIZONTAL SHAFTS ONLY

COUPLING NO.	RATING KW/100 RPM	CLEAR DIA OD	HUB LENGTH L	COVER WIDTH S	GAP G	PILOT BORE	BORE MAX	MAX SPEED RPM	APPROX WEIGHT KGS
LRC-01	0.44	104.0	38.0	57.0	0.85	10	29	3600	3.0
LRC-02	0.74	120.0	38.0	57.0	0.85	12	38	3350	4.0
LRC-03	1.49	127.0	44.0	64.5	0.85	16	41	3350	4.5
LRC-04	2.23	159.0	51.0	66.0	0.85	16	57	2575	7.5
LRC-06	3.35	178.0	51.0	84.5	0.85	16	54	2350	12.5
LRC-07	4.84	190.0	57.0	85.0	0.85	16	64	2150	16.5
LRC-08	7.08	222.0	63.0	86.5	0.85	25	78	1850	19.0
LRC-09	9.32	244.0	70.0	86.5	0.85	25	92	1650	27.0
LRC-10	13.80	267.0	89.0	86.5	0.85	25	108	1575	39.5
LRC-11	26.48	276.5	102.0	138.0	1.60	38	102	1450	47.5
LRC-13	33.94	324.0	101.0	157.0	1.60	50	123	1300	67.5
LRC-14	48.86	336.0	101.0	157.0	1.60	50	121	1250	74.0
LRC-15	67.50	381.0	114.0	159.0	1.60	50	146	1050	108.5
LRC-17	93.60	425.0	127.0	160.0	1.60	50	167	950	148.5
LRC-21	130.90	501.0	140.0	179.5	3.20	75	202	800	234.0
LRC-23	205.40	552.0	152.0	179.5	3.20	85	234	700	318.0

NOTE: ALL DIMENSIONS ARE IN MM

LAKSHMI ENGINEERING ENTERPRISES

STANDARD COUPLING-TYPES-'Y' & 'Z'

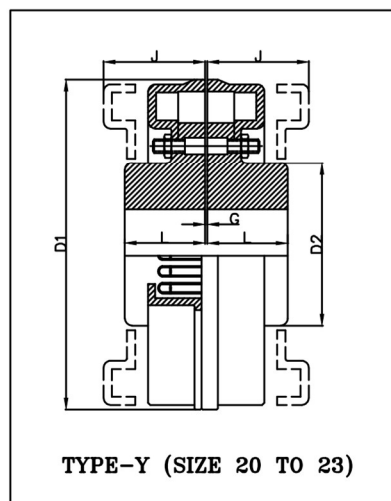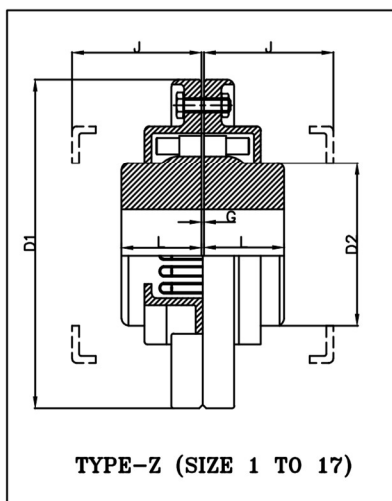

FOR USE ON HORIZONTAL SHAFTS ONLY

COUPLING NO.	RATING KW/100 RPM	D1	L	J	G	D2	MAX SPEED RPM	STOCK BORE	BORE MAX	APPROX WEIGHT KGS
LRC-01	0.44	105.0	38.0	52	0.85	44.52	5650	10	29	3
LRC-02	0.74	120.0	38.0	52	0.85	58.80	4750	12	38	4
LRC-03	1.49	144.0	44.0	59	0.85	62.00	4450	16	41	5
LRC-04	2.23	171.0	51.0	59	0.85	87.45	3400	16	57	9
LRC-06	3.35	190.0	51.0	79	0.85	84.25	3200	16	54	11
LRC-07	4.84	197.0	57.0	79	0.85	96.95	2950	16	64	15
LRC-08	7.08	222.0	63.0	79	0.85	119.20	2500	25	78	20
LRC-09	9.32	254.0	70.0	80	0.85	143.00	2150	25	92	27
LRC-10	13.80	276.0	89.0	80	0.85	165.20	1900	25	108	43
LRC-11	26.48	295.0	102.0	128	1.60	155.70	1800	38	102	54
LRC-13	33.94	324.0	101.0	147	1.60	187.46	1650	50	123	63
LRC-14	48.86	336.0	101.0	147	1.60	184.28	1550	50	121	72
LRC-15	67.50	375.0	114.0	147	1.60	222.38	1350	50	146	104
LRC-17	93.60	425.0	127.0	147	1.60	254.00	1200	50	167	149
LRC-20	130.90	432.0	140.0	179	3.20	239.50	1200	75	157	175
LRC-21	179.40	432.0	140.0	179	3.20	239.50	1200	75	157	175
LRC-22	205.40	492.0	152.0	179	3.20	266.70	1100	85	173	207
LRC-23	261.40	492.0	152.0	179	3.20	266.70	1100	85	173	216

NOTE: ALL DIMENSIONS ARE IN MM