
#4277

WHITEWALL CONCENTRATE

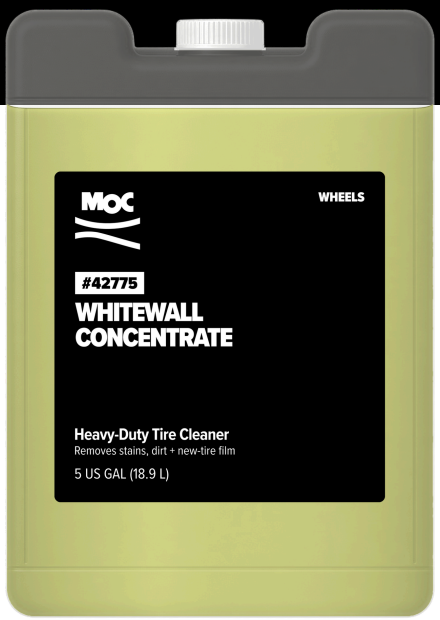

01 // OUTSTANDING FEATURES

- Use to clean the toughest jobs.
- Returns dingy side walls to bright-white original look.
- Removes color film from new tires.

02 // DESCRIPTION

An aggressive, water-based cleaning compound designed specifically to remove the most stubborn coatings, dirt, and stains from whitewall tires.

03 // SPECIFICATIONS

TEST	ASTM METHOD	TYPICAL RESULTS
Appearance	N/A	**Low Viscosity Liquid**
Color	N/A	**Yellow**
Odor	N/A	**Low Odor**
Density, U.S. (lbs/gal) @ 68°F	D4052	**~8.9**
pH	E 70	**~13.5**
RI	N/A	**~22**
Body Shop Safe	N/A	**No**
VOC Complaint	N/A	**Yes**
Biodegradable	N/A	**Yes**

04 // PACKAGING

FILL	CASE QTY	CASE WT
5 gal	1	47 lbs.

05 // APPLICATION CONTINUES ON PAGE 2

#4277 WHITEWALL CONCENTRATE

05 // APPLICATION

DIRECTIONS: TEST PRODUCT ON AN INCONSPICUOUS AREA FOR COMPATIBILITY PRIOR TO USING ON ENTIRE SURFACE. AVOID CONTACT WITH ALUMINUM, MAGNESIUM, AND PAINTED SURFACES, AS SPOTTING OR DAMAGE MAY OCCUR. ALWAYS USE IN DILUTED FORM. AVOID CONTACT WITH HUBCAPS AND RIMS.

1. Dilute product according to chart below.
2. Spray or wipe diluted solution directly onto area to be cleaned.
3. If needed, scrub surface with a brush. Do not allow product to dry on surface.
4. Rinse surface thoroughly with clean water. TYPICAL DILUTION RATIOS WITH WATER: Light Duty: 15 parts water to 1 part product. Medium Duty: 6 parts water to 1 part product. Heavy Duty: 2 parts water to 1 part product.