
#0133

A/C QUIET

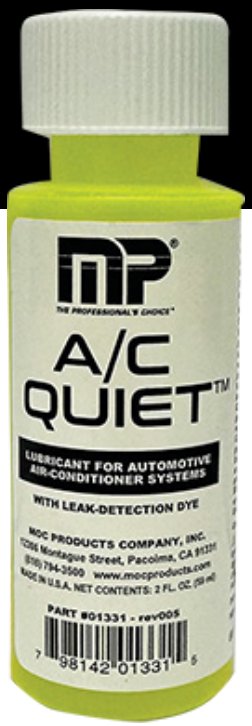

01 // OUTSTANDING FEATURES

- Compatible with R-12 and R-134a refrigerant.
- Compatible with mineral ester, paraffin, and PAG oils.
- Compatible with air-conditioning system components.
- Helps prevent rust and corrosion by neutralizing acids and encapsulating moisture.
- Helps reduce wear and noise in the A/C compressor.

02 // DESCRIPTION

A highly effective ester-based oil lubricant for automotive air-conditioning systems. This lubricant performs four key functions: 1. It lubricates the entire air-conditioner system, including the compressor. 2. It helps prevent acid from forming and inhibits corrosion. 3. It encapsulates moisture and keeps it from damaging internal parts. 4. It contains a special color dye for leak detection (under black light). Note: A/C Quiet™ should be added to a system after an A/C service, to quiet a noisy compressor, if refrigerant/oil level is low, as a preventative maintenance step and to detect system leaks.

03 // APPLICATION

A/C Quiet™ (#0133 and #0134): Add appropriate amount of A/C Quiet™ to an air-conditioner system using MOC® A/C Quiet™ Injector Tool #76004. Follow A/C system manufacturer's instructions for charging of the system. Note: #01331 (2 oz.) is typically added if the refrigerant/oil level is low if the compressor is noisy and as a preventative maintenance step. Note: #01341 (8 oz.) Is typically added when installing a new A/C unit, retrofitting from R12 to R134a after using MOC® A/C Flush #01321, and to detect system leaks.

04 // SPECIFICATIONS

TEST	ASTM METHOD	TYPICAL RESULTS
Appearance	N/A	**Clear & Bright**
Color	N/A	**Fluorescent Yellow**
Odor	N/A	**Mild**
Density (g/mL)	D4052	**0.96**
Density, U.S. (lbs/gal), calculated	D1250	**8.04**
Flash Point (°F) PMCC	D92	**355**

05 // PACKAGING

FILL	CASE QTY	CASE WT
01331 2 oz.	24	4 lbs.
01334 8 oz.	24	13 lbs.