
**#0439**

# DISPERSE

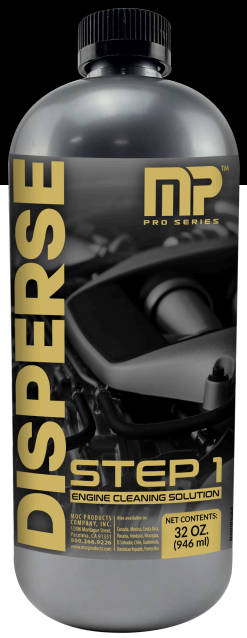


## 01 // OUTSTANDING FEATURES

- Removes oil sludge and varnish
- Reduces oil consumption
- Restores compression
- Decreased emissions

## 02 // DESCRIPTION

A concentrated blend of detergents and dispersants designed to remove stubborn engine oil deposits and buildup in problematic engines prone to sludge formation and compression loss. The service may be performed on gasoline, diesel, and rotary engines to thoroughly clean the crankcase and restore compression. Compatible with oil pumps, seals, gaskets, and other internal engine surfaces. Caution should be used in engines with excessive sludge.

## 03 // APPLICATION

FOR PROFESSIONAL USE ONLY A. Drain used engine oil from vehicle. (Optional & suggested - remove used engine oil filter and replace with new filter.) Replace drain plug. Pour DISPERSE Engine Cleaning Solution into engine through oil filler cap to the OEM capacity (5-6 quarts). B. With parking brake engaged, start engine. Set engine at 1200 to 1500 RPMs with the transmission in PARK. Allow engine to run for 45 to 60 minutes depending on severity of deposits. Switch ignition OFF. Note: DO NOT leave engine running unattended! Monitor engine oil pressure throughout procedure. If engine oil pressure drops, check the oil pick up screen for obstructions. CAUTION! Used solution may be extremely hot while draining. Use heat-resistant personal protective equipment to prevent burns or other bodily injury. C. Remove drain plug. Drain used DISPERSE solution from engine. Replace drain plug. D. Follow directions for use of #0440 RECOVER as Step 2 of the Active Engine Cleaning process.

## 04 // SPECIFICATIONS

| TEST | ASTM METHOD | TYPICAL RESULTS |
|---|---|---|
| Appearance | N/A | **Clear** |
| Color | N/A | **Yellowish Amber** |
| Odor | N/A | **Ammoniacal** |
| Density, U.S. (lbs/gal) @ 68°F | D4052 | **7.2** |
| Kinematic Viscosity, @40 oF | D445 | **15** |

## 05 // PACKAGING

| FILL | CASE QTY | CASE WT |
|---|---|---|
| **32 oz.** | 6 | |