
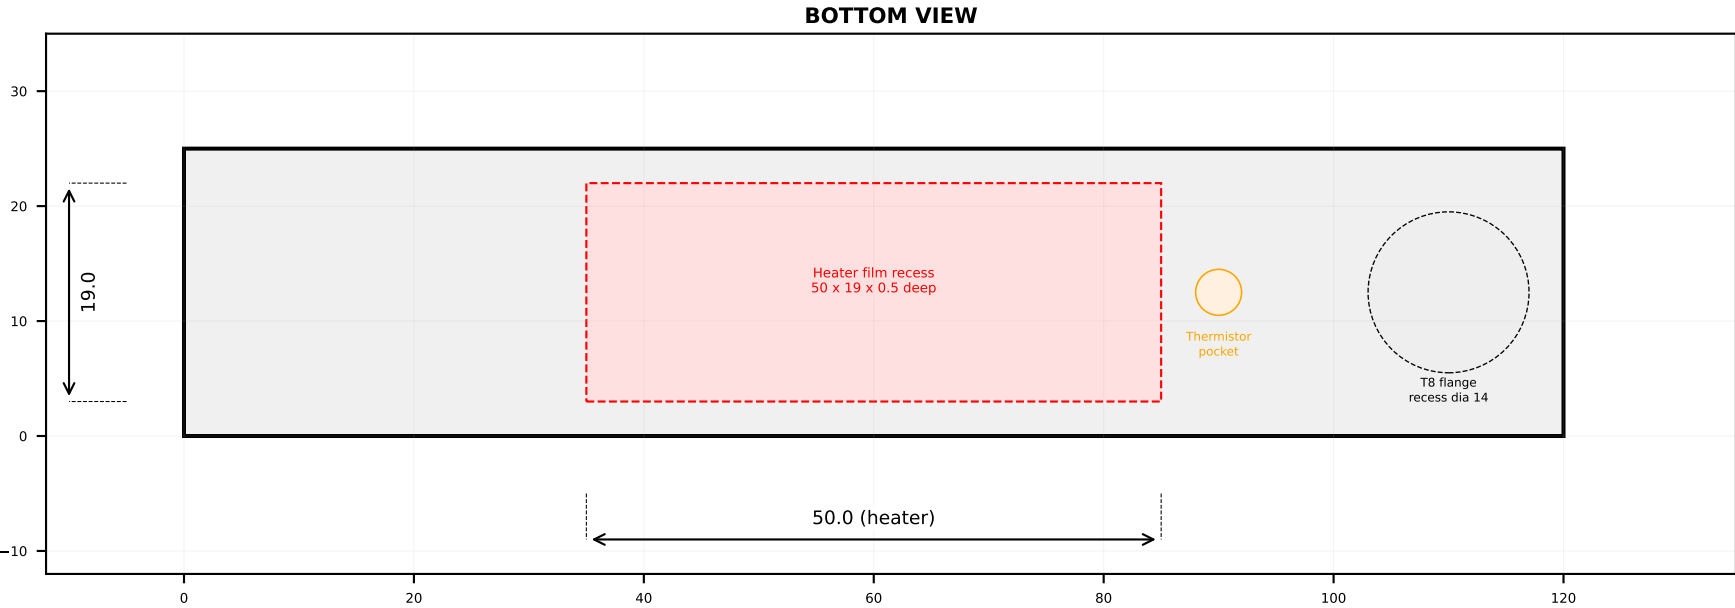


ENGINEERING DRAWING — Dipstick Measurement Tray

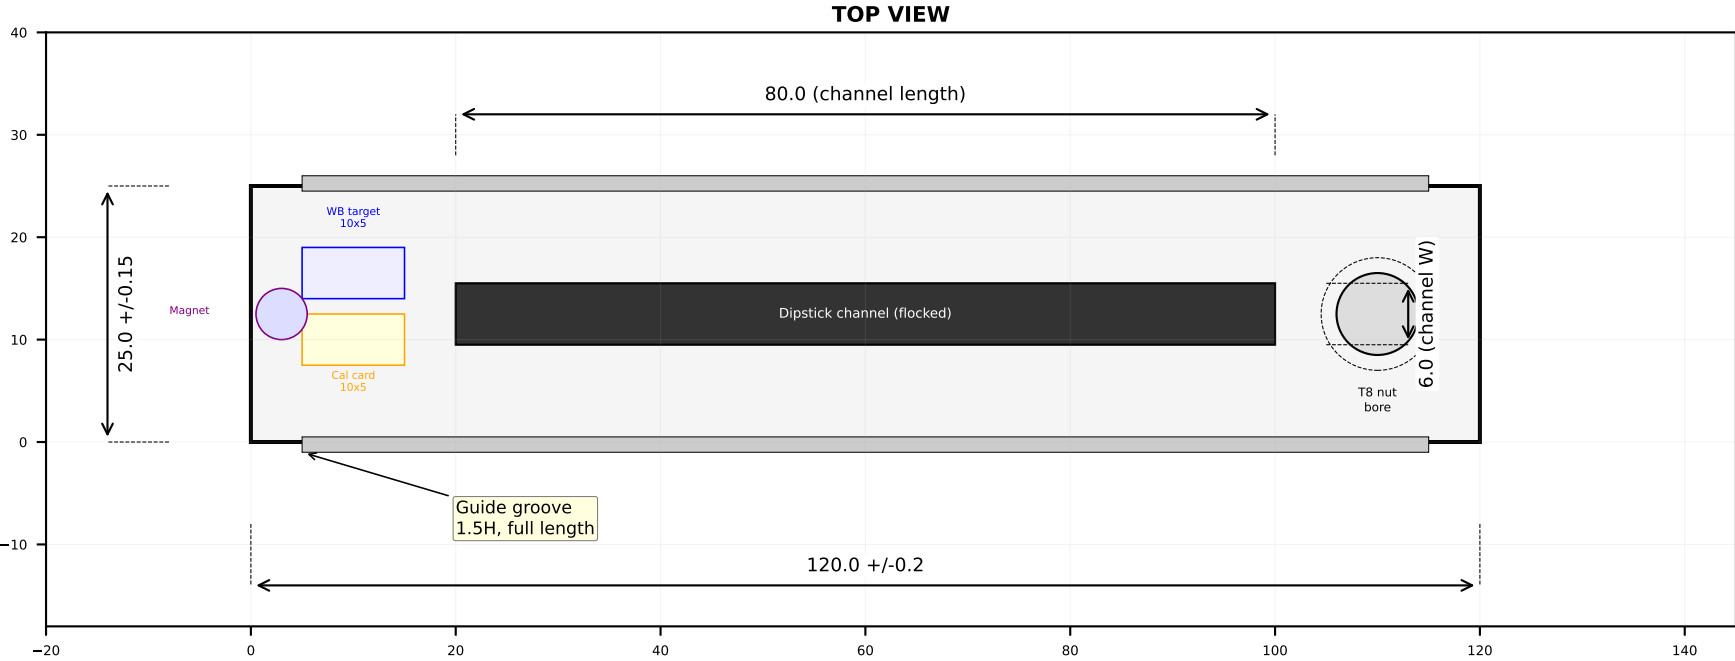

SECTION B-B

Section B-B shows the cross-section of the tray, highlighting the channel width and depth. Dimensions include a total width of 25.0 and a channel width of 6.0.

Dimensions and Features:

- 25.0 (Total Width)
- 6.0 channel
- 8.0 (Total Height)

NOTES:

- Material: ABS (injection molded)
 - No undercuts, uniform wall 2.0mm
 - 2 deg draft on all vertical faces
- Strip channel: 6.0W x 3.0D x 80.0L
 - Apply flocking sheet to channel floor
 - Surface must be matte black
- Cal card recess: 10x5mm, 0.3mm deep
- WB target recess: 10x5mm, 0.3mm deep
- T8 copper nut bore: dia 8.0 thru
 - Flange recess: dia 14.0, 1.5mm deep
 - 2x M3 mounting holes at 10mm PCD
- Heater film recess (bottom): 50x19mm, 0.5D
- Thermistor pocket: dia 4.0, 2.0mm deep
- Magnet pocket: dia 5.0, 3.0mm deep
- Side guide grooves: 1.5H x 2.0W, full L

CRITICAL TOLERANCES:

- Channel width: 6.0 +/- 0.1mm
- Channel depth: 3.0 +/- 0.05mm
- T8 bore position: +/- 0.1mm true position
- Guide groove parallelism: 0.1mm/100mm
- Flatness (channel floor): 0.05mm

Dipstick Measurement Tray	Material: ABS (injection molded)	General Tolerances:	Dims: mm
Part No: UDA-003	Scale: 2:1	Linear: +/- 0.15mm Channel: +/- 0.1mm	120 x 25 x 8