



ENGINEERING DRAWING — Internal Cable Management Frame

TOP VIEW

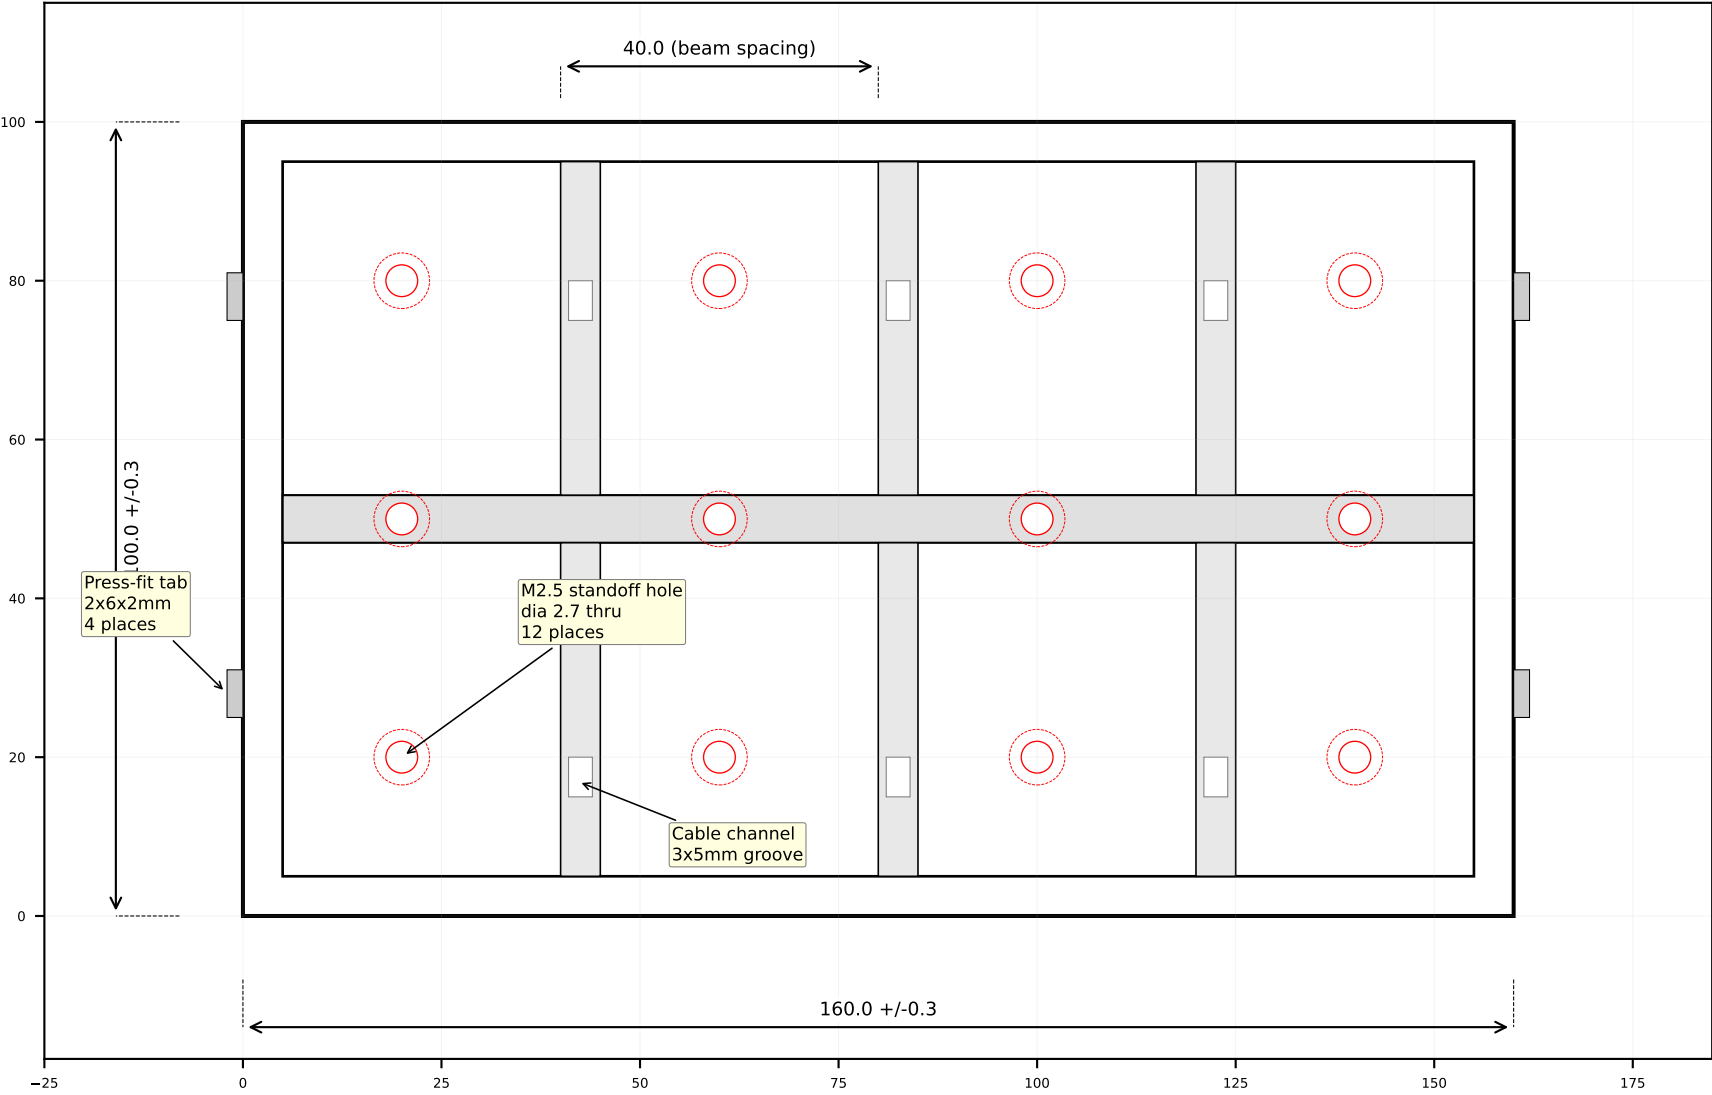

SECTION D-D

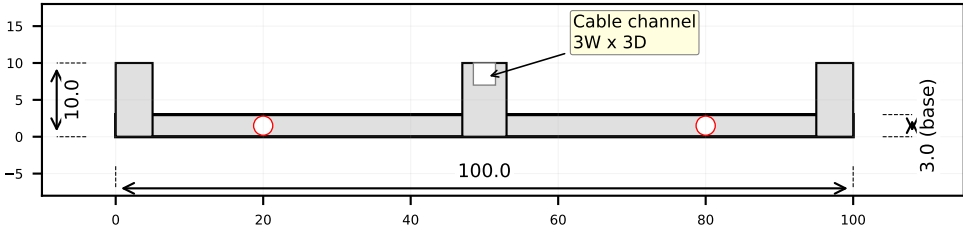

NOTES:

- Material: PETG (black, 20% infill for weight saving)
- Open skeleton design for maximum airflow
- Base plate: 3.0mm thick, beams: 5.0mm wide x 10.0mm tall
- Cable channels: 3W x 3D (5mm deep from beam top)
- 12x M2.5 standoff mounting holes (dia 2.7mm thru)
- 4x press-fit tabs: 2W x 6L x 2H for base engagement
- Center beam + 3 transverse beams for rigidity

TOLERANCES:

- Standoff holes: dia 2.7 +0.1/-0mm
- Hole position: +/-0.2mm true position
- Press-fit tabs: +/-0.1mm
- Beam straightness: 0.3mm/100mm
- Overall: +/-0.3mm

Internal Cable Management Frame

Material: PETG (3D printed)

General Tolerances:

Dims: mm

Part No: UDA-007

Scale: 1:1

Linear: +/-0.3mm
Holes: +/-0.2mm

160 x 100 x 10