# Interop QOS

2025-07-23-17-51-45

## Objective

The objective of the QoS (Quality of Service) traffic throughput test is to measure the maximum achievable throughput of a network under specific QoS settings and conditions.By conducting this test, we aim to assess the capacity of network to handle high volumes of traffic while maintaining acceptable performance levels,ensuring that the network meets the required QoS standards and can adequately support the expected user demands.

| | | |
|---|---|---|
| Test Configuration | Device List | DESKTOP-DDPI3HE(Windows) |
| | Number of Stations | Total(1) Windows(1) |
| | AP Model | Test-AP |
| | SSID | None |
| | Traffic Duration in hours | 0.02 |
| | Security | open |
| | Protocol | UDP |
| | Traffic Direction | Download |
| | TOS | ['BK', 'BE', 'VI', 'VO'] |
| | Per TOS Load in Mbps | 1.0 Mbps |

## Overall Download Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

| No of Stations | Throughput for Load 1.0 Mbps-download |
|---|---|
| 1 | BK : 1.0, BE : 1.01, VI: 1.01, VO: 0.99 |

## Overall Download throughput for 1 clients with different TOS.

The below graph represents overall Download throughput for all connected stations running BK, BE, VO, VI traffic with different intended loads1.0 Mbps per tos

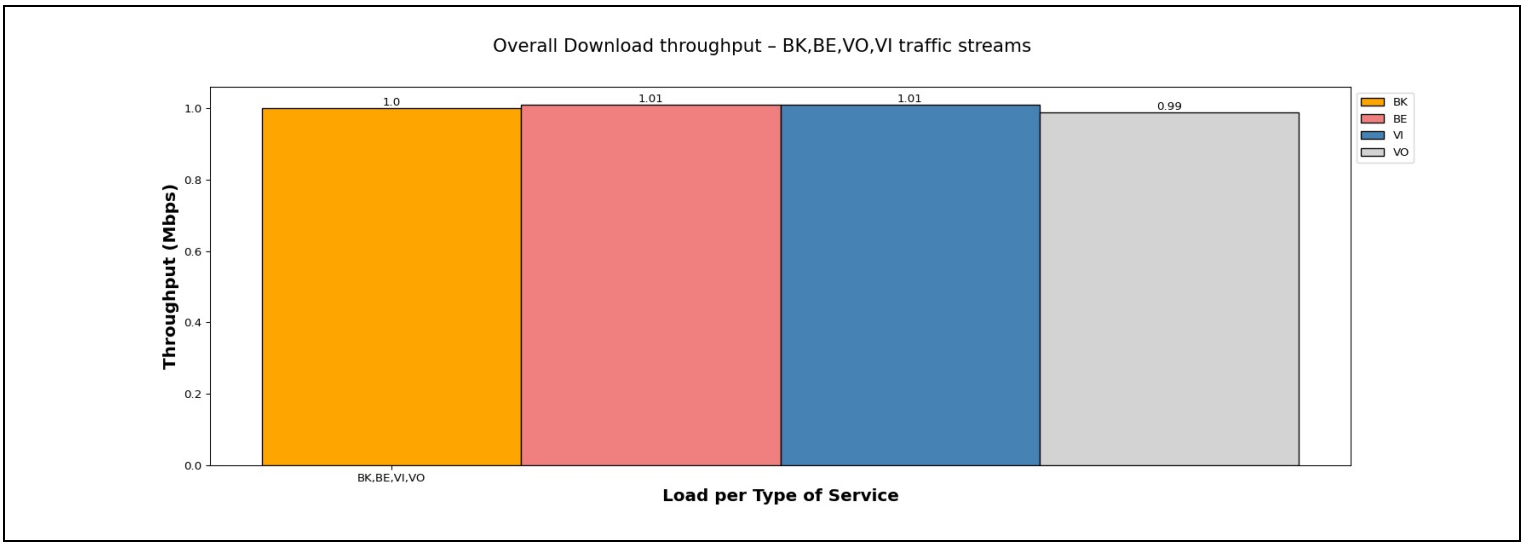


## Individual Download throughput with intended load 1.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 1 clients running BK (WiFi) traffic. X- axis shows “Throughput in Mbps” and Y-axis shows “number of clients”.

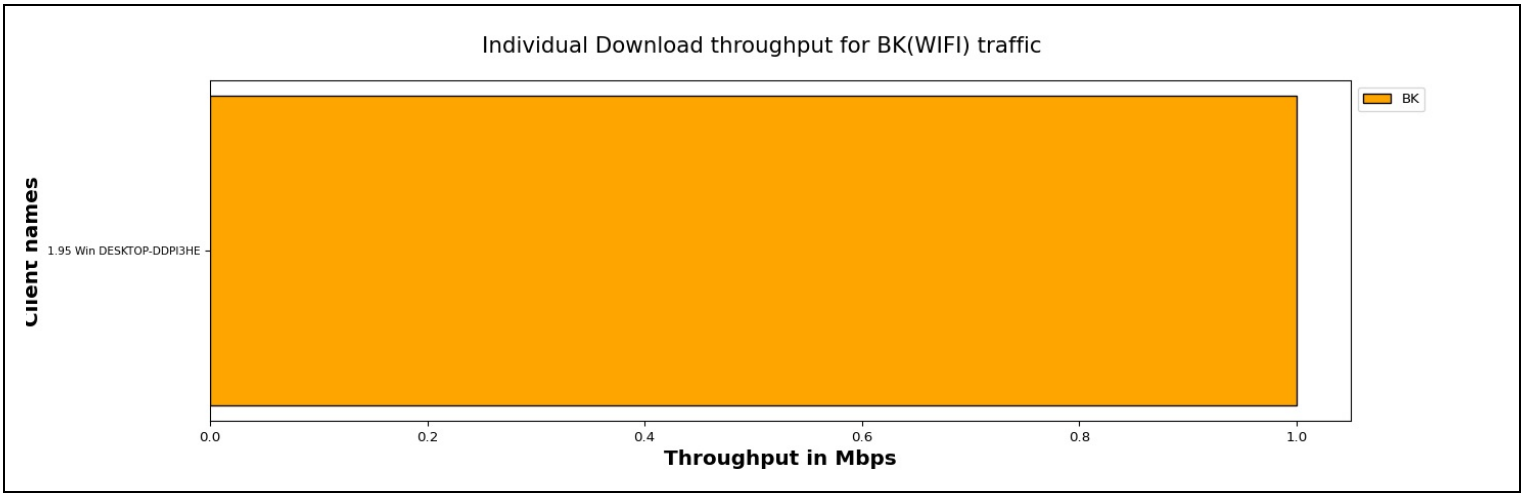


| Client Name | MAC | SSID | Type of traffic | Offered upload rate | Offered download rate | Observed average upload rate | Observed average download rate | Observed Upload Drop (%) | Observed Download Drop (%) |
|---|---|---|---|---|---|---|---|---|---|
| 1.95 Win DESKTOP-DDPI3HE | e4:a4:71:93:70:e7 | NETGEAR_2G_wpa2 | Background | 0.0 Mbps | 1.0 Mbps | 0.0 Mbps | 1.0 Mbps | 0.0 | 0.01 |

## Individual Download throughput with intended load 1.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

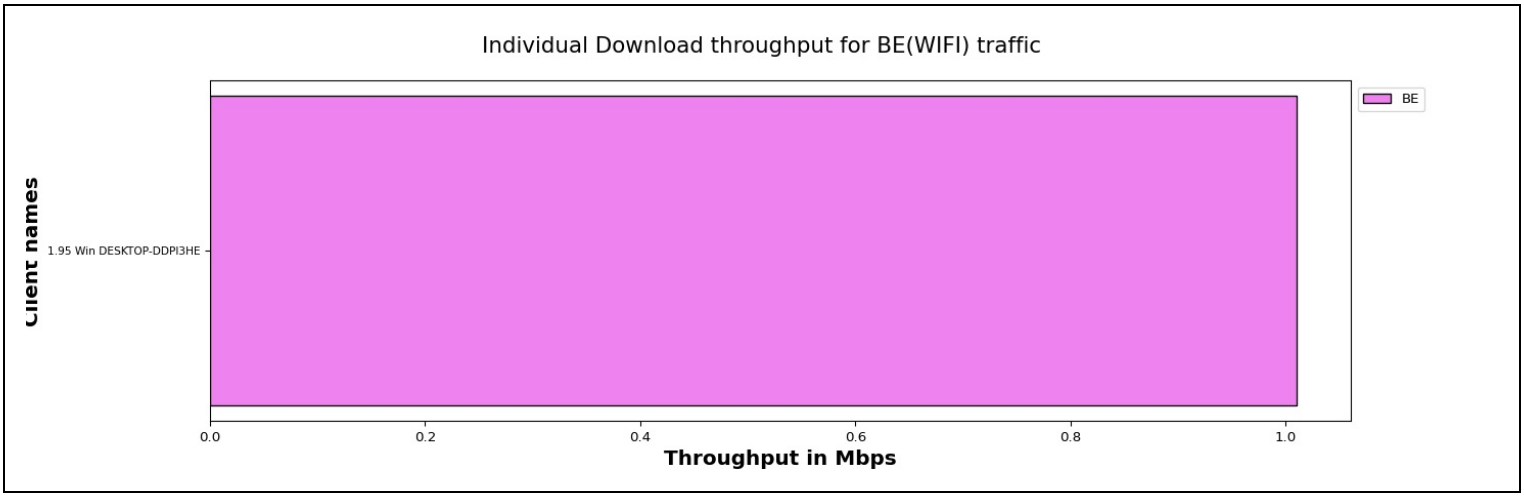


| Client Name | MAC | SSID | Type of traffic | Offered upload rate | Offered download rate | Observed average upload rate | Observed average download rate | Observed Upload Drop (%) | Observed Download Drop (%) |
|---|---|---|---|---|---|---|---|---|---|
| 1.95 Win DESKTOP-DDPI3HE | e4:a4:71:93:70:e7 | NETGEAR_2G_wpa2 | Besteffort | 0.0 Mbps | 1.0 Mbps | 0.0 Mbps | 1.0 Mbps | 0.0 | 0.0 |

## Individual Download throughput with intended load 1.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

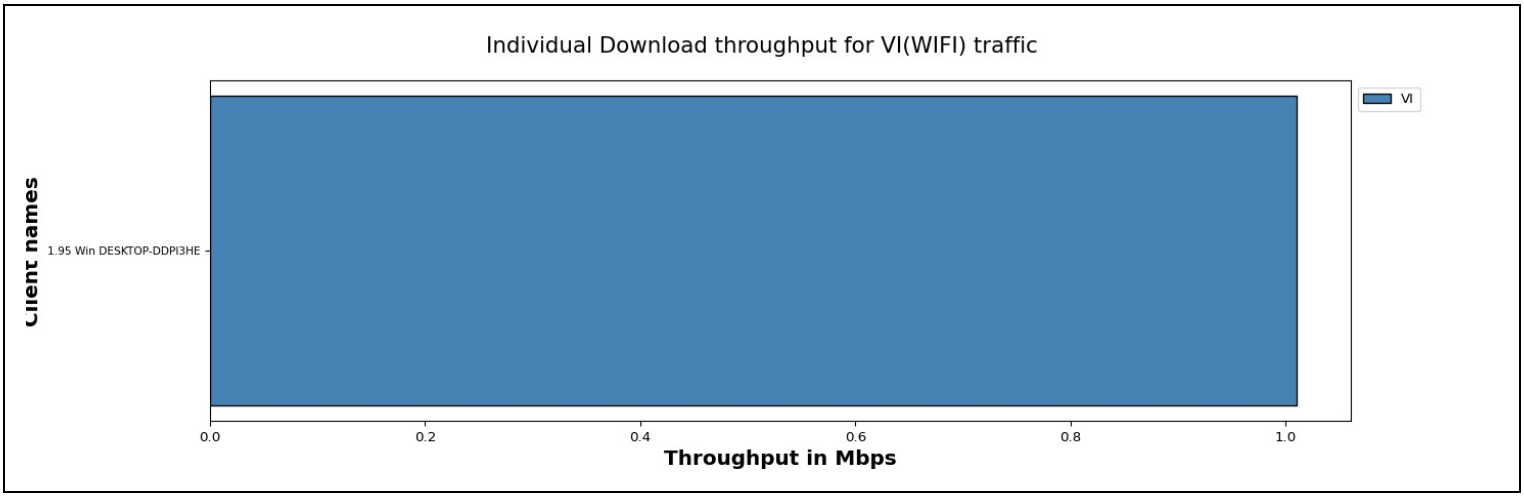


| Client Name | MAC | SSID | Type of traffic | Offered upload rate | Offered download rate | Observed average upload rate | Observed average download rate | Observed Upload Drop (%) | Observed Download Drop (%) |
|---|---|---|---|---|---|---|---|---|---|
| 1.95 Win DESKTOP-DDPI3HE | e4:a4:71:93:70:e7 | NETGEAR_2G_wpa2 | Video | 0.0 Mbps | 1.0 Mbps | 0.0 Mbps | 0.98 Mbps | 0.0 | 0.0 |

## Individual Download throughput with intended load 1.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

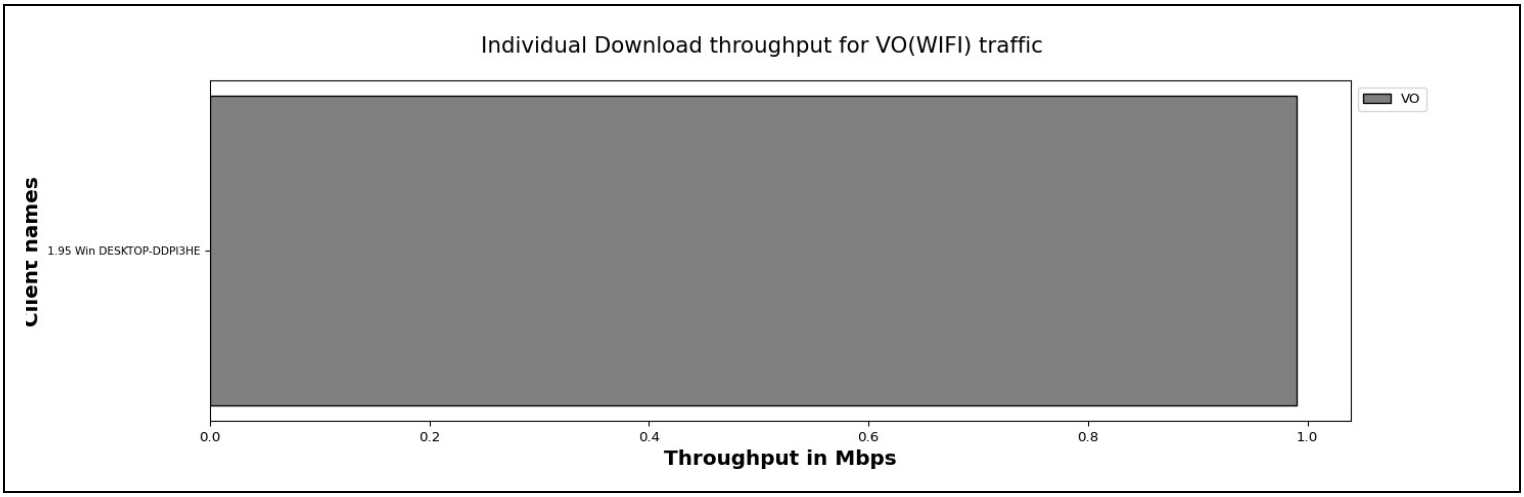


| Client Name | MAC | SSID | Type of traffic | Offered upload rate | Offered download rate | Observed average upload rate | Observed average download rate | Observed Upload Drop (%) | Observed Download Drop (%) |
|---|---|---|---|---|---|---|---|---|---|
| 1.95 Win DESKTOP-DDPI3HE | e4:a4:71:93:70:e7 | NETGEAR_2G_wpa2 | Voice | 0.0 Mbps | 1.0 Mbps | 0.0 Mbps | 0.93 Mbps | 0.0 | 0.0 |

| Information | contact | support@candelatech.com |
|---|---|---|