Candela Base Class

2025-09-25 11:32:34.582220

Parallel Tests

Traffic Details

s/no	test_name	Duration	status

QOS Test

Test Configuration	Device List	DESKTOP-IUQFRCV(Windows), DESKTOP-F0HLI17(Windows), DESKTOP-LFAH9C0(Windows), DESKTOP-3KOIAJR(Windows), DESKTOP-BLNNVU5(Windows), mackbooir02sAir.ctinb.candelate(Mac), hp80-HP-ProBook-445R-G6(Linux)
	Number of Stations	Total(7) Windows(5) Linux(1) Mac(1)
	AP Model	Test-AP
	SSID	None
	Traffic Duration in hours	0.02
	Security	open
	Protocol	TCP
	Traffic Direction	Download
	TOS	['VO', 'VI', 'BE', 'BK']
	Per TOS Load in Mbps	10.0 Mbps

Overall Download Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

No of Stations	Throughput for Load 10.0 Mbps-download
7	BK : 46.19, BE : 56.78, VI: 61.93, VO: 60.45

Overall Download throughput for 7 clients with different TOS.

The below graph represents overall Download throughput for all connected stations running BK, BE, VO, VI traffic with different intended loads10.0 Mbps per tos

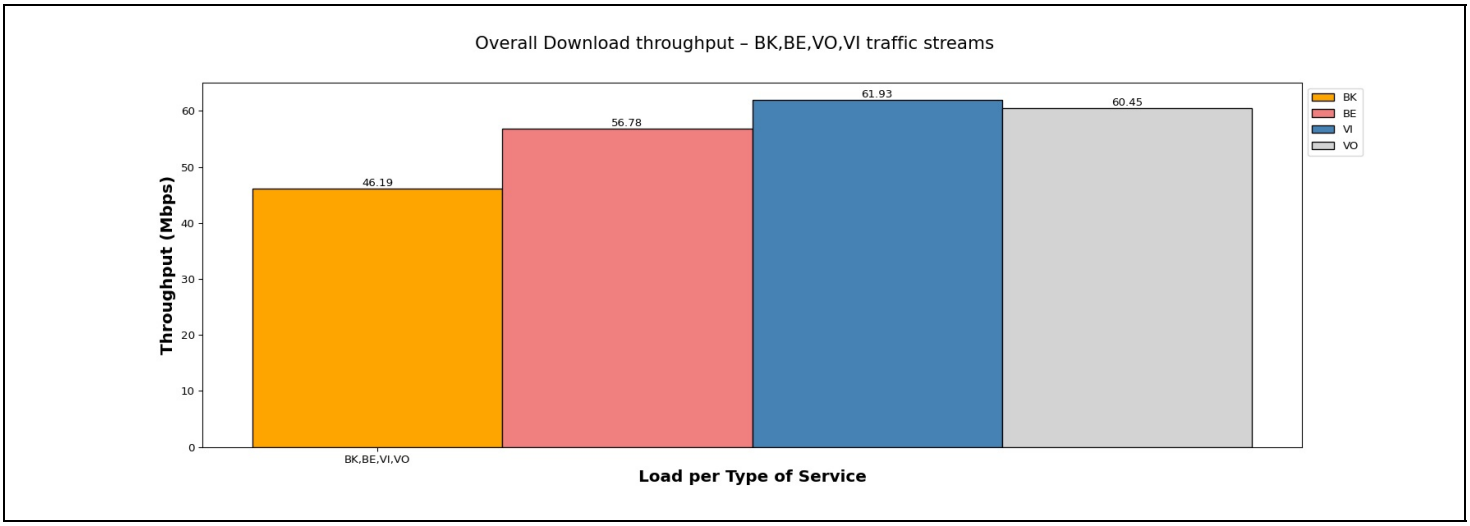

Individual Download throughput with intended load 10.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 7 clients running BK (WiFi) traffic. X- axis shows "Throughput in Mbps" and Y-axis shows "number of clients".

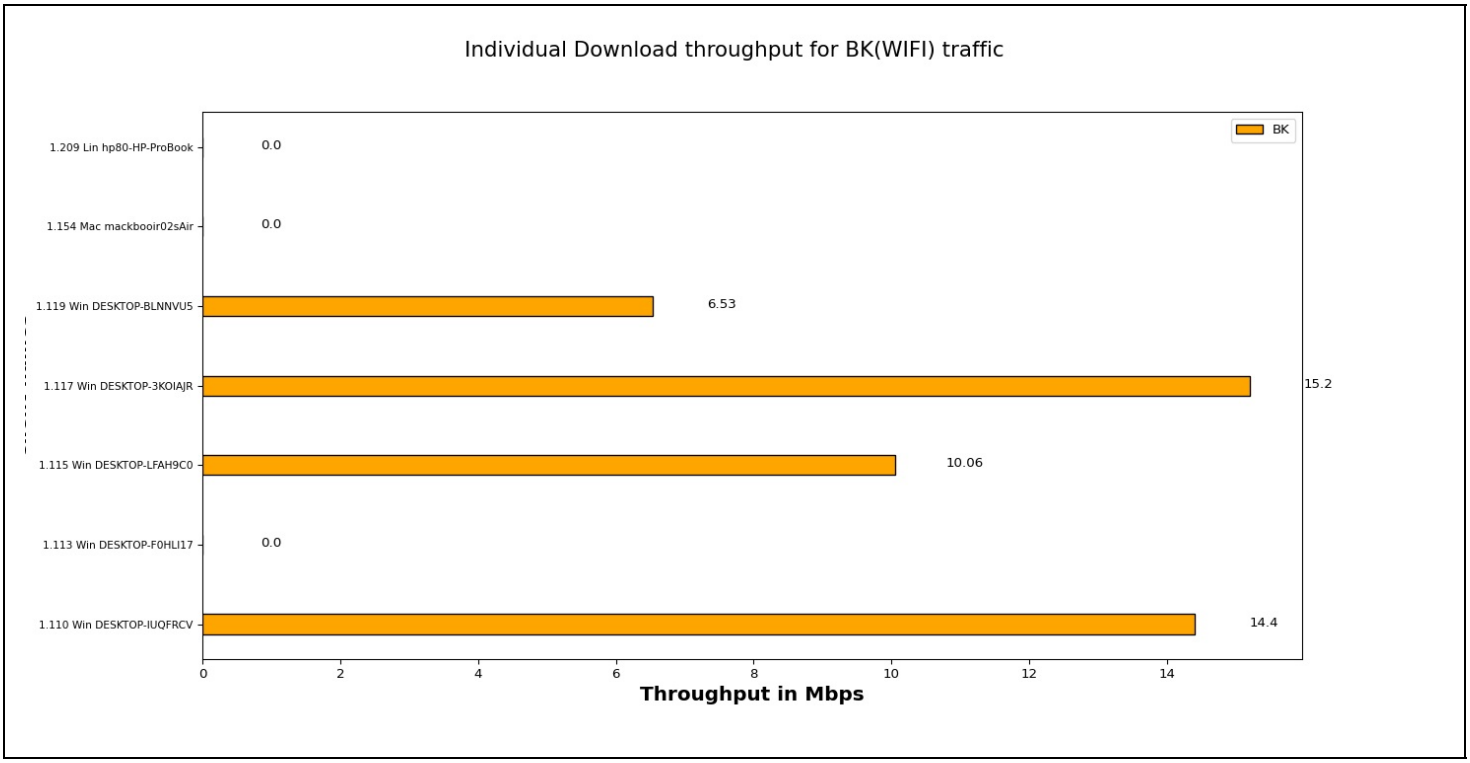

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.110 Win DESKTOP-IUQFRCV	24:ee:9a:39:2e:6		Background	0.0 Mbps	10.0 Mbps	0.0 Mbps	2.73 Mbps	0.0	4.98
1.113 Win DESKTOP-F0HLI17	00:bb:60:0b:5a:fe	OpenWifi_psk2	Background	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.0 Mbps	0.0	0.00
1.115 Win DESKTOP-LFAH9C0	34:f3:9a:eb:46:b4	OpenWifi_psk2	Background	0.0 Mbps	10.0 Mbps	0.0 Mbps	3.71 Mbps	0.0	0.00
1.117 Win DESKTOP-3KOIAJR	f4:8c:50:e2:01:6	OpenWifi_psk2	Background	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.4 Mbps	0.0	3.49
1.119 Win DESKTOP-BLNNVU5	34:41:5d:51:d1:96	OpenWifi_psk2	Background	0.0 Mbps	10.0 Mbps	0.0 Mbps	3.2 Mbps	0.0	29.18
1.154 Mac mackbooir02sAir.ctinb.candelate	8:bf:6b:d4:60:5a	OpenWifi_psk2	Background	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.0 Mbps	0.0	0.00
1.209 Lin hp80-HP-ProBook-445R-G6	8:cd:c4:de:d3:bb	OpenWifi_psk2	Background	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.0 Mbps	0.0	0.00

Individual Download throughput with intended load 10.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 7 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

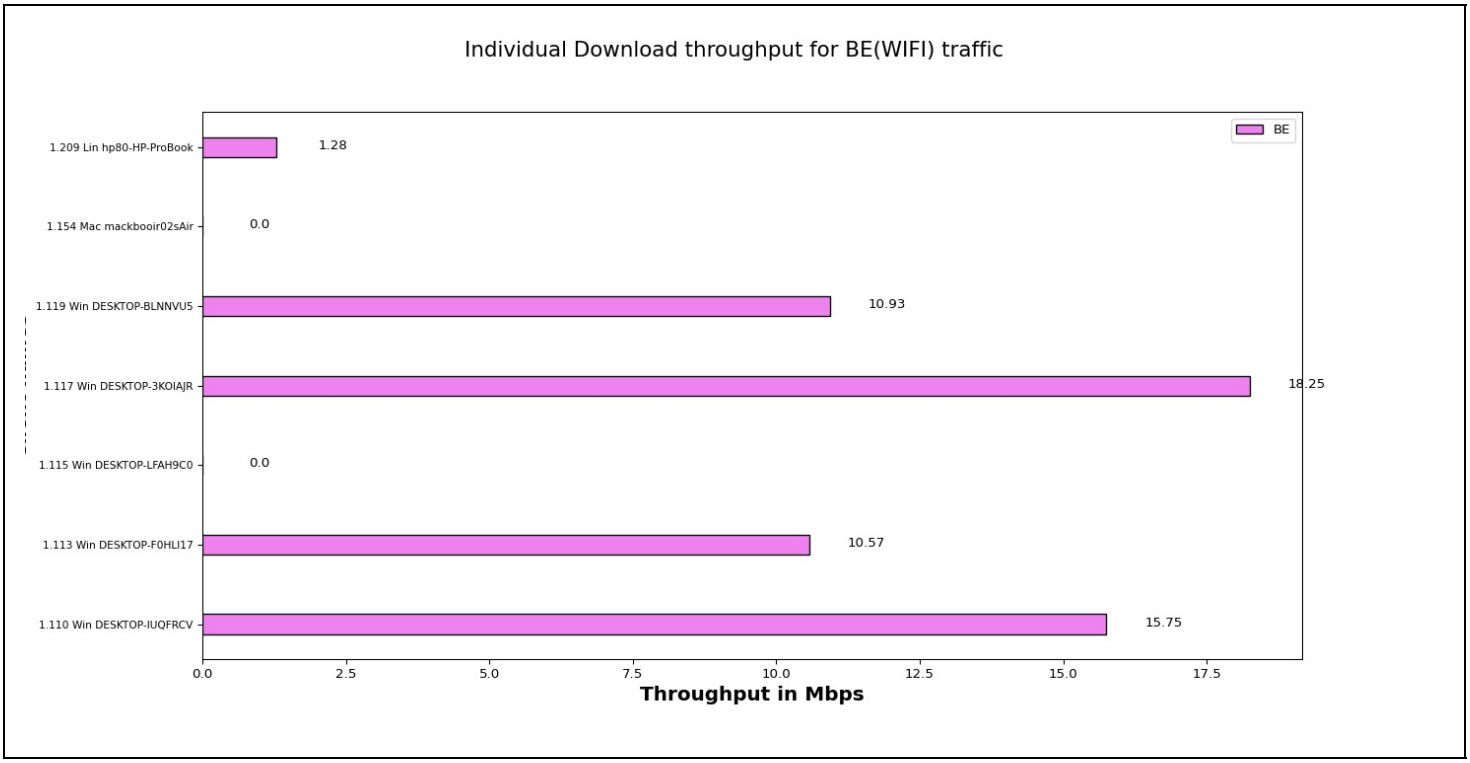

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.110 Win DESKTOP-IUQFRCV	24:ee:9a:39:2e:6		Besteffort	0.0 Mbps	10.0 Mbps	0.0 Mbps	4.3 Mbps	0.0	14.47
1.113 Win DESKTOP-F0HLI17	00:bb:60:0b:5a:fe	OpenWifi_psk2	Besteffort	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.67 Mbps	0.0	1.29
1.115 Win DESKTOP-LFAH9C0	34:f3:9a:eb:46:b4	OpenWifi_psk2	Besteffort	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.1 Mbps	0.0	43.06
1.117 Win DESKTOP-3KOIAJR	f4:8c:50:e2:01:6	OpenWifi_psk2	Besteffort	0.0 Mbps	10.0 Mbps	0.0 Mbps	6.23 Mbps	0.0	6.07
1.119 Win DESKTOP-BLNNVU5	34:41:5d:51:d1:96	OpenWifi_psk2	Besteffort	0.0 Mbps	10.0 Mbps	0.0 Mbps	6.7 Mbps	0.0	1.73
1.154 Mac mackbooir02sAir.ctinb.candelate	8:bf:6b:d4:60:5a	OpenWifi_psk2	Besteffort	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.5 Mbps	0.0	7.94
1.209 Lin hp80-HP-ProBook-445R-G6	8:cd:c4:de:d3:bb	OpenWifi_psk2	Besteffort	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.32 Mbps	0.0	17.13

Individual Download throughput with intended load 10.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 7 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

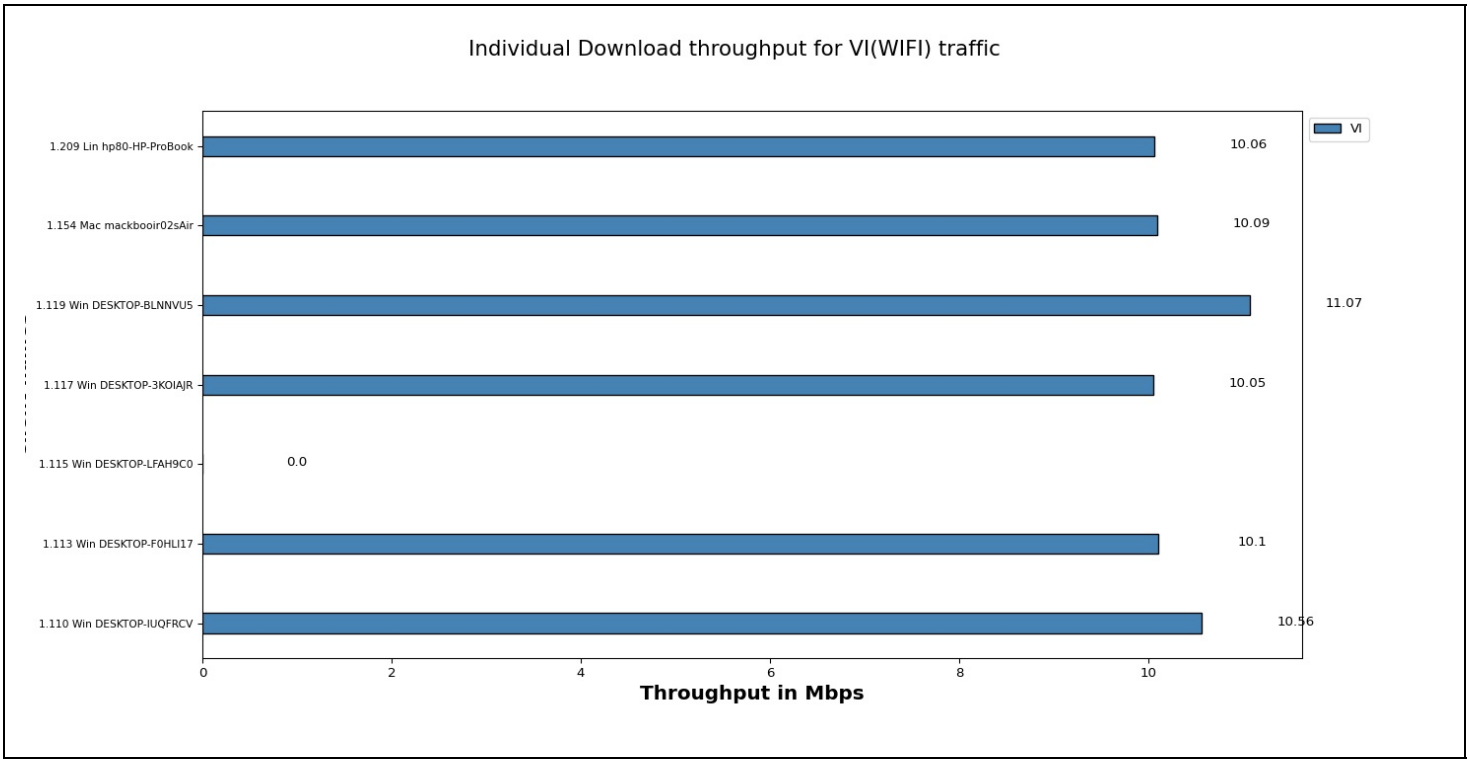

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.110 Win DESKTOP-IUQFRCV	24:ee:9a:39:2e:6		Video	0.0 Mbps	10.0 Mbps	0.0 Mbps	7.91 Mbps	0.0	0.61
1.113 Win DESKTOP-F0HLI17	00:bb:60:0b:5a:fe	OpenWifi_psk2	Video	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.5 Mbps	0.0	0.18
1.115 Win DESKTOP-LFAH9C0	34:f3:9a:eb:46:b4	OpenWifi_psk2	Video	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.04 Mbps	0.0	18.00
1.117 Win DESKTOP-3KOIAJR	f4:8c:50:e2:01:6	OpenWifi_psk2	Video	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.8 Mbps	0.0	0.47
1.119 Win DESKTOP-BLNNVU5	34:41:5d:51:d1:96	OpenWifi_psk2	Video	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.83 Mbps	0.0	0.29
1.154 Mac mackbooir02sAir.ctinb.candelate	8:bf:6b:d4:60:5a	OpenWifi_psk2	Video	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.78 Mbps	0.0	0.18
1.209 Lin hp80-HP-ProBook-445R-G6	8:cd:c4:de:d3:bb	OpenWifi_psk2	Video	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.69 Mbps	0.0	0.08

Individual Download throughput with intended load 10.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 7 clients running VO (WiFi) traffic. X- axis shows “number of clients” and Y-axis shows “Throughput in Mbps”.

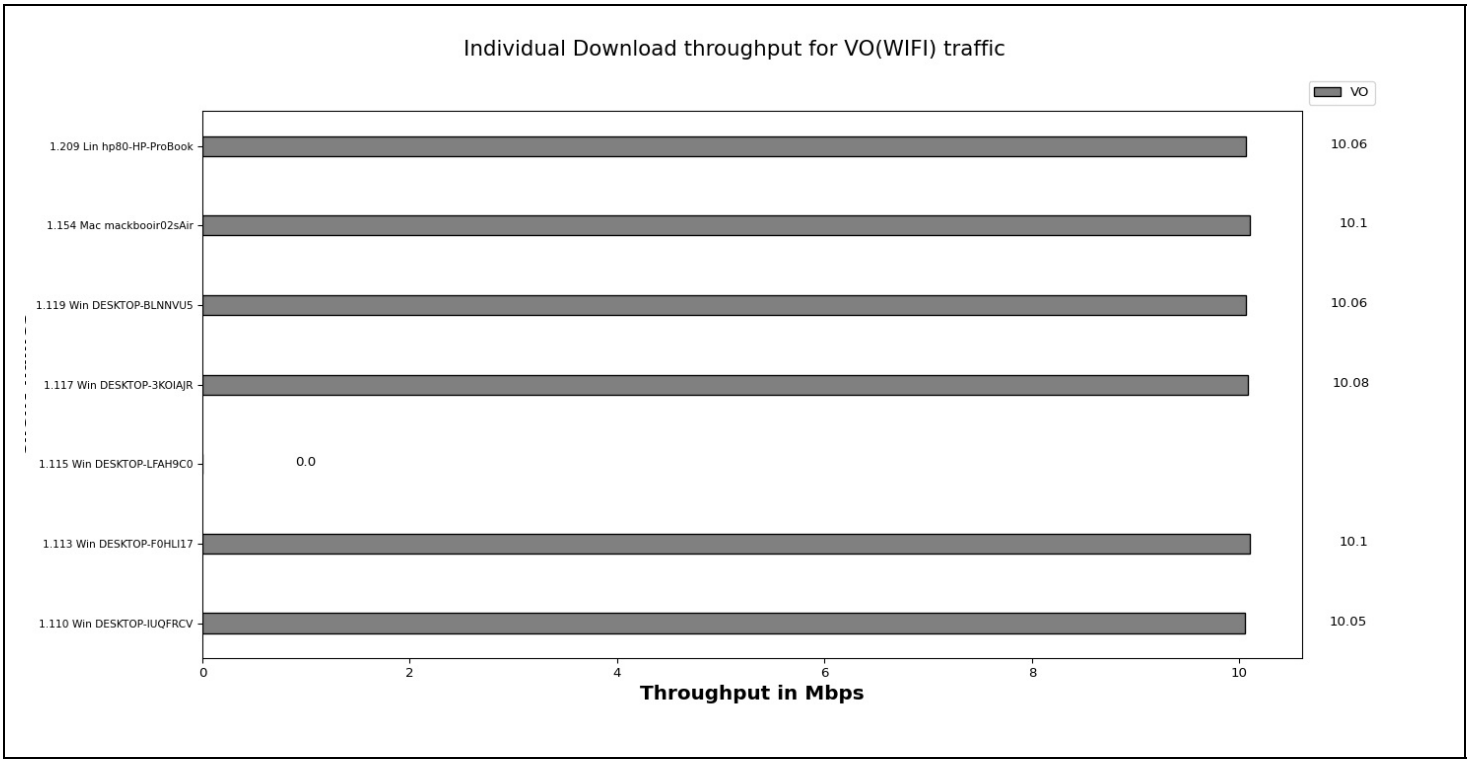

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.110 Win DESKTOP-IUQFRCV	24:ee:9a:39:2e:6		Voice	0.0 Mbps	10.0 Mbps	0.0 Mbps	10.05 Mbps	0.0	0.13
1.113 Win DESKTOP-F0HLI17	00:bb:60:0b:5a:fe	OpenWifi_psk2	Voice	0.0 Mbps	10.0 Mbps	0.0 Mbps	10.0 Mbps	0.0	0.10
1.115 Win DESKTOP-LFAH9C0	34:f3:9a:eb:46:b4	OpenWifi_psk2	Voice	0.0 Mbps	10.0 Mbps	0.0 Mbps	0.07 Mbps	0.0	14.77
1.117 Win DESKTOP-3KOIAJR	f4:8c:50:e2:01:6	OpenWifi_psk2	Voice	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.44 Mbps	0.0	0.20
1.119 Win DESKTOP-BLNNVU5	34:41:5d:51:d1:96	OpenWifi_psk2	Voice	0.0 Mbps	10.0 Mbps	0.0 Mbps	9.16 Mbps	0.0	0.00
1.154 Mac mackbooir02sAir.ctinb.candelate	8:bf:6b:d4:60:5a	OpenWifi_psk2	Voice	0.0 Mbps	10.0 Mbps	0.0 Mbps	8.79 Mbps	0.0	0.15
1.209 Lin hp80-HP-ProBook-445R-G6	8:cd:c4:de:d3:bb	OpenWifi_psk2	Voice	0.0 Mbps	10.0 Mbps	0.0 Mbps	8.29 Mbps	0.0	0.02

Information	contact	support@candelatech.com