Candela Base Class

2025-09-25 11:58:13.122559

Parallel Tests

Traffic Details

s/no	test_name	Duration	status

MULTICAST Test

Device Under Test Information

Device Under Test	DUT Name	
	DUT Hardware Version	
	DUT Software Version	
	DUT Serial Number	

Test Configuration

Test Configuration	LANforge ip	192.168.242.2
	LANforge port	8080
	Upstream	eth2
	Test Duration	1m
	Polling Interval	5s
	Total No. of Devices	7

Radio Configuration

Individual throughput mcast download bps: 10000000 traffic VO (WiFi).

The below graph represents individual throughput for 7 clients running VO (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

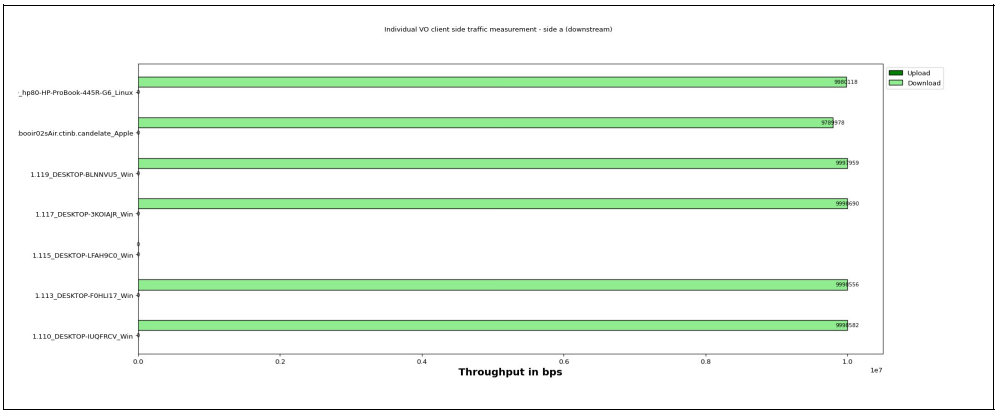

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Up R F Cl
1.110_DESKTOP-IUQFRCV_Win	1.110	DESKTOP-IUQFRCV	Win/x86 6.2	MLT-mrx-VO-wlan0-1	1.110.wlan0	AUTO 20	24:ee:9a:39:2e:61		0	VO	Mcast	0	10000000	0
1.113_DESKTOP-F0HLI17_Win	1.113	DESKTOP-F0HLI17	Win/x86 6.2	MLT-mrx-VO-wlan0-2	1.113.wlan0	802.11abgn-AC 20 1x1	00:bb:60:0b:5a:fe	OpenWifi_psk2	36	VO	Mcast	0	10000000	0
1.115_DESKTOP-LFAH9C0_Win	1.115	DESKTOP-LFAH9C0	Win/x86 6.2	MLT-mrx-VO-wlan0-3	1.115.wlan0	802.11abgn-AC 20 1x1	34:f3:9a:eb:46:b4	OpenWifi_psk2	36	VO	Mcast	0	10000000	0
1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	Win/x86 6.2	MLT-mrx-VO-wlan0-4	1.117.wlan0	802.11abgn 20 1x1	f4:8c:50:e2:01:67	OpenWifi_psk2	1	VO	Mcast	0	10000000	0
1.119_DESKTOP-BLNNVU5_Win	1.119	DESKTOP-BLNNVU5	Win/x86 6.2	MLT-mrx-VO-wlan0-5	1.119.wlan0	802.11abgn-AC 20 1x1	34:41:5d:51:d1:96	OpenWifi_psk2	36	VO	Mcast	0	10000000	0
			Apple/x86-	MLT-mrx-		802.11abg								

1.154_mackbooir02sAir.ctinb.candelate_Apple	1.154	mackbooir02sAir.ctinb.candelate	64	VO-en0-6	1.154.en0	80 2x2	48:bf:6b:d4:60:5a	OpenWifi_psk2	36	VO	Mcast	0	10000000	0
1.209_hp80-HP-ProBook-445R-G6_Linux	1.209	hp80-HP-ProBook-445R-G6	Linux/x86-64	MLT-mrx-VO-wlan0-7	1.209.wlan0	802.11an-AC 80 2x2	28:cd:c4:de:d3:bb	OpenWifi_psk2	36	VO	Mcast	0	10000000	0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 10000000 /station for traffic VO (WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

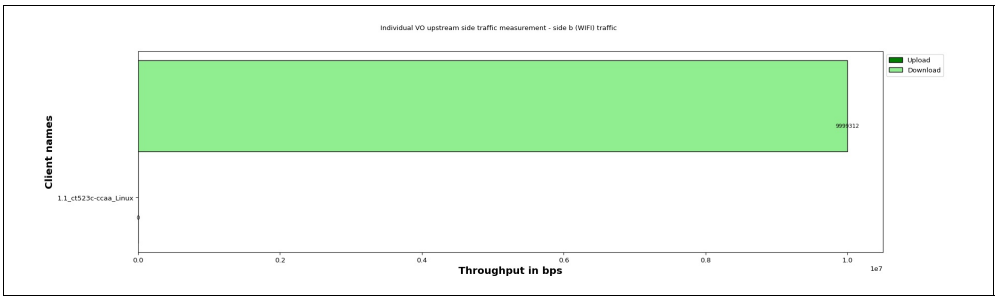

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	MLT-mtx-VO-eth2-0	1.1.eth2		9c:69:b4:63:72:ce		[channel: 2]	VO	Mcast	0	10000000	0	9999312	0.0

Layer 3 Cx Traffic Last Reporting Interval eth2

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	eth2	144657	9170142	2.5 Gbps	2.5 Gbps	NaN	NaN	NaN	9c:69:b4:63:72:ce	[channel: 2]

Layer 3 Cx Traffic Last Reporting Interval 1.110.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	1.110.wlan0	279474412	275586161	0 bps	NaN	NaN	NaN	AUTO 20	24:ee:9a:39:2e:61

Layer 3 Cx Traffic Last Reporting Interval 1.113.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	1.113.wlan0	314280977	308935501	650 Mbps	650 Mbps	-33 dBm	92:3C:B3:6C:43:41	802.11abgn-AC 20 1x1

Layer 3 Cx Traffic Last Reporting Interval 1.115.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	1.115.wlan0	435359490	427992418	433.3 Mbps	433 Mbps	-43 dBm	92:3C:B3:6C:43:41	802.11abgn-AC 20 1x1

Layer 3 Cx Traffic Last Reporting Interval 1.117.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	1.117.wlan0	479273043	471231249	300 Mbps	300 Mbps	-21 dBm	92:3C:B3:6C:43:40	802.11abgn 20 1x1

Layer 3 Cx Traffic Last Reporting Interval 1.119.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	M
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	1.119.wlan0	9310651	4594	780 Mbps	780 Mbps	-36 dBm	92:3C:B3:6C:43:41	802.11abgn-AC 20 1x1	34:41:5

Layer 3 Cx Traffic Last Reporting Interval 1.154.en0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	1.154.en0	3715549	1407	304.2 Mbps	527 Mbps	-41 dBm	92:3C:B3:6C:43:41	802.11abg 80 2x2	48:bf:6b:d4

Layer 3 Cx Traffic Last Reporting Interval 1.209.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC
1758781676	09_25_2025_11_57_56	14	0	0	10000000	10000000	MTU	MTU	MTU	MTU	-1	1.209.wlan0	6830103	18	86.7 Mbps	650 Mbps	-13 dBm	92:3C:B3:6C:43:41	802.11an-AC 80 2x2	28:cd:c4:d