Interop QOS

2025-10-28-13-47-37

Objective

The objective of the QoS (Quality of Service) traffic throughput test is to measure the maximum achievable throughput of a network under specific QoS settings and conditions.By conducting this test, we aim to assess the capacity of network to handle high volumes of traffic while maintaining acceptable performance levels,ensuring that the network meets the required QoS standards and can adequately support the expected user demands.

Test Configuration	AP Model	Cisco
	Configuration	Groups: -> Profiles:
	Traffic Duration in hours	0.02
	Security	wpa2
	Protocol	UDP
	Traffic Direction	Upload
	TOS	['BK', 'BE', 'VI', 'VO']
	Per TOS Load in Mbps	1.0 Mbps

Coordinate: 2 | Rotation Angle: 60°

Overall Upload Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

No of Stations	Throughput for Load 1.0 Mbps-upload
1	BK : 1.0, BE : 1.0, VI: 1.0, VO: 1.01

Overall Upload throughput for 1 clients with different TOS.

The below graph represents overall Upload throughput for all connected stations running BK, BE, VO, VI traffic with different intended loads1.0 Mbps per tos

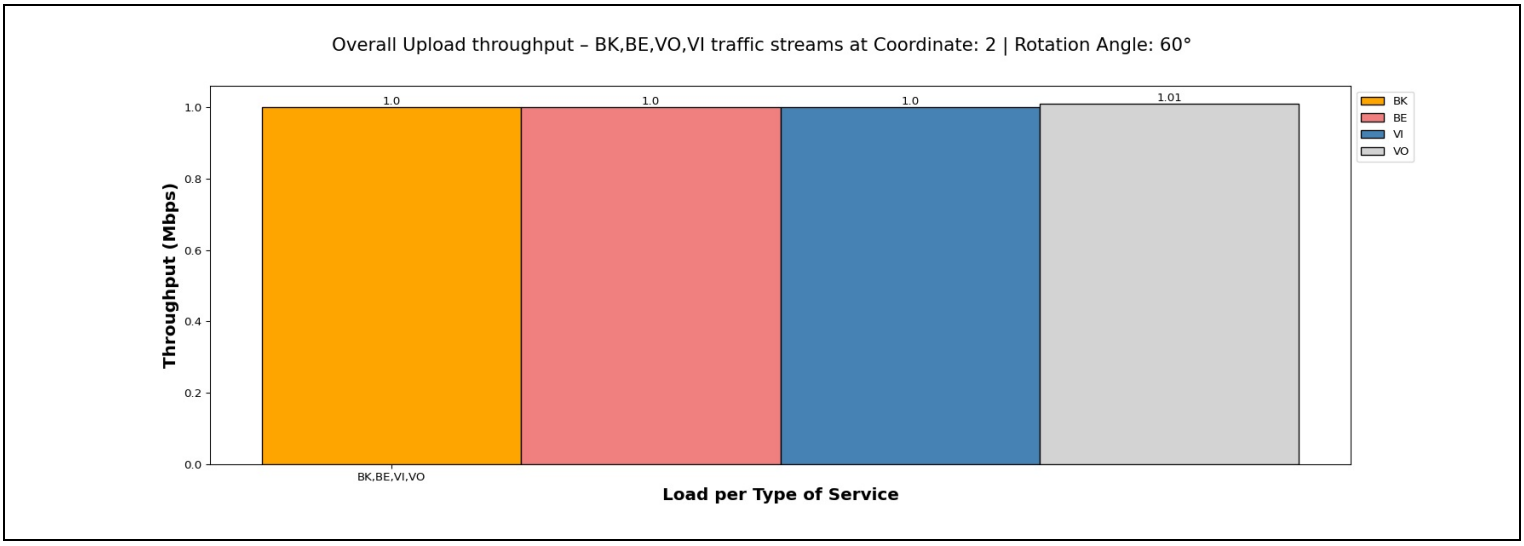

Individual Upload throughput with intended load 1.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 1 clients running BK (WiFi) traffic. X- axis shows “Throughput in Mbps” and Y-axis shows “number of clients”.

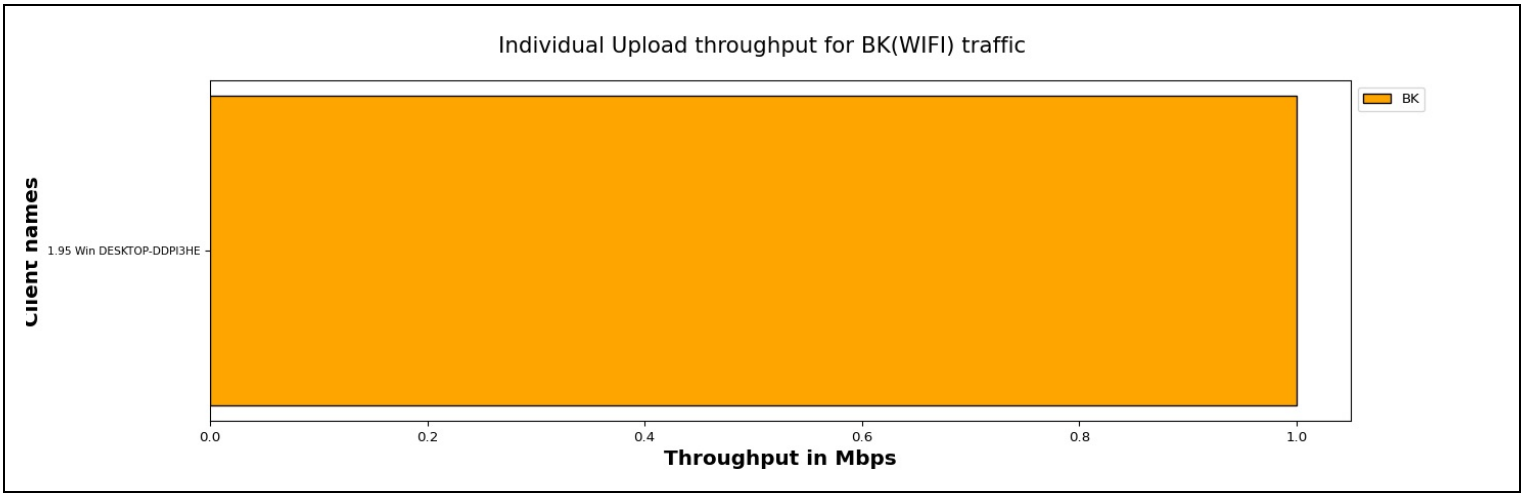

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Background	1.0 Mbps	0.0 Mbps	0.77 Mbps	0.0 Mbps	0.0	0.0

Individual Upload throughput with intended load 1.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

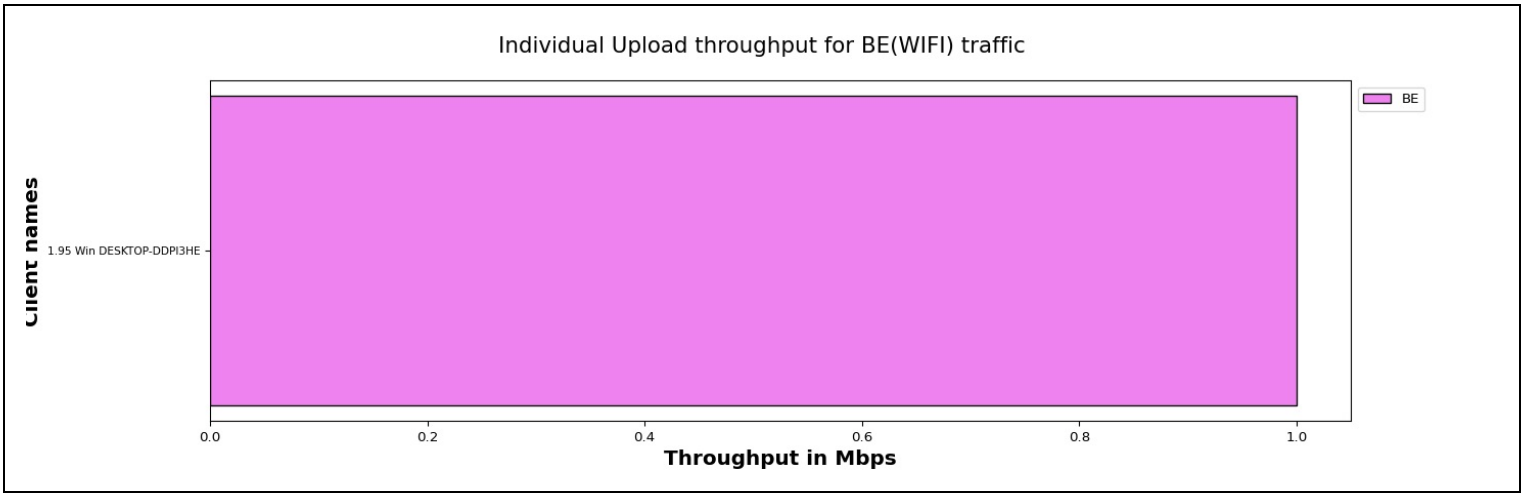

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Besteffort	1.0 Mbps	0.0 Mbps	0.77 Mbps	0.0 Mbps	0.0	0.0

Individual Upload throughput with intended load 1.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

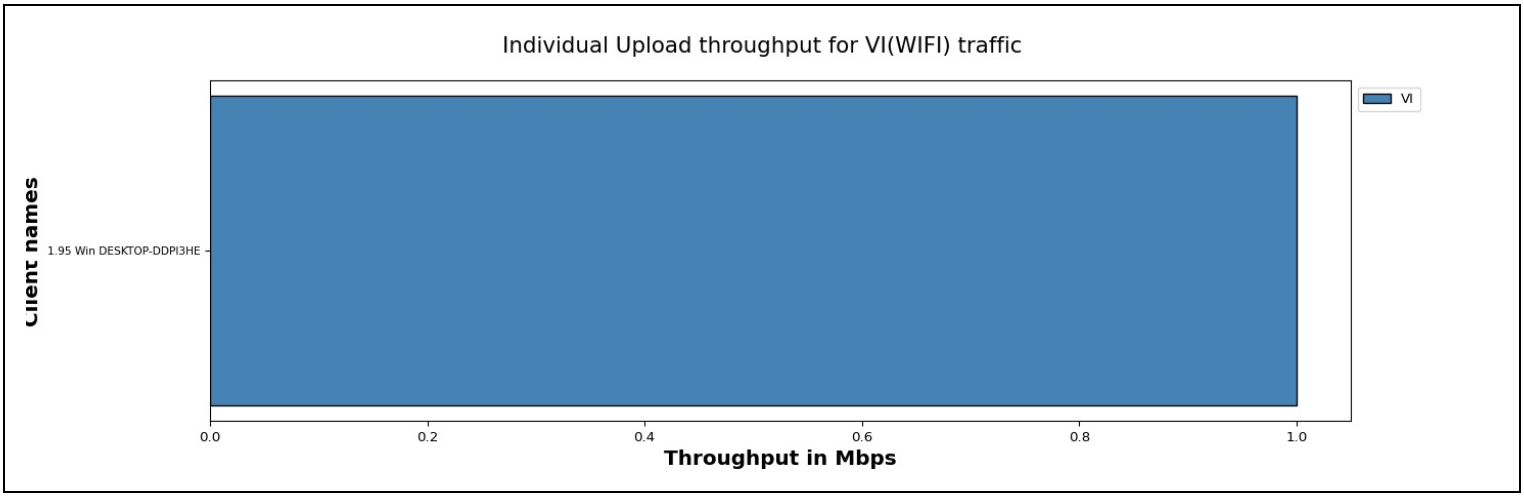

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Video	1.0 Mbps	0.0 Mbps	0.77 Mbps	0.0 Mbps	0.0	0.0

Individual Upload throughput with intended load 1.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

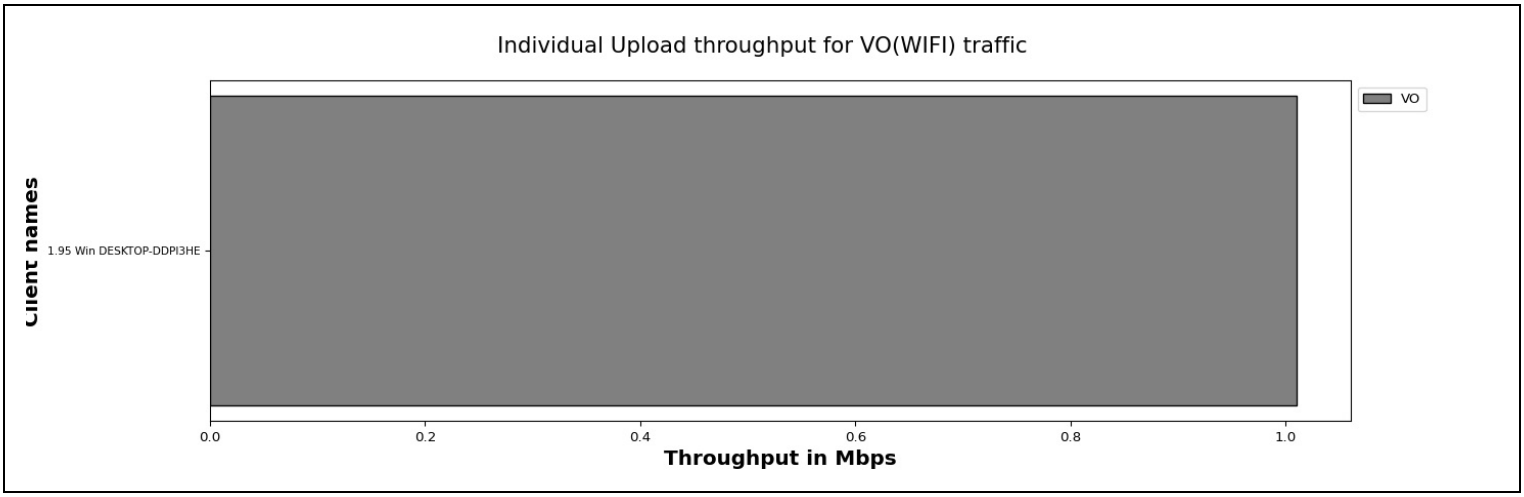

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Voice	1.0 Mbps	0.0 Mbps	0.77 Mbps	0.0 Mbps	0.0	0.0

Coordinate: 4 | Rotation Angle: 60°

Overall Upload Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

No of Stations	Throughput for Load 1.0 Mbps-upload
1	BK : 1.0, BE : 1.01, VI: 1.0, VO: 0.99

Overall Upload throughput for 1 clients with different TOS.

The below graph represents overall Upload throughput for all connected stations running BK, BE, VO, VI traffic with different intended loads1.0 Mbps per tos

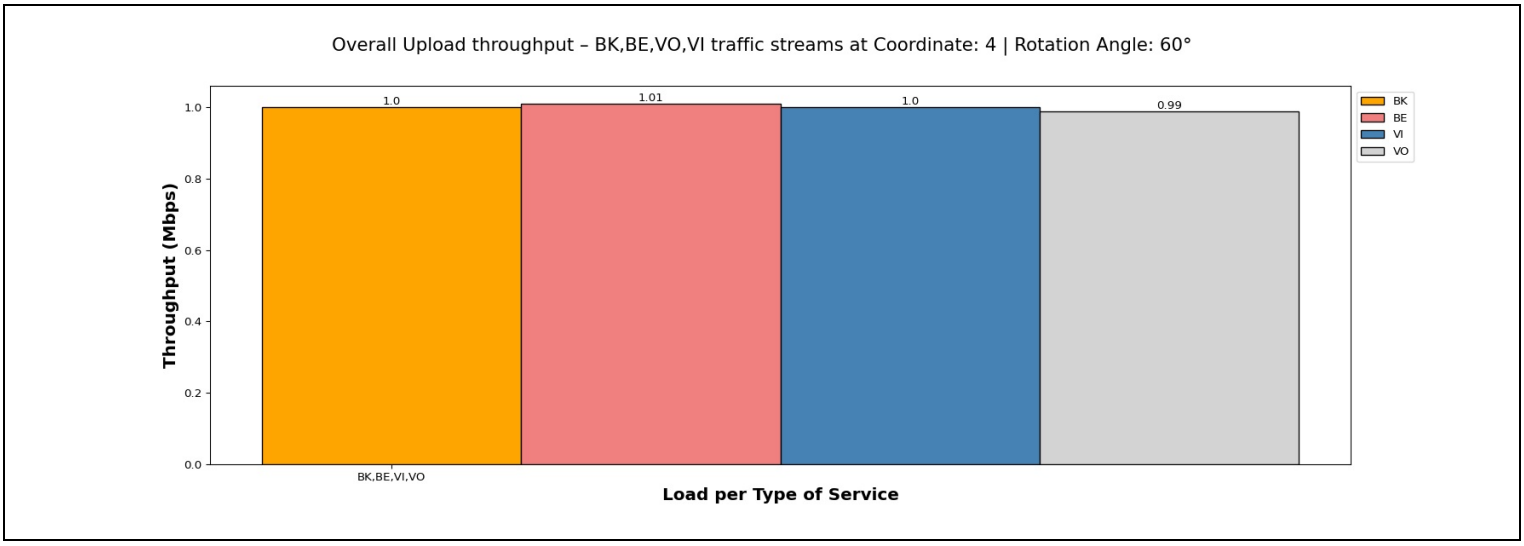

Individual Upload throughput with intended load 1.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 1 clients running BK (WiFi) traffic. X- axis shows "Throughput in Mbps" and Y-axis shows "number of clients".

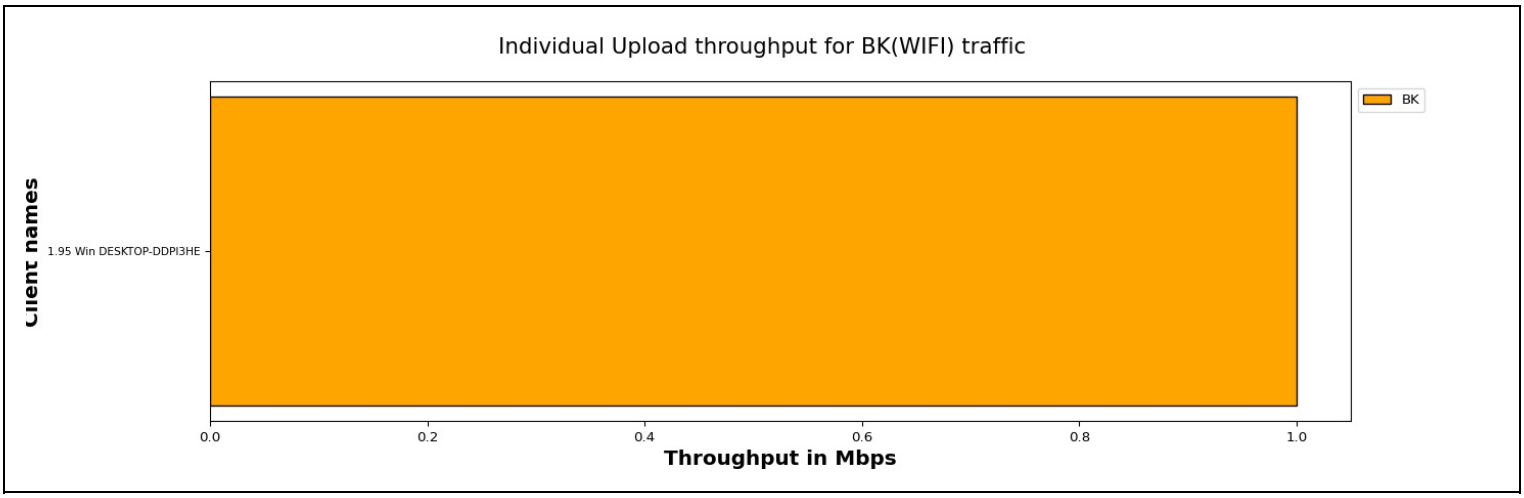

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Background	1.0 Mbps	0.0 Mbps	1.0 Mbps	0.0 Mbps	0.0	0.0

Individual Upload throughput with intended load 1.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

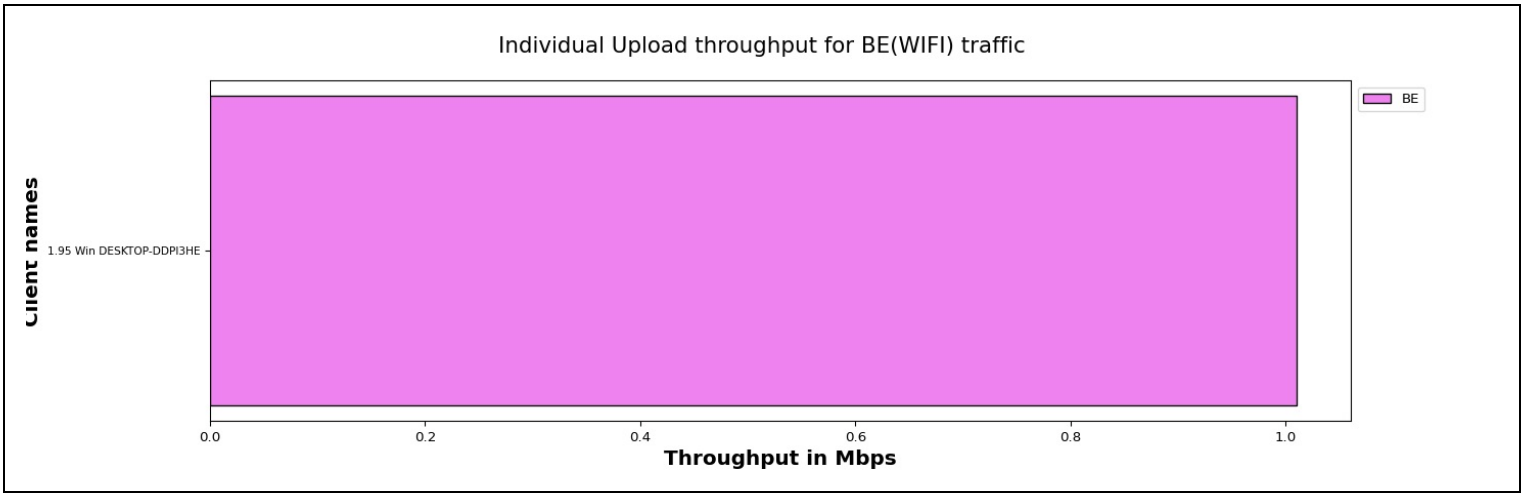

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Besteffort	1.0 Mbps	0.0 Mbps	1.0 Mbps	0.0 Mbps	0.0	0.0

Individual Upload throughput with intended load 1.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

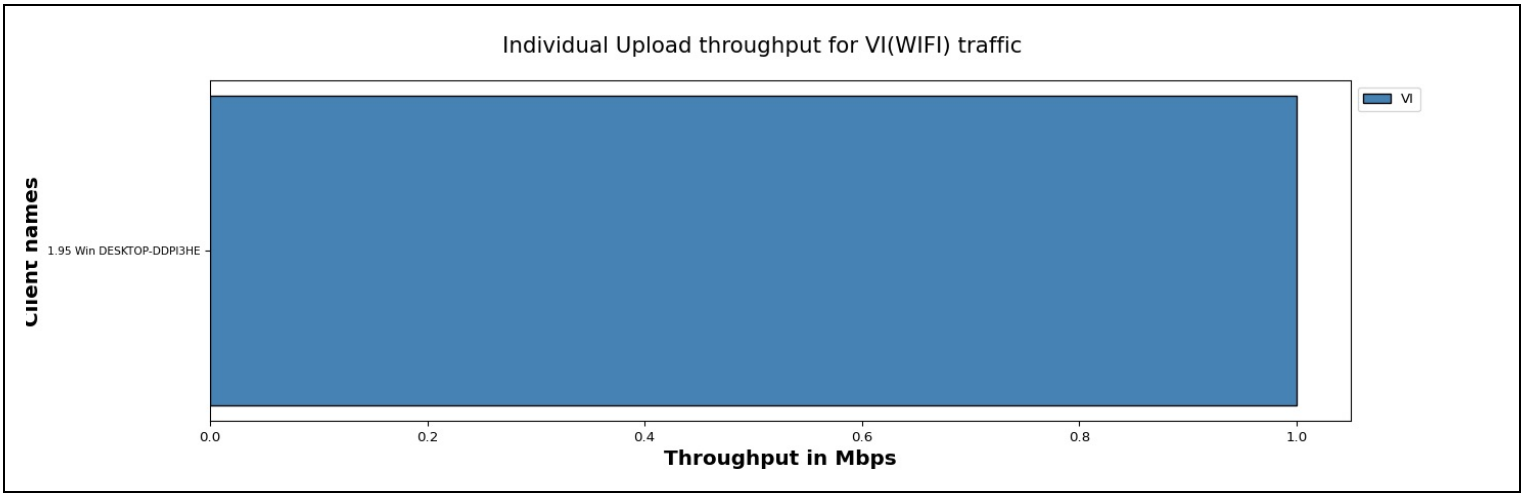

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Video	1.0 Mbps	0.0 Mbps	1.0 Mbps	0.0 Mbps	0.0	0.0

Individual Upload throughput with intended load 1.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

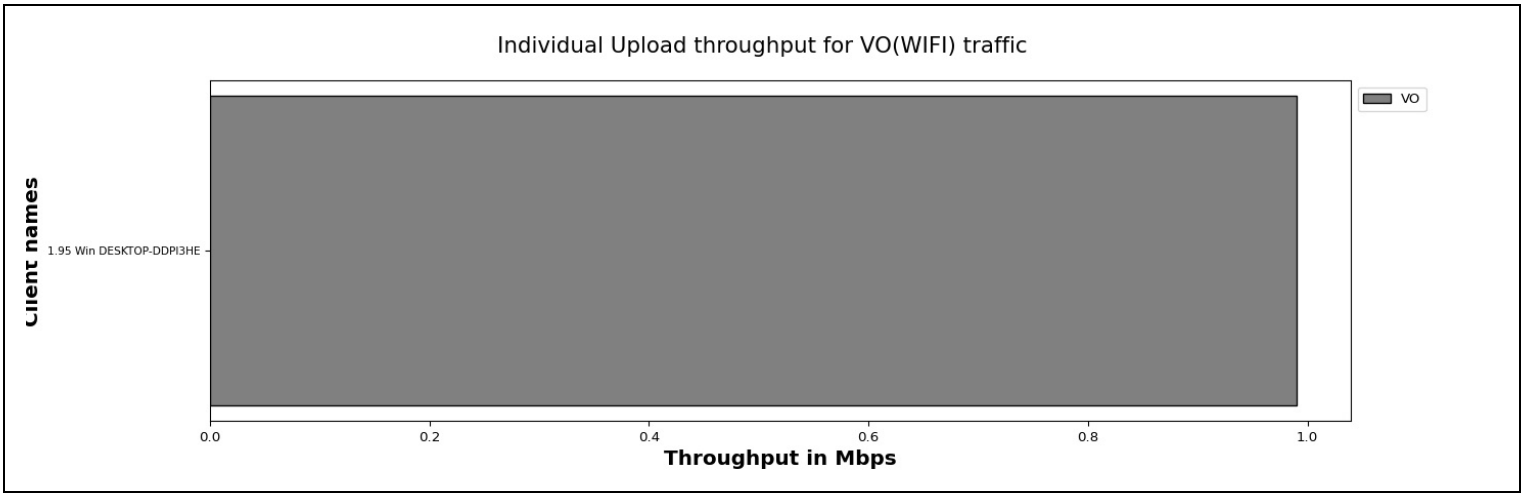

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.95 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Voice	1.0 Mbps	0.0 Mbps	1.0 Mbps	0.0 Mbps	0.0	0.0

Information	contact	support@candelatech.com