Multicast Test

2025-10-14-13-20-23

Objective

The Layer 3 Traffic Generation Test is designed to test the performance of the Access Point by running layer 3 Cross-Connect Traffic. Layer-3 Cross-Connects represent a stream of data flowing through the system under test. A Cross-Connect (CX) is composed of two Endpoints, each of which is associated with a particular Port (physical or virtual interface).

Device Under Test Information

Device Under Test	DUT Name	1.0
	DUT Hardware Version	AXE11000
	DUT Software Version	3.0.0.4.386_44266
	DUT Serial Number	123456

Test Configuration

Test Configuration	LANforge ip	192.168.242.2
	LANforge port	8080
	Upstream	1.1.eth2
	Test Duration	60s
	Polling Interval	5s
	Total No. of Devices	4

Radio Configuration

Individual throughput mcast download bps: 3000000 traffic VI (WiFi).

The below graph represents individual throughput for 4 clients running VI (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

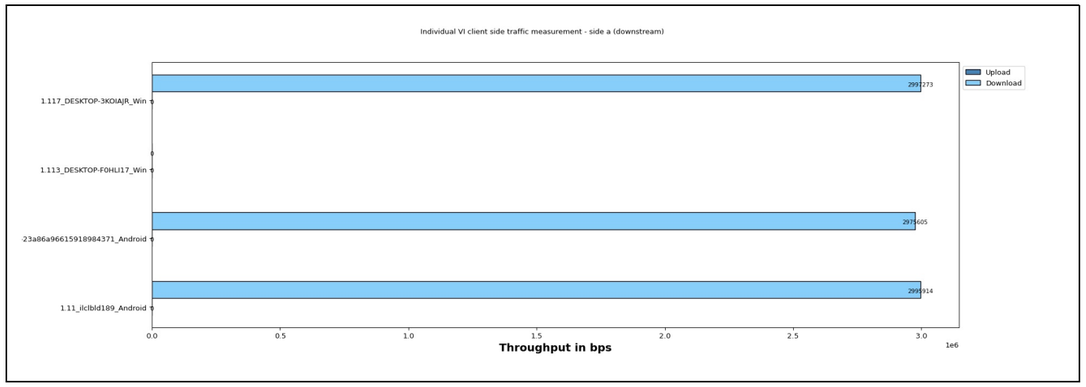

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_ilclbld189_Android	1.11	ilclbld189	motorola motorola one fusion+ r	MLT-mrx-VI-wlan0-1	1.11.wlan0	802.11abgn-AC 80	0a:5b:89:56:a9:ae	OpenWifi_psk2	36	VI	Mcast	0	3000000	0	2995914	0.0
1.15_cn-east-1a-	1.15	cn-east-1a-	HUAWEI LLD-AL10	MLT-mrx-VI-	1.15.wlan0	AUTO 20	c4:9f:4c:fc:9b:f3		0	VI	Mcast	0	3000000	0	2975605	0.0

23a86a96615918984371_Android		23a86a96615918984371	r9 sdk: 28	wlan0-2												
1.113_DESKTOP-F0HLI17_Win	1.113	DESKTOP-F0HLI17	Win/x86 6.2	MLT-mrx-VI-wlan1-3	1.113.wlan1		00:00:00:00:00:00		[channel: 3]	VI	Mcast	0	3000000	0	0	0.0
1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	Win/x86 6.2	MLT-mrx-VI-wlan0-4	1.117.wlan0	802.11abgn-AC 20 1x1	f4:8c:50:e2:01:67	OpenWifi_psk2	36	VI	Mcast	0	3000000	0	2997273	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic VI (WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

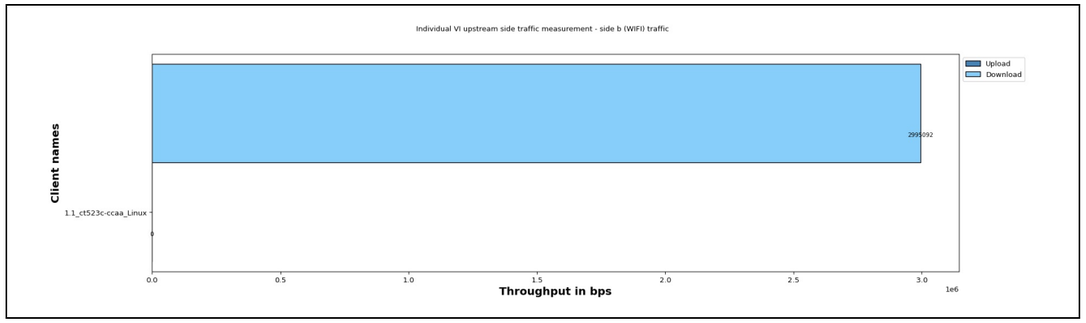

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	MLT-mtx-VI-eth2-0	1.1.eth2		9c:69:b4:63:72:ce		[channel: 2]	VI	Mcast	0	0	0	2995092	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic VO (WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

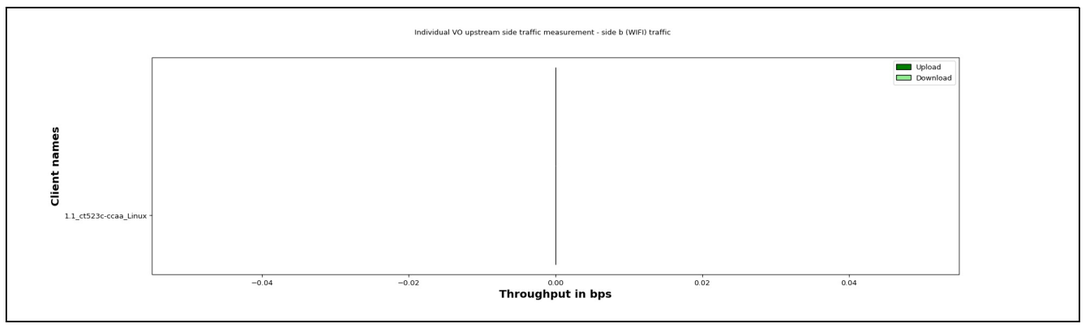

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.11androidmoto_C4_R3_TCP_Bi-di_VO-0-B	1.1.di_VO	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0

Layer 3 Cx Traffic Last Reporting Interval 1.1.eth2

		Total-					UL-	UL-	DL-	DL-					Rx-	Tx-								Ul-Rx-	Ul-Rx-	Ul-		Dl-Rx-	Dl-	Dl-	DL-Rx-

Time epoch	Time	Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	Min-PDU	Max-PDU	Min-PDU	Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Link-Rate	Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Goodput-bps	Rate-ll	Rx-Pkts-ll	Ul-Rx-Drop_Percent	Goodput-bps	Rx-Rate-ll	Rx-Pkts-ll	Drop-Percent
1760428437	10_14_2025_13_23_57	4	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.1.eth2	202087	16454082	2.5 Gbps	2.5 Gbps	NaN	NaN	NaN	9c:69:b4:63:72:ce	[channel: 2]	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.11.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760428437	10_14_2025_13_23_57	4	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.11.wlan0	9944944	98571	433 Mbps	433 Mbps	-35	92:3C:B3:6C:43:41	802.11abgn-AC 80	0a:5b:89:56:a9:ae	36	-206	0	2995914	3083868	15769	0.0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.15.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760428437	10_14_2025_13_23_57	4	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.15.wlan0	2984953	63191	0 bps	NaN	NaN	NaN	AUTO 20	c4:9f:4c:fc:9b:f3	0	-764	0	2975605	3083908	15652	0.0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.113.wlan1

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760428437	10_14_2025_13_23_57	4	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.113.wlan1	0	0	0	0	NaN	NaN	NaN	00:00:00:00:00:00	[channel: 3]	0	0	0	0	0	0.0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.117.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760428437	10_14_2025_13_23_57	4	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.117.wlan0	9754063	14613	526.5 Mbps	526 Mbps	-35 dBm	92:3C:B3:6C:43:41	802.11abgn-AC 20 1x1	f4:8c:50:e2:01:67	36	-19545	4	2997273	3083297	15697	0.0	0	0	0	0