Multicast Test

2025-10-14-16-43-12

Objective

The Layer 3 Traffic Generation Test is designed to test the performance of the Access Point by running layer 3 Cross-Connect Traffic. Layer-3 Cross-Connects represent a stream of data flowing through the system under test. A Cross-Connect (CX) is composed of two Endpoints, each of which is associated with a particular Port (physical or virtual interface).

Device Under Test Information

Device Under Test	DUT Name	1.0
	DUT Hardware Version	AXE11000
	DUT Software Version	3.0.0.4.386_44266
	DUT Serial Number	123456

Test Configuration

Test Configuration	LANforge ip	192.168.242.2
	LANforge port	8080
	Upstream	1.1.eth2
	Test Duration	60s
	Polling Interval	5s
	Total No. of Devices	3

Radio Configuration

Individual throughput mcast download bps: 3000000 traffic BK (WiFi).

The below graph represents individual throughput for 3 clients running BK (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

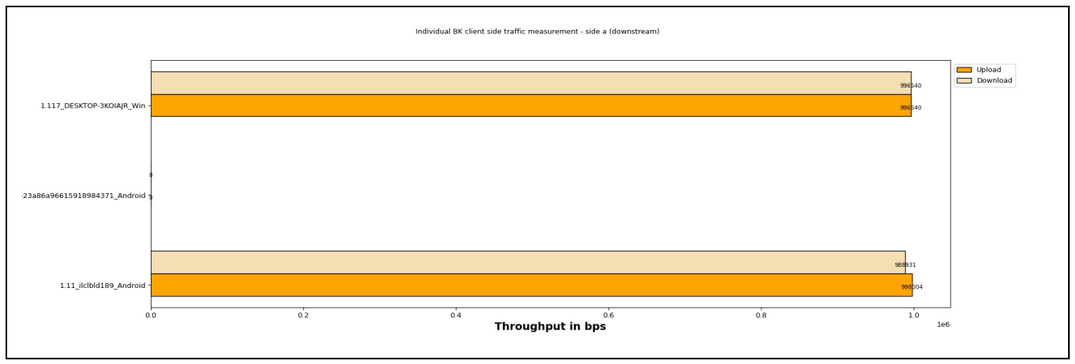

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_ilclbld189_Android	1.11	ilclbld189	motorola motorola one fusion+ r	1.11androidmoto_C4_R3_TCP_Bi-di_BK-9-A	1.11.di_BK	NA	NA	NA	NA	NA	LF/TCP	NA	NA	998004	988931	0.0
1.15_cn-east-1a-23a86a96615918984371_Android	1.15	cn-east-1a-23a86a96615918984371	HUAWEI LLD-AL10 r9 sdk: 28	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_BK-10-A	1.15.di_BK	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0
1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	Win/x86 6.2	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_BK-11-A	1.117.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	996540	996540	0.0

1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	6.2	3KOIAJR_TCP_Bi-di_BE-11-A	1.117.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	998340	998340	0.0

Individual throughput mcast download bps: 3000000 traffic BE (WiFi).

The below graph represents individual throughput for 3 clients running BE (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

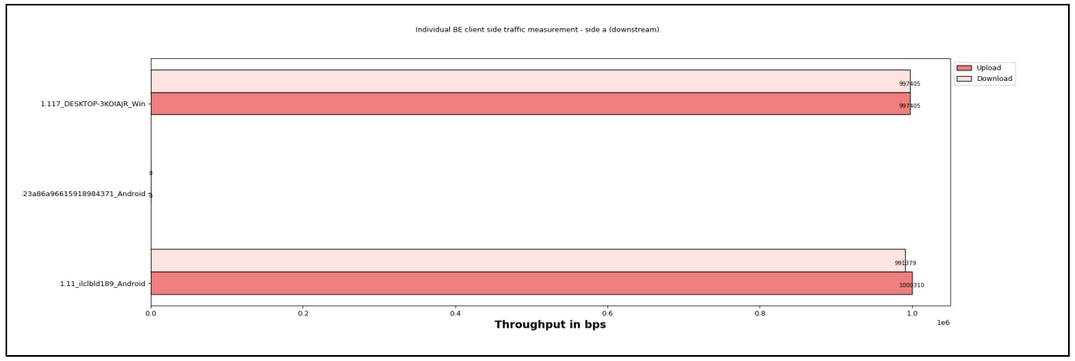

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_ilclbld189_Android	1.11	ilclbld189	motorola motorola one fusion+ r	1.11androidmoto_C4_R3_TCP_Bi-di_BE-6-A	1.11.di_BE	NA	NA	NA	NA	NA	LF/TCP	NA	NA	1000310	991379	0.0
1.15_cn-east-1a-23a86a96615918984371_Android	1.15	cn-east-1a-23a86a96615918984371	HUAWEI LLD-AL10 r9 sdk: 28	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_BE-7-A	1.15.di_BE	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0
1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	Win/x86 6.2	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_BE-8-A	1.117.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	997405	997405	0.0

Individual throughput mcast download bps: 3000000 traffic VI (WiFi).

The below graph represents individual throughput for 6 clients running VI (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

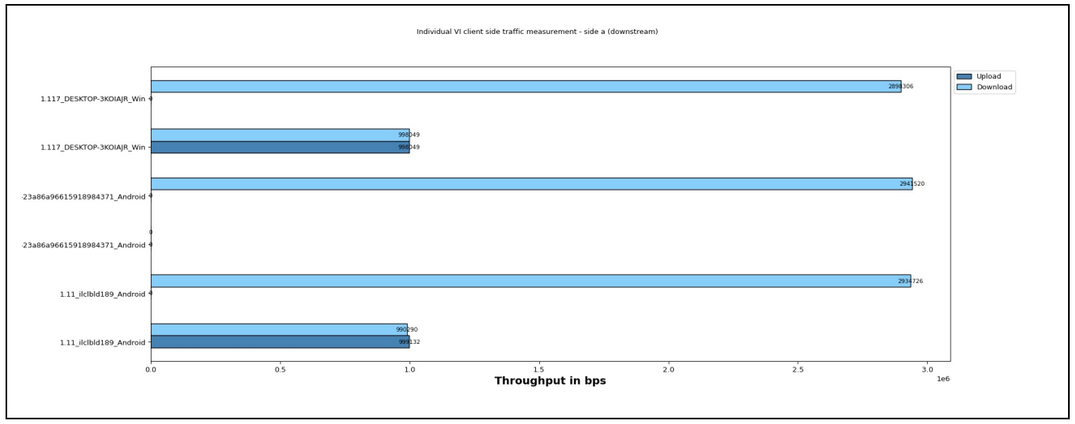

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_ilclbld189_Android	1.11	ilclbld189	motorola motorola one fusion+ r	1.11androidmoto_C4_R3_TCP_Bi-di_VI-3-A	1.11.di_VI	NA	NA	NA	NA	NA	LF/TCP	NA	NA	999132	990290	0.0
1.11_ilclbld189_Android	1.11	ilclbld189	motorola motorola one fusion+ r	MLT-mrx-VI-wlan0-1	1.11.wlan0	802.11abgn-AC 80	0a:5b:89:56:a9:ae	OpenWifi_psk2	36	VI	Mcast	0	3000000	0	2934726	0.0

1.15_cn-east-1a-23a86a96615918984371_Android	1.15	cn-east-1a-23a86a96615918984371	HUAWEI LLD-AL10 r9 sdk: 28	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_VI-4-A	1.15.di_VI	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0
1.15_cn-east-1a-23a86a96615918984371_Android	1.15	cn-east-1a-23a86a96615918984371	HUAWEI LLD-AL10 r9 sdk: 28	MLT-mrx-VI-wlan0-2	1.15.wlan0	AUTO 20	c4:9f:4c:fc:9b:f3		0	VI	Mcast	0	3000000	0	2941520	0.0
1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	Win/x86 6.2	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_VI-5-A	1.117.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	998049	998049	0.0
1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	Win/x86 6.2	MLT-mrx-VI-wlan0-3	1.117.wlan0	802.11abgn-AC 20 1x1	f4:8c:50:e2:01:67	OpenWifi_psk2	36	VI	Mcast	0	3000000	0	2898306	0.0

Individual throughput mcast download bps: 3000000 traffic VO (WiFi).

The below graph represents individual throughput for 3 clients running VO (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

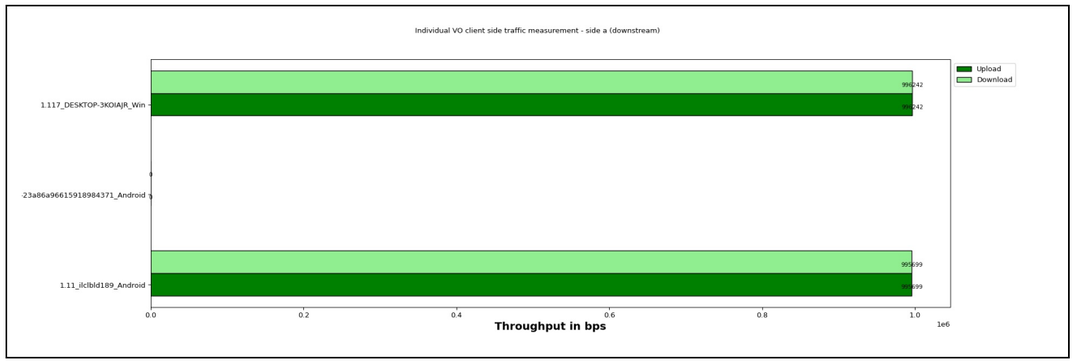

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_ilclbld189_Android	1.11	ilclbld189	motorola motorola one fusion+ r	1.11androidmoto_C4_R3_TCP_Bi-di_VO-0-A	1.11.di_VO	NA	NA	NA	NA	NA	LF/TCP	NA	NA	995699	995699	0.0
1.15_cn-east-1a-23a86a96615918984371_Android	1.15	cn-east-1a-23a86a96615918984371	HUAWEI LLD-AL10 r9 sdk: 28	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_VO-1-A	1.15.di_VO	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0
1.117_DESKTOP-3KOIAJR_Win	1.117	DESKTOP-3KOIAJR	Win/x86 6.2	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_VO-2-A	1.117.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	996242	996242	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic BK (WiFi).

The below graph represents individual throughput for 3 clients running BK (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

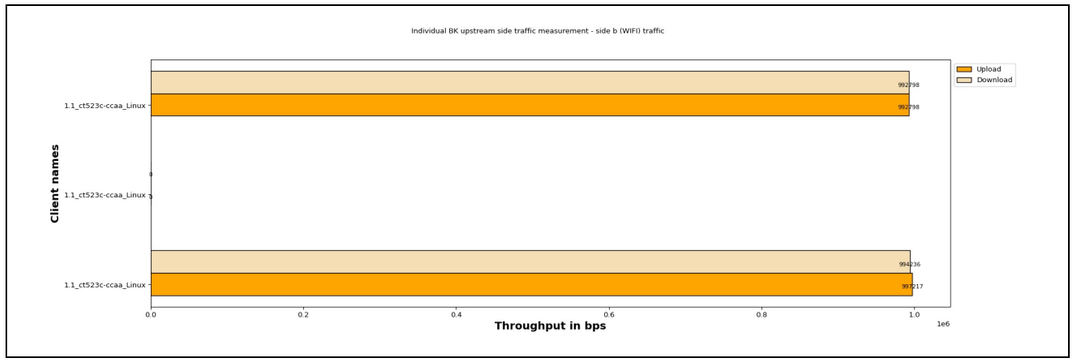

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)

1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.11androidmoto_C4_R3_TCP_Bi-di_BK-9-B	1.1.di_BK	NA	NA	NA	NA	NA	LF/TCP	NA	NA	997217	994236	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_BK-10-B	1.1.di_BK	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_BK-11-B	1.1.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	992798	992798	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic BE (WiFi).

The below graph represents individual throughput for 3 clients running BE (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

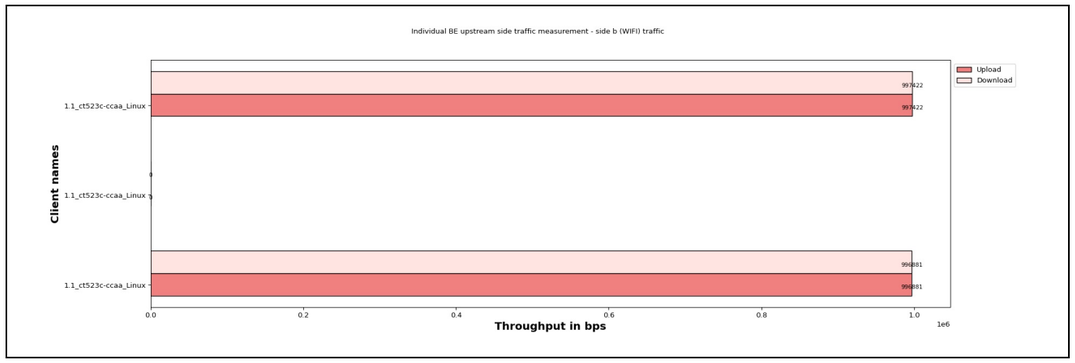

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.11androidmoto_C4_R3_TCP_Bi-di_BE-6-B	1.1.di_BE	NA	NA	NA	NA	NA	LF/TCP	NA	NA	996881	996881	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_BE-7-B	1.1.di_BE	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_BE-8-B	1.1.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	997422	997422	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic VI (WiFi).

The below graph represents individual throughput for 4 clients running VI (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

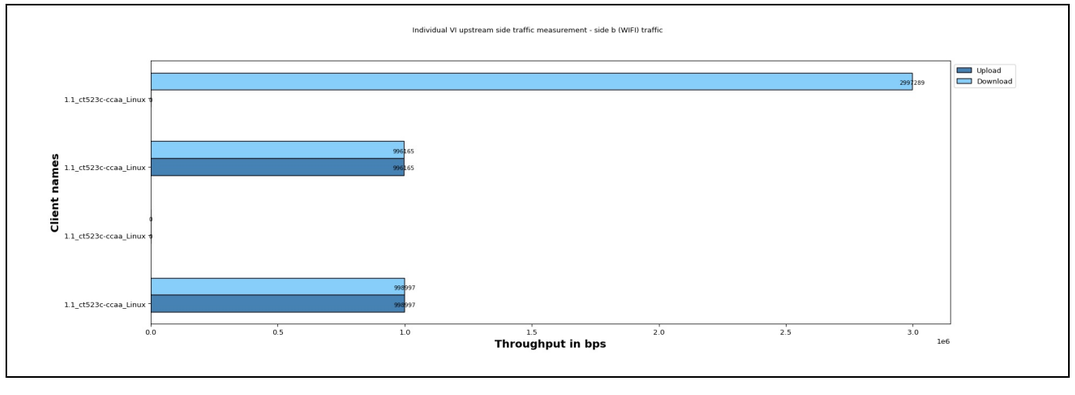

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.11androidmoto_C4_R3_TCP_Bi-di_VI-3-B	1.1.di_VI	NA	NA	NA	NA	NA	LF/TCP	NA	NA	998997	998997	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_VI-4-B	1.1.di_VI	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0

1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_VI-5-B	1.1.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	996165	996165	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	MLT-mtx-VI-eth2-0	1.1.eth2		9c:69:b4:63:72:ce		[channel: 2]	VI	Mcast	0	0	0	2997289	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic VO (WiFi).

The below graph represents individual throughput for 3 clients running VO (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

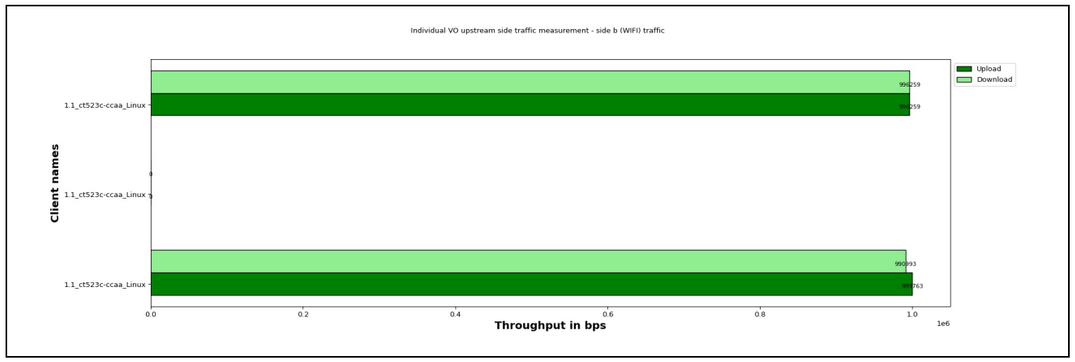

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.11androidmoto_C4_R3_TCP_Bi-di_VO-0-B	1.1.di_VO	NA	NA	NA	NA	NA	LF/TCP	NA	NA	999763	990993	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.15androidS5_R2_C1_Hnr_TCP_Bi-di_VO-1-B	1.1.di_VO	NA	NA	NA	NA	NA	LF/TCP	NA	NA	0	0	0.0
1.1_ct523c-ccaa_Linux	1.1	ct523c-ccaa	Linux/x86-64	1.117WinDESKTOP-3KOIAJR_TCP_Bi-di_VO-2-B	1.1.3KOIAJR_TCP_Bi	NA	NA	NA	NA	NA	LF/TCP	NA	NA	996259	996259	0.0

Layer 3 Cx Traffic Last Reporting Interval 1.1.eth2

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760440483	10_14_2025_16_44_43	3	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.1.eth2	7913131	139752790	2.5 Gbps	2.5 Gbps	NaN	NaN	NaN	9c:69:b4:63:72:ce	[channel: 2]	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.11.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760440483	10_14_2025_16_44_43	3	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.11.wlan0	76609561	4319002	433 Mbps	433 Mbps	-33	92:3C:B3:6C:43:41	802.11abgn-AC 80	0a:5b:89:56:a9:ae	36	-236	0	2934726	3082601	15349	0.0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.15.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760440483	10_14_2025_16_44_43	3	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.15.wlan0	3086744	127330	0 bps	NaN	NaN	NaN	AUTO 20	c4:9f:4c:fc:9b:f3	0	-158	0	2941520	3083172	15420	0.0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.117.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760440483	10_14_2025_16_44_43	3	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.117.wlan0	72889135	3989749	585 Mbps	585 Mbps	-36 dBm	92:3C:B3:6C:43:41	802.11abgn-AC 20 1x1	f4:8c:50:e2:01:67	36	-19548	21	2898306	3062925	15128	0.0	0	0	0	0