Mixed Traffic Test (Parallel)

2025-10-16-12-45-32

Test Setup Information

Overall Setup Info For all Tests	DUT Model	Test_DUT
	DUT Firmware	NA
	SSID	Test Configured
	Security	Test Configured
	No of Devices	1 (Virtual Clients: 0, Windows: 0, Linux: 0, Mac: 0, Android: 1 ,iOS: 0)
	Test Duration (HH:MM:SS)	00:01:00

Objective

The Candela mixed traffic test is designed to measure the access point performance andstability by running multiple traffic on real clients like Android, Linux, Windows, and IOSconnected to the access point. This test allows the user to choose multiple types of traffic likeclient capacity test, web browser test, video streaming test ping test. Along with theperformance measurements are client connection times, Station 4-Way Handshake time, DHCPtimes, and more. The expected behavior is for the AP to be able to handle all types of traffic onthe several stations (within the limitations of the AP specs) and Make sure all clients can run alltypes of traffic.

Traffic Details

Sno	Test Cases	Test Duration	Test Status
1	Ping Test	1.0 minute	Executed
2	Quality Of Service(QOS) Test ['VO', 'VI', 'BE', 'BK']	1.0 minute	Executed
3	FTP Test	1.0 minute	Executed
4	HTTP Test	1.0 minute	Executed
5	Multicast Test	1.0 minute	Executed

1. Ping Test

Test Configuration

Test Setup Information	IP / Website	google.com

Packets sent vs packets received vs packets dropped

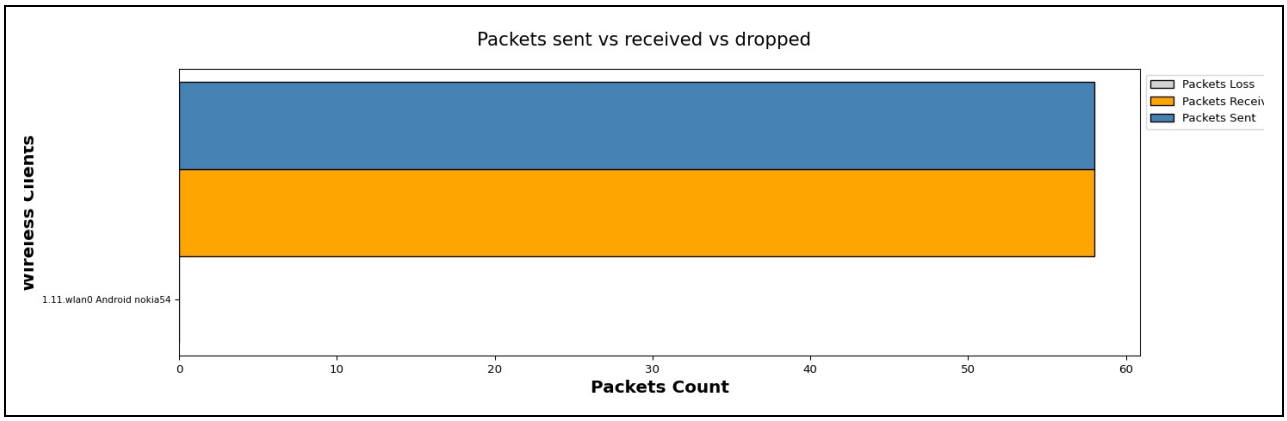

Wireless Client	MAC	Channel	SSID	Mode	Packets Sent	Packets Received	Packets Loss
nokia54 Android	4a:a4:d7:80:16:cd	149	NETGEAR_5G_wpa2	802.11abgn-AC 80	58	58	0

Ping Latency Graph

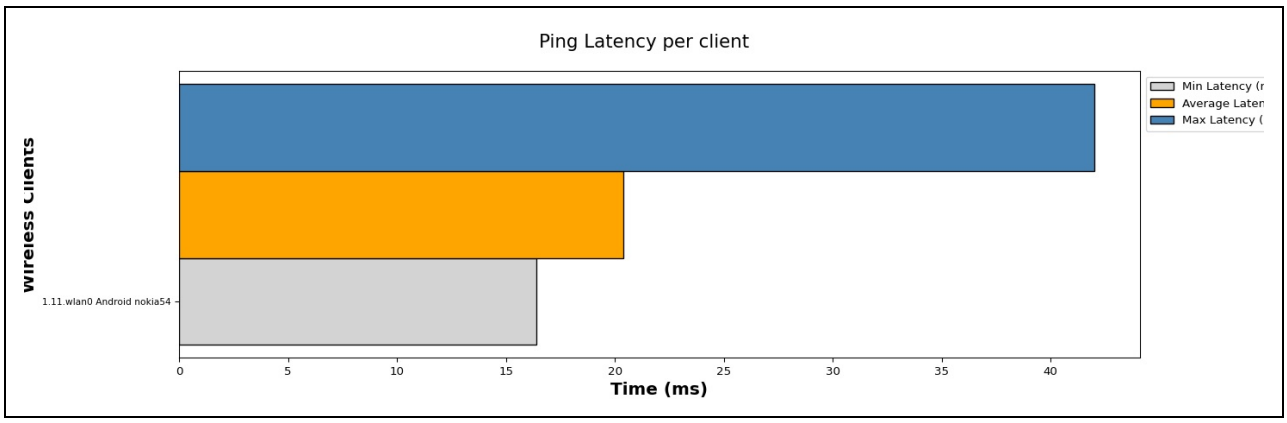

Wireless Client	MAC	Channel	SSID	Mode	Min Latency (ms)	Average Latency (ms)	Max Latency (ms)
nokia54 Android	4a:a4:d7:80:16:cd	149	NETGEAR_5G_wpa2	802.11abgn-AC 80	16.4	20.377	42.0

2. Quality Of Service(QOS) Test

Test Configuration

Test Setup Information	Protocol	TCP
	Traffic Direction	Bi-direction
	Security	Test Configured
	TOS	['VO', 'VI', 'BE', 'BK']
	Per TOS Load	Upload:1.0 Mbps,Download:1.0 Mbps

Overall Bi-direction Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

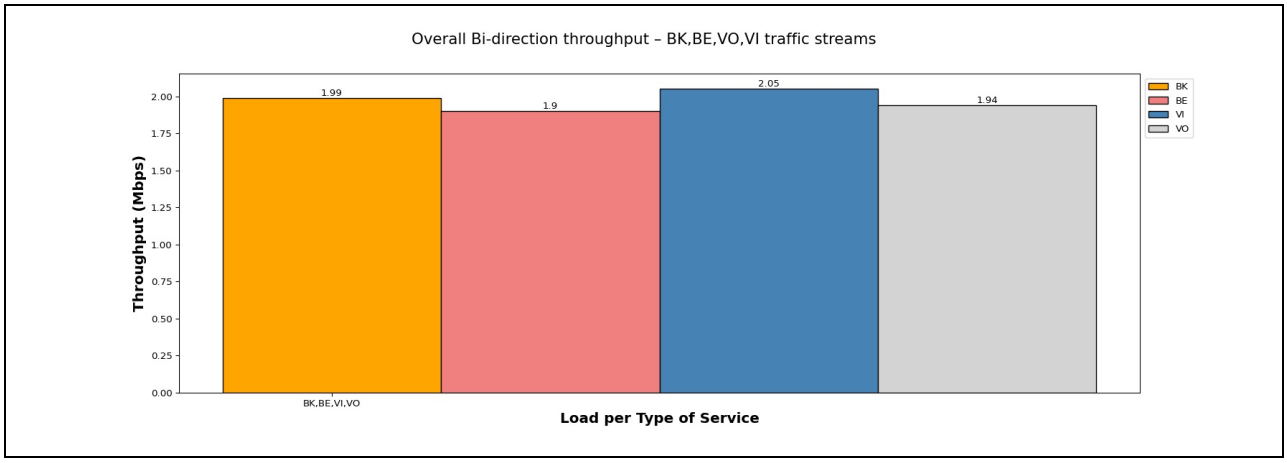

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 1 clients running BK (WiFi) traffic. X- axis shows "Throughput in Mbps" and Y-axis shows "number of clients".

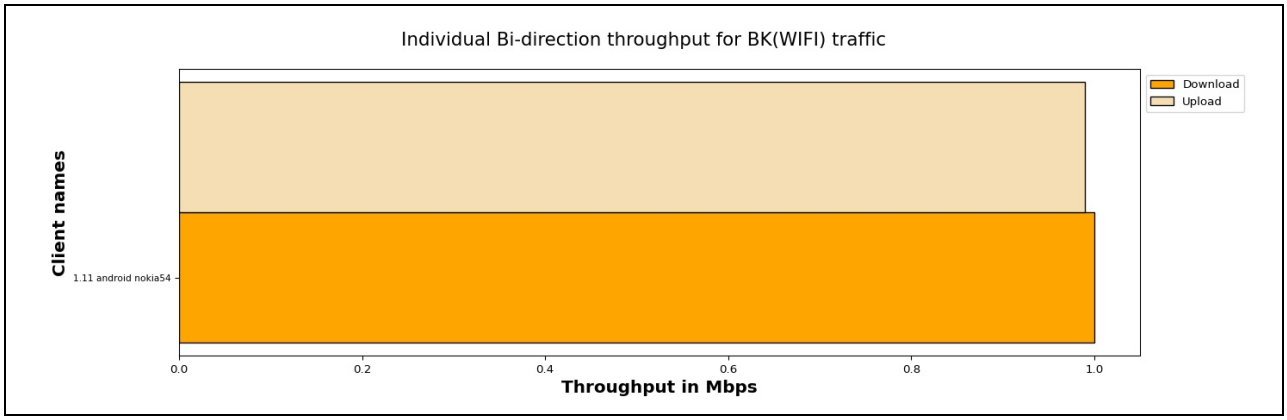

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)

1.11 android nokia54	4a:a4:d7:80:16:cd	NETGEAR_5G_wpa2	Background	1.0 Mbps	1.0 Mbps	0.94 Mbps	0.95 Mbps	0.0	0.0

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

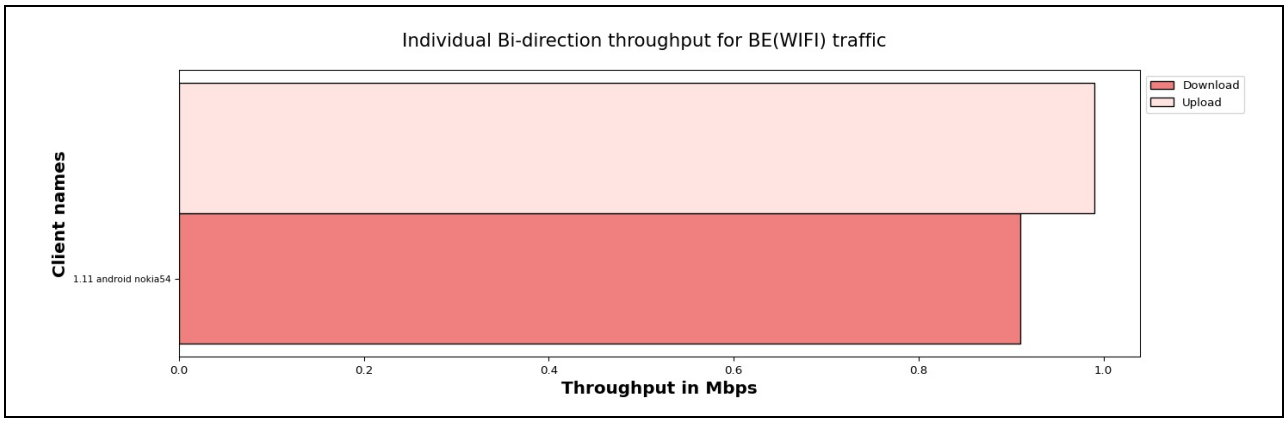

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android nokia54	4a:a4:d7:80:16:cd	NETGEAR_5G_wpa2	Besteffort	1.0 Mbps	1.0 Mbps	0.97 Mbps	0.97 Mbps	0.0	0.0

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

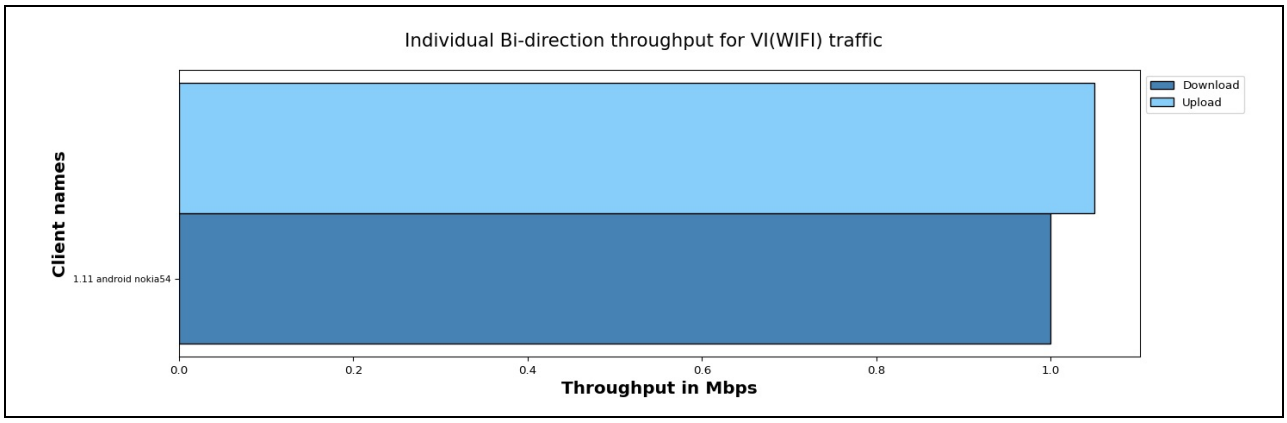

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android nokia54	4a:a4:d7:80:16:cd	NETGEAR_5G_wpa2	Video	1.0 Mbps	1.0 Mbps	1.01 Mbps	1.0 Mbps	0.0	0.0

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

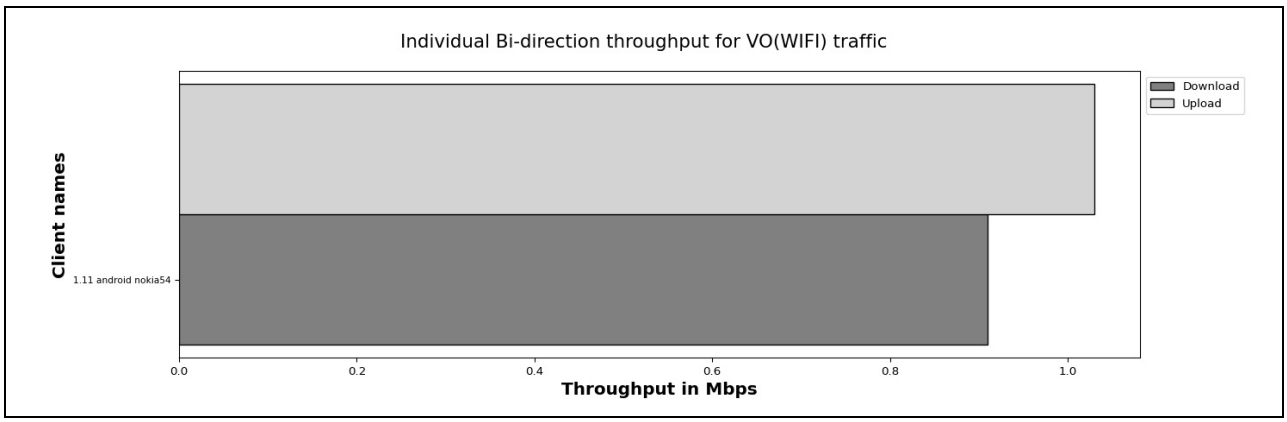

	MAC	SSID	Type of	Offered upload	Offered download	Observed average upload	Observed average	Observed Upload Drop	Observed Download Drop

Client Name			traffic	rate	rate	rate	download rate	(%)	(%)
1.11 android nokia54	4a:a4:d7:80:16:cd	NETGEAR_5G_wpa2	Voice	1.0 Mbps	1.0 Mbps	1.0 Mbps	1.01 Mbps	0.0	0.0

3. File Transfer Protocol (FTP) Test

Test Configuration

Test Setup Information	Traffic Direction	Download
	File Size	10MB
	File Location	/home/lanforge

No.of times file Download

The below graph represents number of times a file Download for each client (WiFi) traffic. X-axis shows "No of times file Download" and Y-axis shows "Client names".

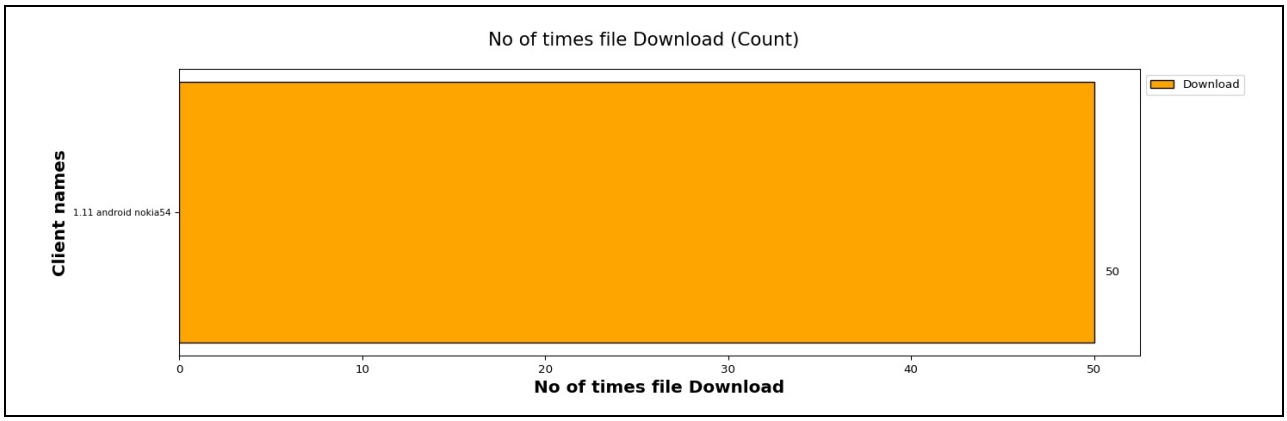

Average time taken to Download file

The below graph represents average time taken to Download for each client (WiFi) traffic. X-axis shows "Average time taken to Download a file " and Y-axis shows "Client names".

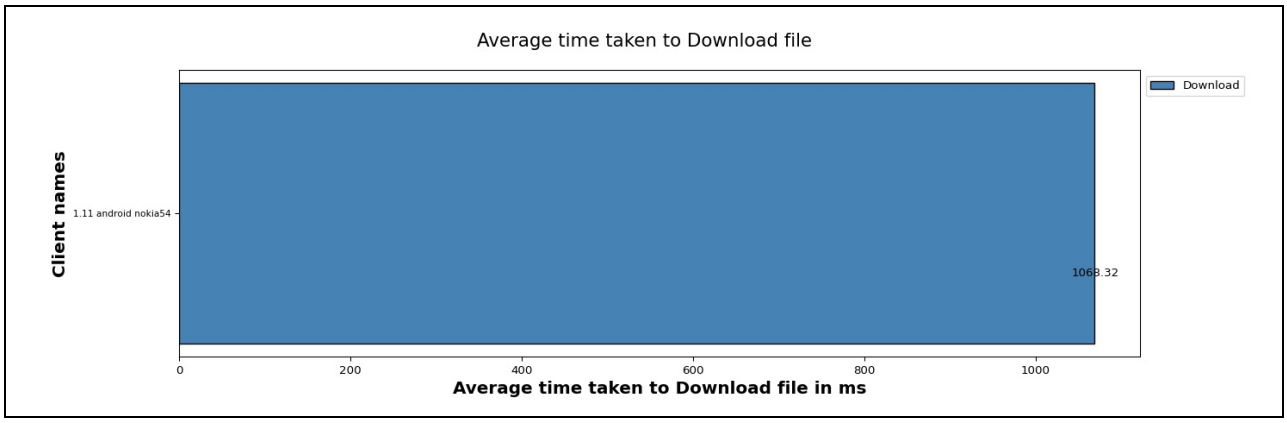

Overall Results

Clients	MAC	Channel	SSID	Mode	No of times File downloaded	Time Taken to Download file (ms)	Bytes-rd (Mega Bytes)	RX RATE (Mbps)
1.11 android nokia54	4a:a4:d7:80:16:cd	149	NETGEAR_5G_wpa2	802.11abgn-AC 80	50	1068.32	507.9696	73.2888

4. Hyper Text Transfer Protocol (HTTP) Test

Test Configuration

Test Setup Information	Traffic Direction	Download
	File Size	5MB
	File location	/usr/local/lanforge/nginx/html

No of times file Downloads

The below graph represents number of times a file downloads for each client. X- axis shows "No of times file downloads and Y-axis shows Client names.

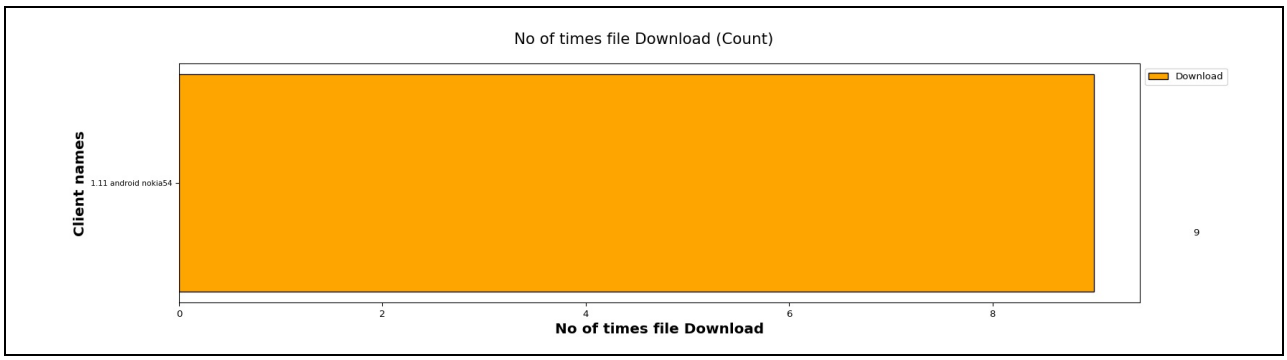

Average time taken to download file

The below graph represents average time taken to download for each client . X- axis shows "Average time taken to download a file " and Y-axis shows Client names.

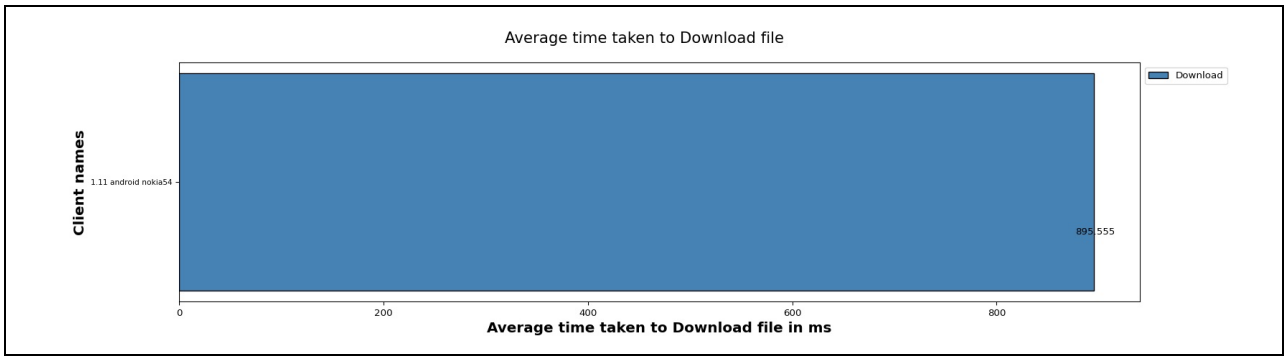

Overall Results

Clients	MAC	Channel	SSID	Mode	No of times File downloaded	Average time taken to Download file (ms)	Bytes-rd (Mega Bytes)	Rx Rate (Mbps)
1.11 android nokia54	4a:a4:d7:80:16:cd	149	NETGEAR_5G_wpa2	802.11abgn-AC 80	9	895.555	45.3229	7.0176

5. Multicast Test

Test Configuration

Test Setup Information	Protocol	UDP
	Type of Service (TOS)	VI
	Upstream Port	1.1.eth1
	Offered Load (Mbps)	3.0

Individual throughput with intended load 3.0 Mbps station for traffic VI (WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

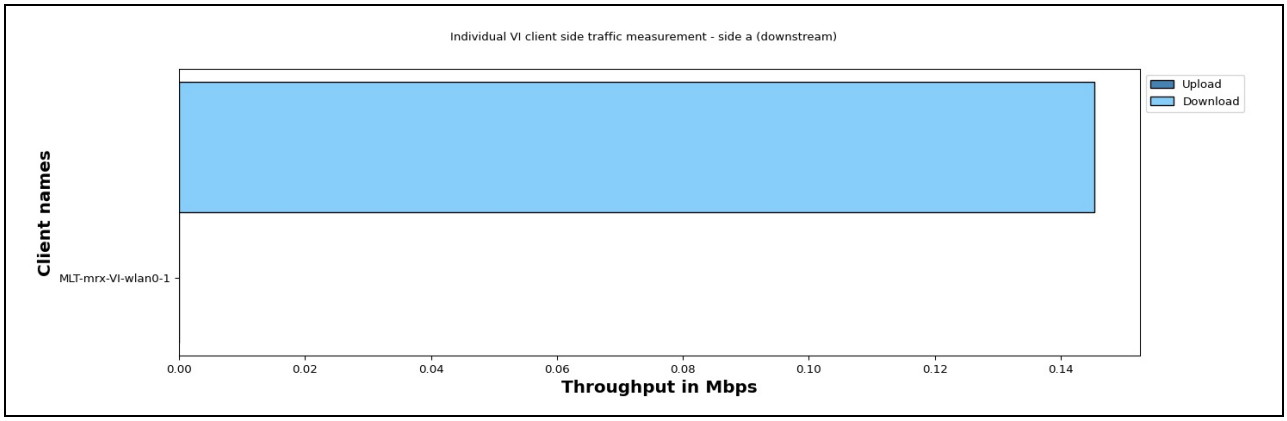

Client Name	Endp Name	HW Version	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Download Rate Per Client (Mbps)	Download Rate Per Client (Mbps)	Download Drop Percentage (%)

1.11_Cocoon_192-168-133-173_19163_do_Android	MLT-mrx-VI-wlan0-1	HMD Global Nokia 7.2 r11 sdk: 3	1.11.wlan0	802.11abgn-AC 80	4a:a4:d7:80:16:cd	NETGEAR_5G_wpa2	149	VI	Mcast	3.0	0.145333	0.0

Overall Info	contact	support@candelatech.com