Multicast Test

2025-10-16-12-45-39

Objective

The Layer 3 Traffic Generation Test is designed to test the performance of the Access Point by running layer 3 Cross-Connect Traffic. Layer-3 Cross-Connects represent a stream of data flowing through the system under test. A Cross-Connect (CX) is composed of two Endpoints, each of which is associated with a particular Port (physical or virtual interface).

Device Under Test Information

Device Under Test	DUT Name	1.0
	DUT Hardware Version	AXE11000
	DUT Software Version	3.0.0.4.386_44266
	DUT Serial Number	123456

Test Configuration

Test Configuration	LANforge ip	192.168.207.78
	LANforge port	8080
	Upstream	1.1.eth1
	Test Duration	60s
	Polling Interval	5s
	Total No. of Devices	1

Radio Configuration

Individual throughput mcast download bps: 3000000 traffic BK (WiFi).

The below graph represents individual throughput for 1 clients running BK (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

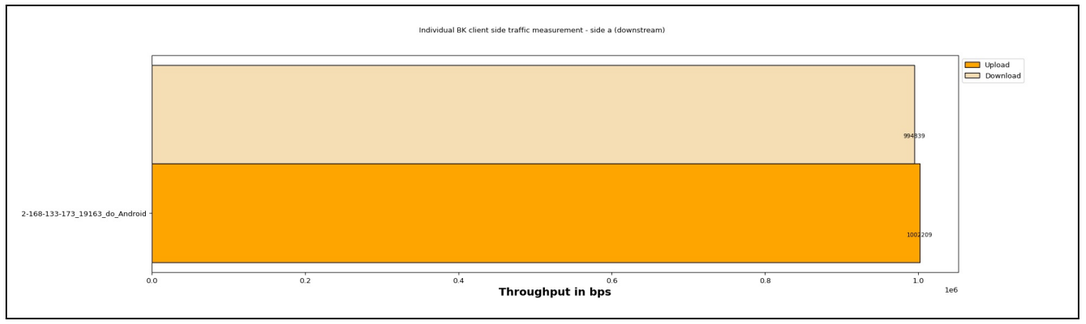

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_Cocoon_192-168-133-173_19163_do_Android	1.11	Cocoon_192-168-133-173_19163_do	HMD Global Nokia 7.2 r11 sdk: 3	1.11androidnokia54_TCP_Bi-di_BK-3-A	1.11.di_BK	NA	NA	NA	NA	NA	LF/TCP	NA	NA	1002209	994839	0.0

Individual throughput mcast download bps: 3000000 traffic BE (WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

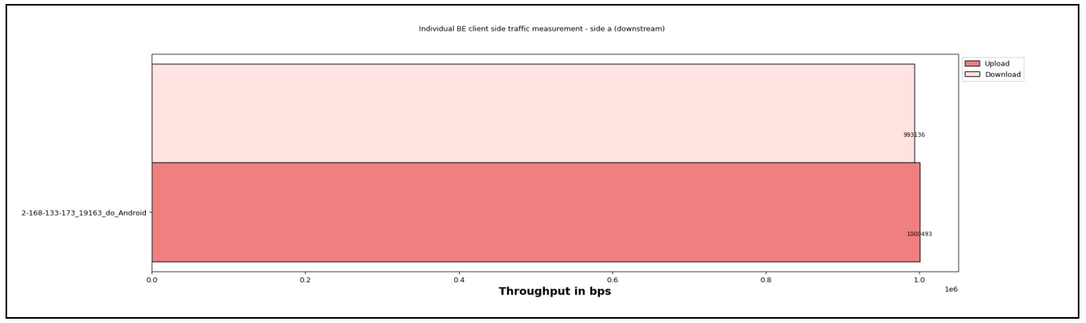

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_Cocoon_192-168-133-173_19163_do_Android	1.11	Cocoon_192-168-133-173_19163_do	HMD Global Nokia 7.2 r11 sdk: 3	1.11androidnokia54_TCP_Bi-di_BE-2-A	1.11.di_BE	NA	NA	NA	NA	NA	LF/TCP	NA	NA	1000493	993136	0.0

Individual throughput mcast download bps: 3000000 traffic VI (WiFi).

The below graph represents individual throughput for 2 clients running VI (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

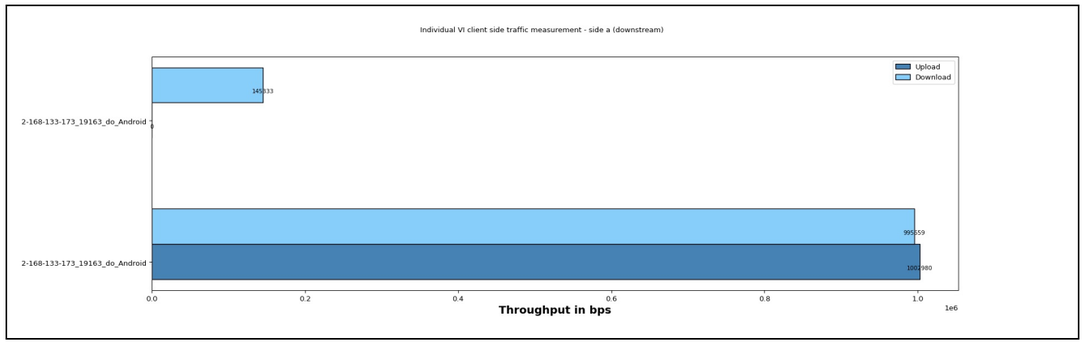

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_Cocoon_192-168-133-173_19163_do_Android	1.11	Cocoon_192-168-133-173_19163_do	HMD Global Nokia 7.2 r11 sdk: 3	1.11androidnokia54_TCP_Bi-di_VI-1-A	1.11.di_VI	NA	NA	NA	NA	NA	LF/TCP	NA	NA	1002980	995659	0.0
1.11_Cocoon_192-168-133-173_19163_do_Android	1.11	Cocoon_192-168-133-173_19163_do	HMD Global Nokia 7.2 r11 sdk: 3	MLT-mrx-VI-wlan0-1	1.11.wlan0	802.11abgn-AC 80	4a:a4:d7:80:16:cd	NETGEAR_5G_wpa2	149	VI	Mcast	0	3000000	0	145333	0.0

Individual throughput mcast download bps: 3000000 traffic VO (WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

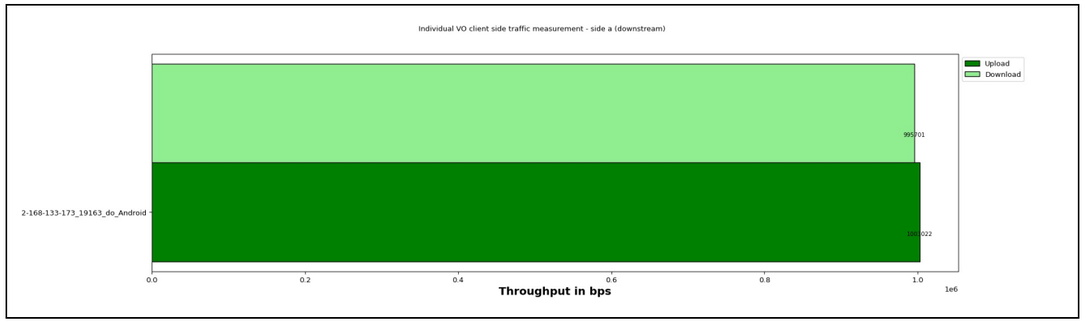

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.11_Cocoon_192-168-133-173_19163_do_Android	1.11	Cocoon_192-168-133-173_19163_do	HMD Global Nokia 7.2 r11 sdk: 3	1.11androidnokia54_TCP_Bi-di_VO-0-A	1.11.di_VO	NA	NA	NA	NA	NA	LF/TCP	NA	NA	1003022	995701	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic BK (WiFi).

The below graph represents individual throughput for 1 clients running BK (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

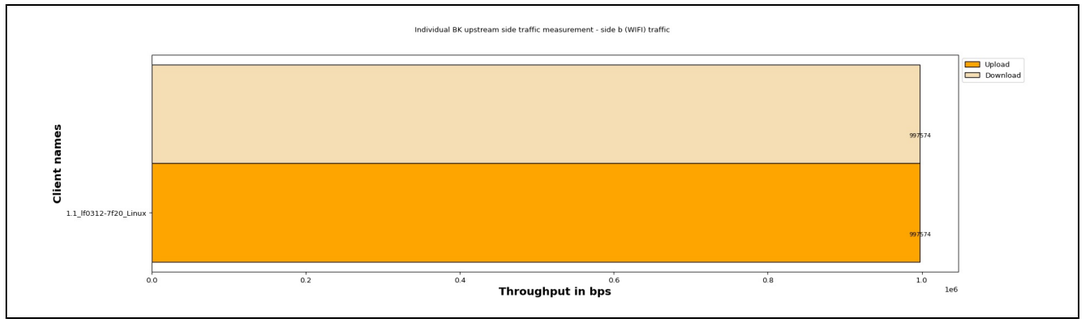

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_lf0312-7f20_Linux	1.1	lf0312-7f20	Linux/x86-64	1.11androidnokia54_TCP_Bi-di_BK-3-B	1.1.di_BK	NA	NA	NA	NA	NA	LF/TCP	NA	NA	997574	997574	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic BE (WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

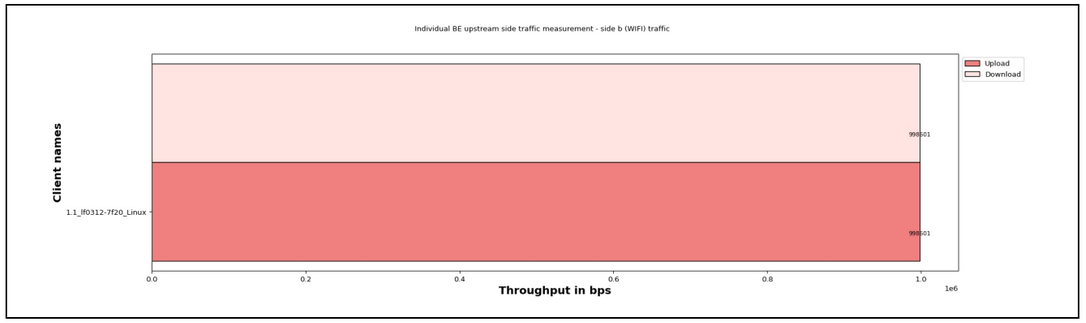

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_lf0312-7f20_Linux	1.1	lf0312-7f20	Linux/x86-64	1.11androidnokia54_TCP_Bi-di_BE-2-B	1.1.di_BE	NA	NA	NA	NA	NA	LF/TCP	NA	NA	998601	998601	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic VI (WiFi).

The below graph represents individual throughput for 2 clients running VI (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

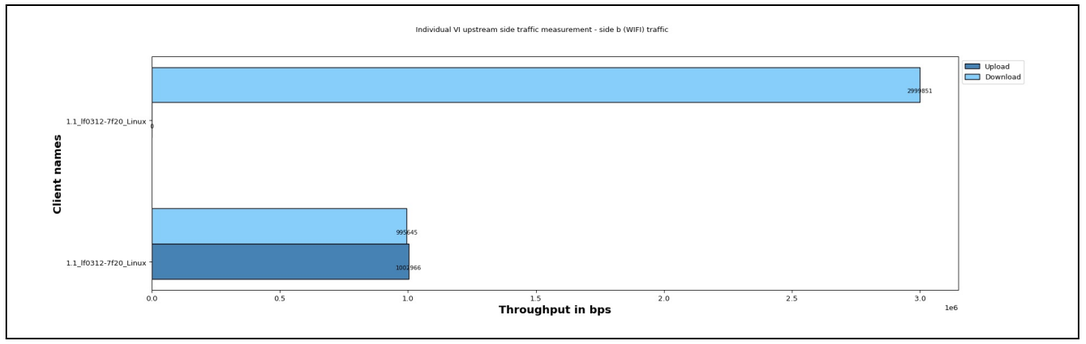

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_lf0312-7f20_Linux	1.1	lf0312-7f20	Linux/x86-64	1.11androidnokia54_TCP_Bi-di_VI-1-B	1.1.di_VI	NA	NA	NA	NA	NA	LF/TCP	NA	NA	1002966	995645	0.0
1.1_lf0312-7f20_Linux	1.1	lf0312-7f20	Linux/x86-64	MLT-mtx-VI-eth1-0	1.1.eth1		00:03:2d:3f:7f:21		[channel: 1]	VI	Mcast	0	0	0	2999851	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic VO (WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

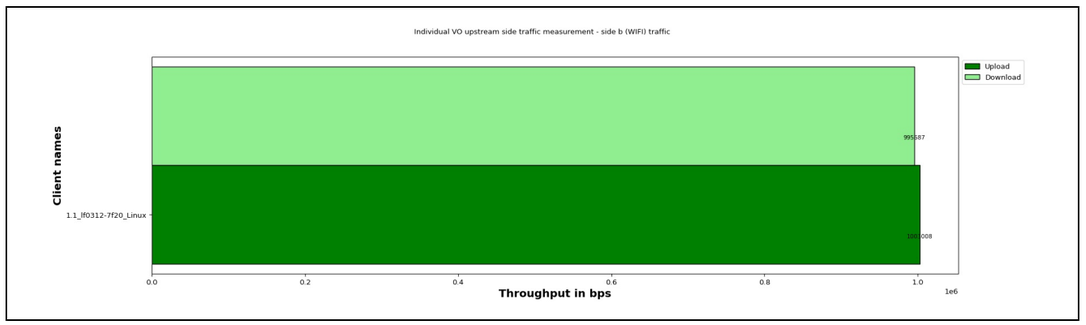

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_lf0312-7f20_Linux	1.1	lf0312-7f20	Linux/x86-64	1.11androidnokia54_TCP_Bi-di_VO-0-B	1.1.di_VO	NA	NA	NA	NA	NA	LF/TCP	NA	NA	1003008	995687	0.0

Layer 3 Cx Traffic Last Reporting Interval 1.1.eth1

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent

1760599027	10_16_2025_12_47_07	1	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.1.eth1	4318382	56183114	100 Mbps	100 Mbps	NaN	NaN	NaN	00:03:2d:3f:7f:21	[channel: 1]	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.11.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1760599027	10_16_2025_12_47_07	1	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.11.wlan0	68368409	4618467	433 Mbps	433 Mbps	-21	94:A6:7E:74:26:33	802.11abgn-AC 80	4a:a4:d7:80:16:cd	149	1403	0	145334	150597	702	0.0	0	0	0	0