Multicast Test

2025-09-16-16-31-16

Objective

The Layer 3 Traffic Generation Test is designed to test the performance of the Access Point by running layer 3 Cross-Connect Traffic. Layer-3 Cross-Connects represent a stream of data flowing through the system under test. A Cross-Connect (CX) is composed of two Endpoints, each of which is associated with a particular Port (physical or virtual interface).

Device Under Test Information

Device Under Test	DUT Name	1.0
	DUT Hardware Version	AXE11000
	DUT Software Version	3.0.0.4.386_44266
	DUT Serial Number	123456

Test Configuration

Test Configuration	LANforge ip	192.168.204.75
	LANforge port	8080
	Upstream	1.1.eth1
	Test Duration	30s
	Polling Interval	5s
	Total No. of Devices	2

Radio Configuration

Individual throughput mcast download bps: 3000000 traffic BE (WiFi).

The below graph represents individual throughput for 2 clients running BE (WiFi) traffic. Y- axis shows “Client names“ and X-axis shows “Throughput in Mbps”.

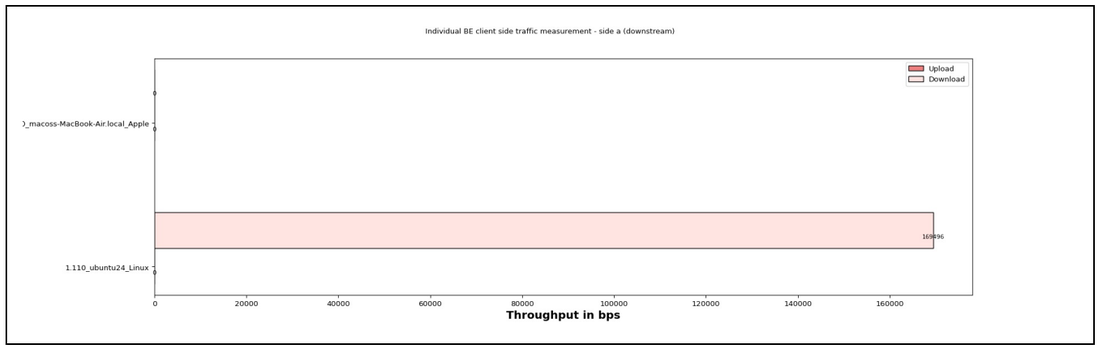

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.110_ubuntu24_Linux	1.110	ubuntu24	Linux/x86-64	MLT-mrx-BE-wlan0-1	1.110.wlan0	802.11bgn-20 2x2	5c:5f:67:98:38:86	NETGEAR_2G_wpa2	11	BE	Mcast	0	3000000	0	169496	0.0
1.400_macoss-MacBook-Air.local_Apple	1.400	macoss-MacBook-Air.local	Apple/x86-64	MLT-mrx-BE-	1.400.en0	802.11abgn-BE 20 2x2	30:35:ad:c5:e1:be	NETGEAR_2G_wpa2	11	BE	Mcast	0	3000000	0	0	0.0

				en0-2												

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 3000000 /station for traffic BE (WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

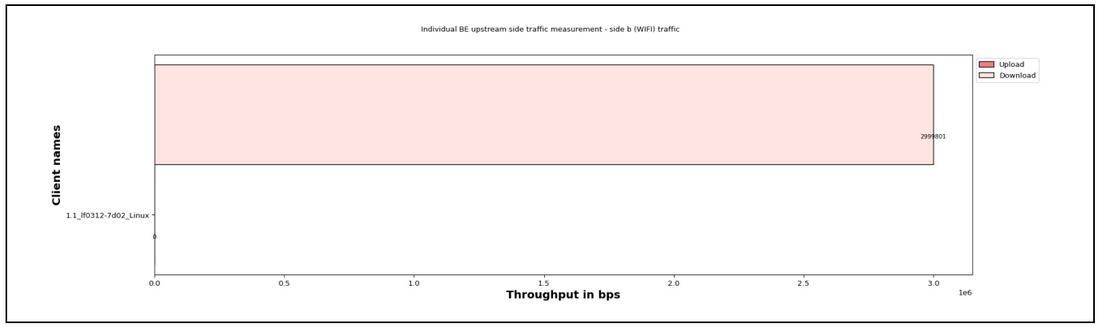

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_lf0312-7d02_Linux	1.1	lf0312-7d02	Linux/x86-64	MLT-mtx-BE-eth1-0	1.1.eth1		00:03:2d:3f:7d:03		[channel: 1]	BE	Mcast	0	3000000	0	2999801	0.0

Layer 3 Cx Traffic Last Reporting Interval 1.1.eth1

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758020536	09_16_2025_16_32_16	2	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.1.eth1	34987	2599839	1 Gbps	1 Gbps	NaN	NaN	NaN	00:03:2d:3f:7d:03	[channel: 1]	0	0	0	0	0	0.0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.110.wlan0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758020536	09_16_2025_16_32_16	2	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.110.wlan0	63392	15	144.4 Mbps	0 Mbps	-14 dBm	94:A6:7E:74:26:22	802.11bgn 20 2x2	5c:5f:67:98:38:86	11	172	4	169496	174492	445	0.0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.400.en0

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758020536	09_16_2025_16_32_16	2	0	0	3000000	3000000	MTU	MTU	MTU	MTU	-1	1.400.en0	1843207	33079	304.2 Mbps	145 Mbps	-28 dBm	94:A6:7E:74:26:22	802.11abgn-BE 20 2x2	30:35:ad:c5:e1:be	11	0	0	0	0	0	0.0	0	0	0	0