Multicast Test

2025-09-16-17-04-34

Objective

The Layer 3 Traffic Generation Test is designed to test the performance of the Access Point by running layer 3 Cross-Connect Traffic. Layer-3 Cross-Connects represent a stream of data flowing through the system under test. A Cross-Connect (CX) is composed of two Endpoints, each of which is associated with a particular Port (physical or virtual interface).

Device Under Test Information

Device Under Test	DUT Name	1.0
	DUT Hardware Version	AXE11000
	DUT Software Version	3.0.0.4.386_44266
	DUT Serial Number	123456

Test Configuration

Test Configuration	LANforge ip	192.168.204.75
	LANforge port	8080
	Upstream	1.1.eth1
	Test Duration	60s
	Polling Interval	5s
	Total No. of Devices	5

Radio Configuration

Individual throughput mcast download bps: 5000000 traffic BE (WiFi).

The below graph represents individual throughput for 5 clients running BE (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

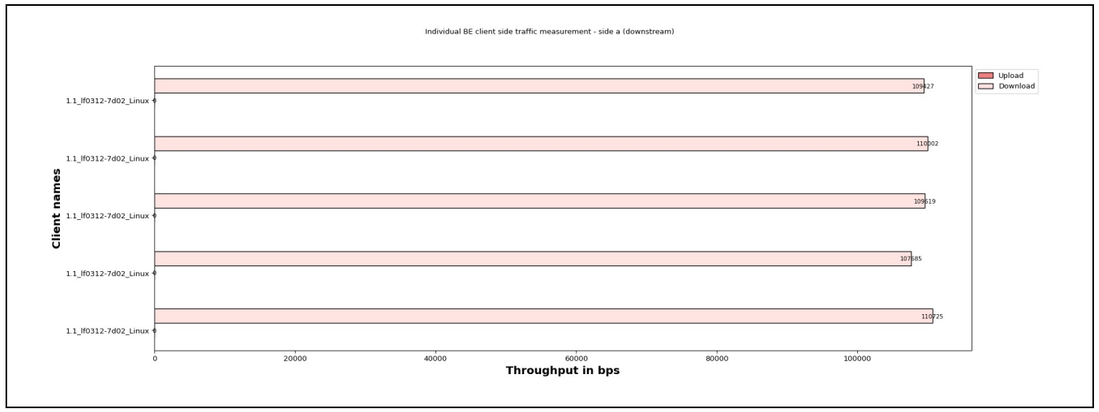

Client Alias	Host eid	Host Name	Device Type / Hw Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_lf0312-7d02_Linux	1.1	lf0312-7d02	Linux/x86-64	MLT-mrx-BE-sta2000-1	1.1.sta2000	802.11bgn-AC 20 2x2	04:f0:21:89:74:f4	NETGEAR_2G_wpa2	11	BE	Mcast	0	5000000	0	110725	0.0
				MLT-												

1.1_lf0312-7d02_Linux	1.1	lf0312-7d02	Linux/x86-64	mrx-BE-sta2001-2	1.1.sta2001	802.11bgn-AC 20 2x2	04:f0:21:89:c6:f4	NETGEAR_2G_wpa2	11	BE	Mcast	0	5000000	0	107685	0.0
1.1_lf0312-7d02_Linux	1.1	lf0312-7d02	Linux/x86-64	MLT-mrx-BE-sta2002-3	1.1.sta2002	802.11bgn-AC 20 2x2	04:f0:21:89:c3:f4	NETGEAR_2G_wpa2	11	BE	Mcast	0	5000000	0	109619	0.0
1.1_lf0312-7d02_Linux	1.1	lf0312-7d02	Linux/x86-64	MLT-mrx-BE-sta2003-4	1.1.sta2003	802.11bgn-AC 20 2x2	04:f0:21:89:e6:f4	NETGEAR_2G_wpa2	11	BE	Mcast	0	5000000	0	110002	0.0
1.1_lf0312-7d02_Linux	1.1	lf0312-7d02	Linux/x86-64	MLT-mrx-BE-sta2004-5	1.1.sta2004	802.11bgn-AC 20 2x2	04:f0:21:89:41:f4	NETGEAR_2G_wpa2	11	BE	Mcast	0	5000000	0	109427	0.0

Individual throughput upstream endp, offered upload bps: 0 offered download bps: 5000000 /station for traffic BE (WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. Y- axis shows "Client names" and X-axis shows "Throughput in Mbps".

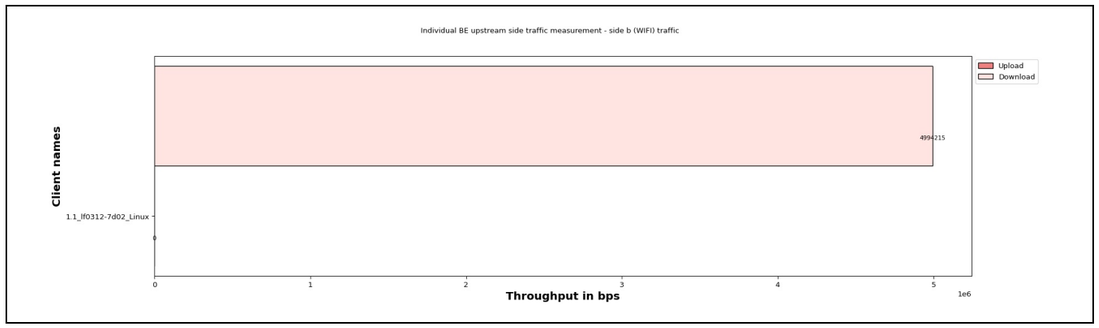

Client Alias	Host eid	Host Name	Device Type / HW Ver	Endp Name	Port Name	Mode	Mac	SSID	Channel	Type of traffic	Traffic Protocol	Offered Upload Rate Per Client	Offered Download Rate Per Client	Upload Rate Per Client	Download Rate Per Client	Drop Percentage (%)
1.1_lf0312-7d02_Linux	1.1	lf0312-7d02	Linux/x86-64	MLT-mtx-BE-eth1-0	1.1.eth1		00:03:2d:3f:7d:03		[channel: 1]	BE	Mcast	0	5000000	0	4994215	0.0

Layer 3 Cx Traffic Last Reporting Interval 1.1.eth1

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758022571	09_16_2025_17_06_11	5	0	0	5000000	5000000	MTU	MTU	MTU	MTU	-1	1.1.eth1	428808	39173131	1 Gbps	1 Gbps	NaN	NaN	NaN	00:03:2d:3f:7d:03	[channel: 1]	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.1.sta2000

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758022571	09_16_2025_17_06_11	5	0	0	5000000	5000000	MTU	MTU	MTU	MTU	-1	1.1.sta2000	14300483	190250	144.4 Mbps	26 Mbps	-57 dBm	94:A6:7E:74:26:22	802.11bgn-AC 20 2x2	04:f0:21:89:74:f4	11	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.1.sta2001

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758022571	09_16_2025_17_06_11	5	0	0	5000000	5000000	MTU	MTU	MTU	MTU	-1	1.1.sta2001	10716099	189284	144.4 Mbps	26 Mbps	-57 dBm	94:A6:7E:74:26:22	802.11bgn-AC 20 2x2	04:f0:21:89:c6:f4	11	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.1.sta2002

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758022571	09_16_2025_17_06_11	5	0	0	5000000	5000000	MTU	MTU	MTU	MTU	-1	1.1.sta2002	10553187	158642	144.4 Mbps	19.5 Mbps	-57 dBm	94:A6:7E:74:26:22	802.11bgn-AC 20 2x2	04:f0:21:89:c3:f4	11	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.1.sta2003

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758022571	09_16_2025_17_06_11	5	0	0	5000000	5000000	MTU	MTU	MTU	MTU	-1	1.1.sta2003	8068556	130988	144.4 Mbps	39 Mbps	-58 dBm	94:A6:7E:74:26:22	802.11bgn-AC 20 2x2	04:f0:21:89:e6:f4	11	0	0	0	0	0	0	0	0	0	0

Layer 3 Cx Traffic Last Reporting Interval 1.1.sta2004

Time epoch	Time	Total-Station-Count	UL-Min-Requested	UL-Max-Requested	DL-Min-Requested	DL-Max-Requested	UL-Min-PDU	UL-Max-PDU	DL-Min-PDU	DL-Max-PDU	Attenuation	Name	Rx-Bps	Tx-Bps	Rx-Link-Rate	Tx-Link-Rate	RSSI	AP	Mode	MAC	Channel	Rx-Latency	Rx-Jitter	Ul-Rx-Goodput-bps	Ul-Rx-Rate-ll	Ul-Rx-Pkts-ll	Ul-Rx-Drop_Percent	Dl-Rx-Goodput-bps	Dl-Rx-Rate-ll	Dl-Rx-Pkts-ll	DL-Rx-Drop-Percent
1758022571	09_16_2025_17_06_11	5	0	0	5000000	5000000	MTU	MTU	MTU	MTU	-1	1.1.sta2004	9297448	185214	144.4 Mbps	39 Mbps	-57 dBm	94:A6:7E:74:26:22	802.11bgn-AC 20 2x2	04:f0:21:89:41:f4	11	0	0	0	0	0	0	0	0	0	0