


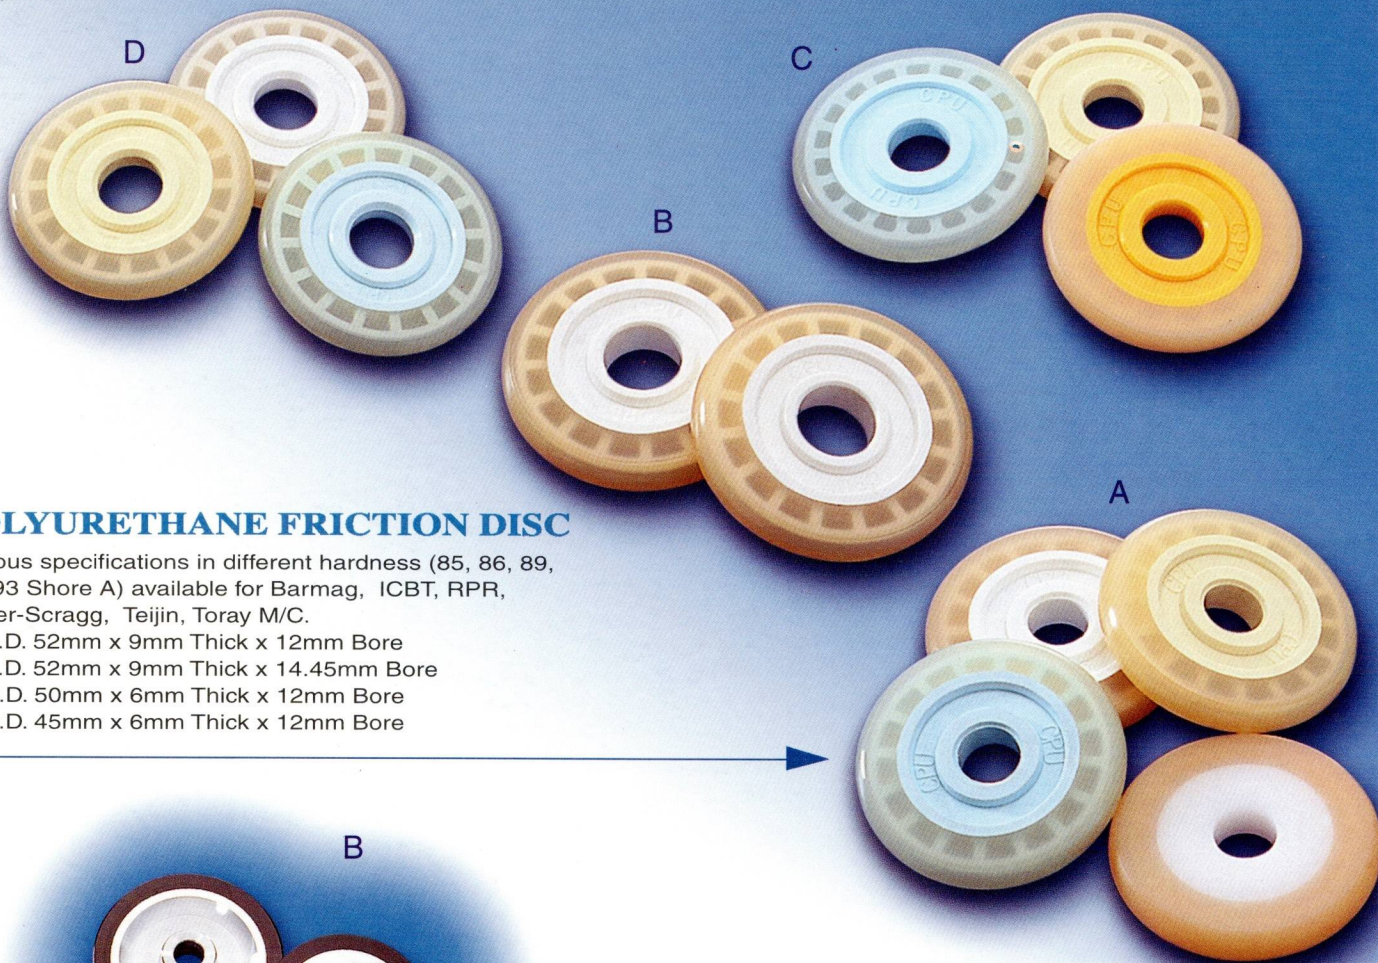

POLYURETHANE FRICTION DISC

Various specifications in different hardness (85, 86, 89, 92, 93 Shore A) available for Barmag, ICBT, RPR, Rieter-Scragg, Teijin, Toray M/C.

A: O.D. 52mm x 9mm Thick x 12mm Bore

B: O.D. 52mm x 9mm Thick x 14.45mm Bore

C: O.D. 50mm x 6mm Thick x 12mm Bore

D: O.D. 45mm x 6mm Thick x 12mm Bore



SUPPORTING ROLLER FOR OPEN-END ROTOR SPINNING

A: for Schlafhorst SE 7, SE8, SE9, SE10

B: for Ingolstadt RU11 (4602,4603), RU04, RU14, R1, R20

PU FRICTION WHEEL

A: CPU3422V ... O.D. 34.2 x (22+4)mm

B: CPU3826NC ... O.D. 38 x 26mm

C: CPU3828NC ... O.D. 38 x 28mm



CPU

CHINA POLYURETHANE CORPORATION

No. 6-8, Lane 661, Sec. 5, Chung Hsing Rd.,
San Chung, Taipei Hsien, Taiwan

Tel: 886-2-2995 5746

Fax: 886-2-2995 7986