Exp No: 09 Implementation of subnetting in
13.09.24 Cisco Packet Tracer.

Aim:


Implementation of subnetting in CISCO packet tracer simulator.

Creating a network topology:

To create a network topology in packet trace, select "new button in top, then select network & generic

Adding the devices:

To add a device, select the device from bottom left and drag it.

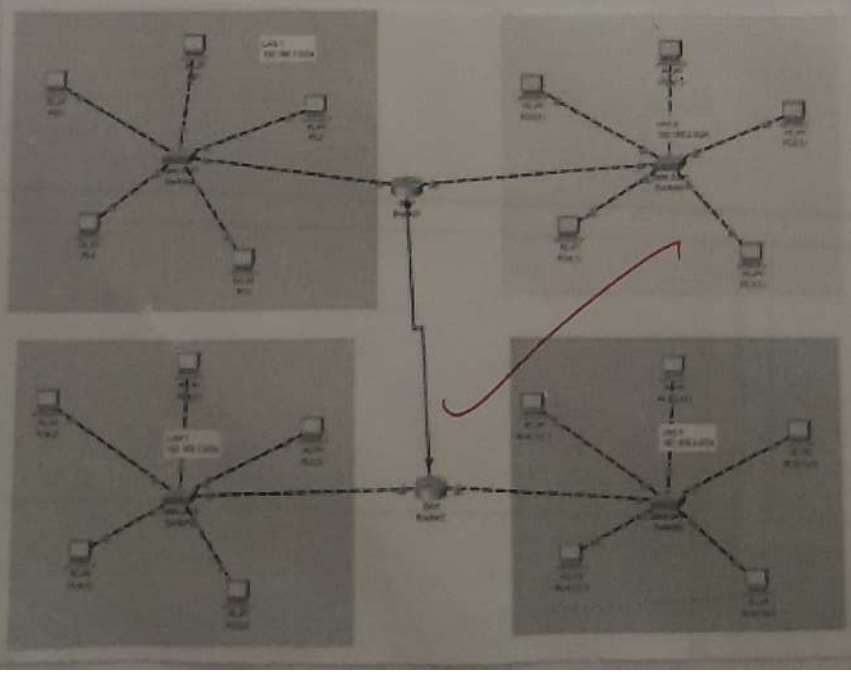

Configuring the devices:-

Right click on routers and select "CLI"

This will open by configuring the routers

#enable

configure terminal

interface fast ethernet 0/0

#ip addres {ip address} {subnet mask}

no shutdown

exit

interface fast Ethernet 0/1

ip addres {ip address} {subnet mask}

no shutdown

exit.

Testing the network:

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num
	Successful	PC4(2)	Router2	ICMP		0.000	N	12
	Successful	PC4(2)	PC2(1)(1)	ICMP		0.000	N	13
	Successful	PC0	Router0	ICMP		0.000	N	14

Result:-

The implementation of subnetting in CISCO packet tracer was succesfully