Exp No: 11 Configure a simple internetwork using routers in CISCO Packet Tracer.
21.09.26

Aim:

To design and configure a simple internetwork using a router in CISCO Packet tracer.

Procedure:-


1. Open CISCO Packet Tracer and create a new topology.
2. Add 2 routers, switches and 3-4 PCs for each network.
3. Connect PCs to switches to routers using ethernet cables.
4. Assign static IP address and subnet
5. Configure IP address on router interface

Code:-

```
enable
configure terminal
interface fastEthernet 0/0
ip address <IP> <subnet mask>
no shutdown
exit
```

6. Configure default gateway of each PC with IP address of connected router interface.

7. Use simulation mode and send a PDU from one network to another.

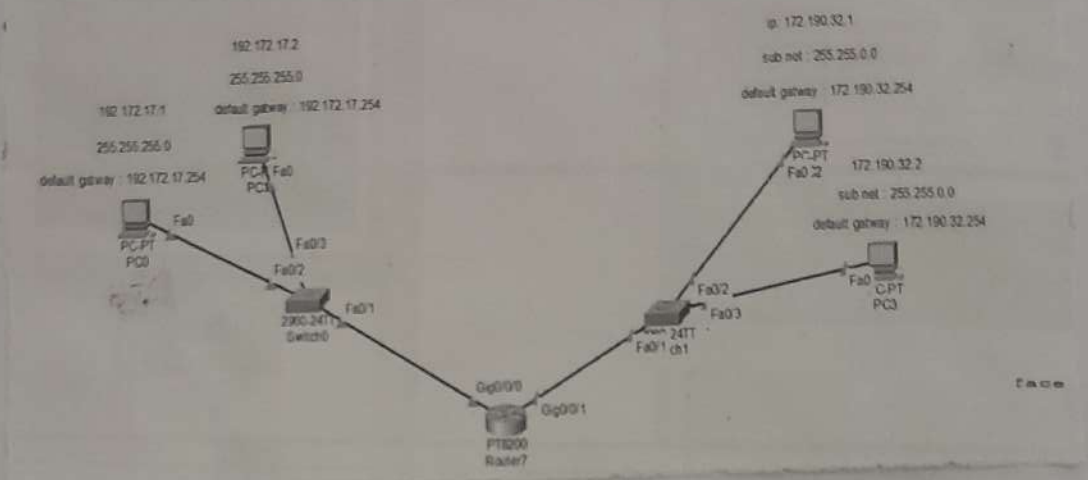


```
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
Router(config)#interface GigabitEthernet0/0/0
Router(config-if)# ip address 192.172.17.254 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router(config)#
Router(config)#interface GigabitEthernet0/0/1
Router(config-if)# ip address 172.190.32.254 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#
```

Result:-

The simple subnetwork was successfully designed and configuration in CISCO Packet tracer and communication between networks.