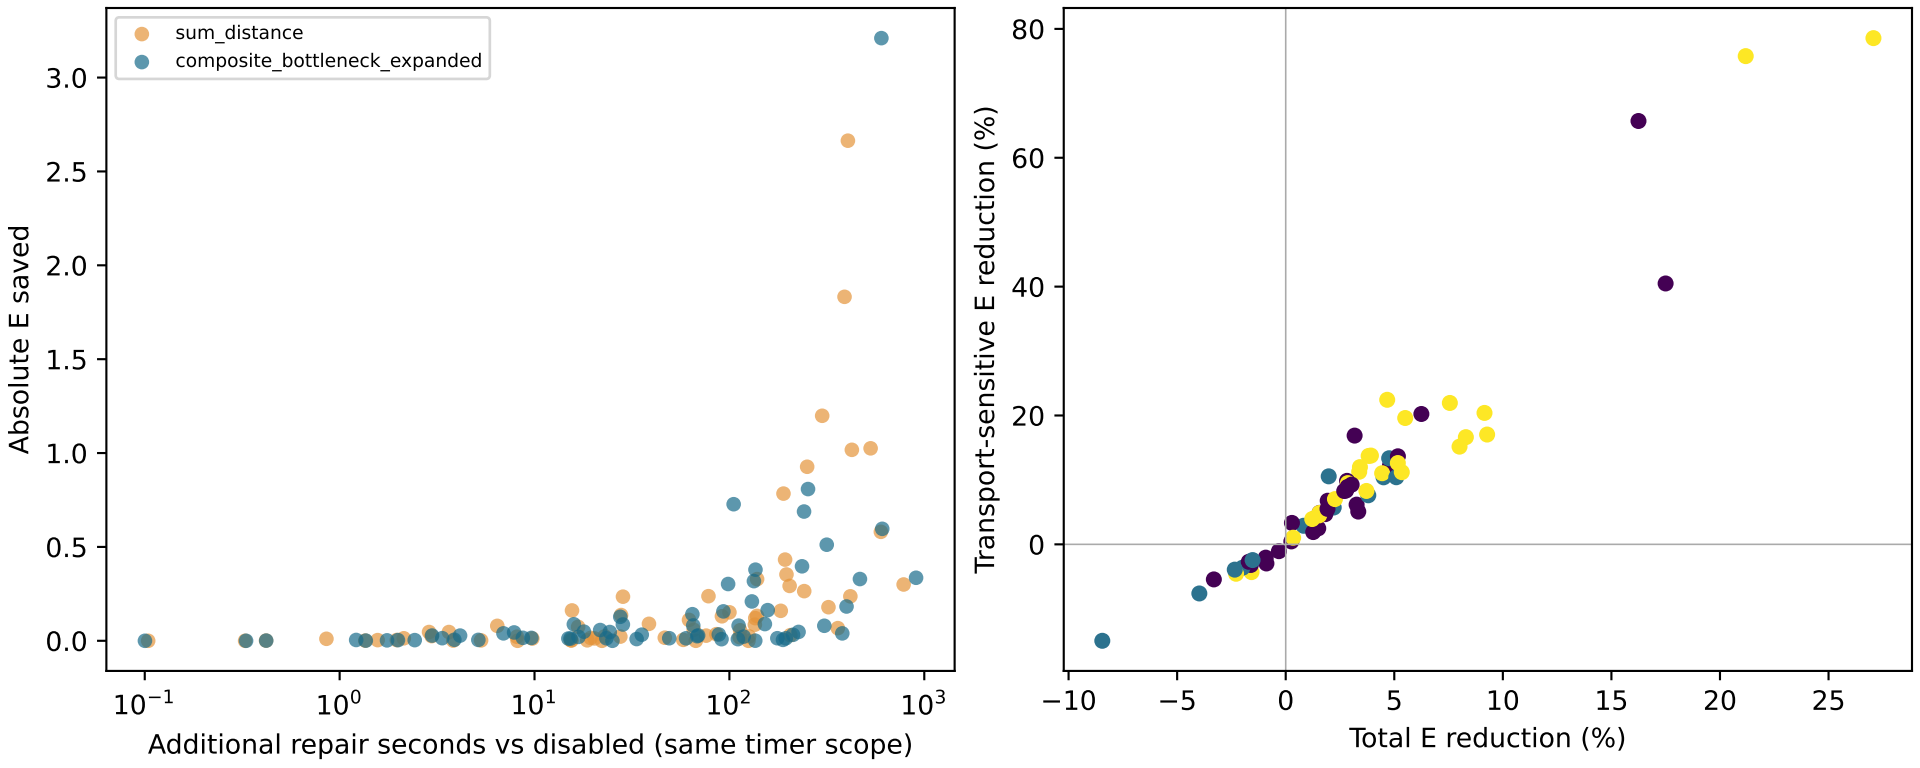
sum_distance
composite_bottleneck_expanded
Absolute E saved
3.0
2.5
2.0
1.5
1.0
0.5
0.0
10^{-1}
10^{0}
10^{1}
10^{2}
10^{3}
Additional repair seconds vs disabled (same timer scope)
Transport-sensitive E reduction (%)
80
60
40
20
0
−10
−5
0
5
10
15
20
25
Total E reduction (%)