




US 20140172125A1

(19) **United States**(12) **Patent Application Publication**  
**Shokooh et al.**(10) **Pub. No.: US 2014/0172125 A1**(43) **Pub. Date: Jun. 19, 2014**(54) **DYNAMIC PARAMETER TUNING USING  
PARTICLE SWARM OPTIMIZATION****Publication Classification**(71) Applicant: **Operation Technology, Inc.**, Irvine, CA  
(US)(72) Inventors: **Farrokh Shokooh**, Laguna Beach, CA  
(US); **Ahmed Yousuf Saber**, Lake  
Forest, CA (US)(73) Assignee: **Operation Technology, Inc.**, Irvine, CA  
(US)(21) Appl. No.: **14/042,539**(22) Filed: **Sep. 30, 2013****Related U.S. Application Data**(60) Provisional application No. 61/707,911, filed on Sep.  
29, 2012.(51) **Int. Cl.****G05B 13/04** (2006.01)(52) **U.S. Cl.**CPC ..... **G05B 13/04** (2013.01)USPC ..... **700/29**

(57)

**ABSTRACT**

Dynamic parameter tuning using particle swarm optimization is disclosed. According to one embodiment, a system for dynamically tuning parameters comprising a control unit; and a system for receiving parameters tuned by the control unit. The control unit receives as input a model selection and definitions, and dynamically tunes a value for each parameter by using a modified particle swarm optimization method. The modified particle swarm optimization method comprises moving particle locations based on a particle's inertia, experience, global knowledge, and a tuning factor. The control unit outputs the dynamically tuned value for each parameter.

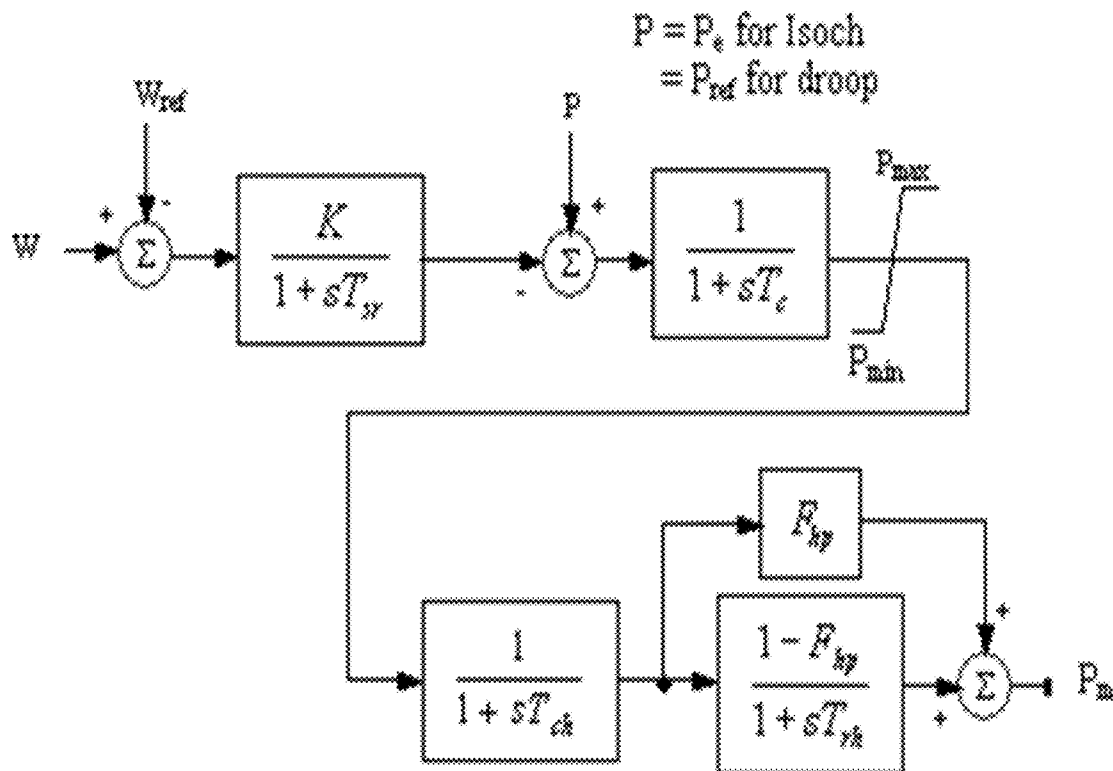

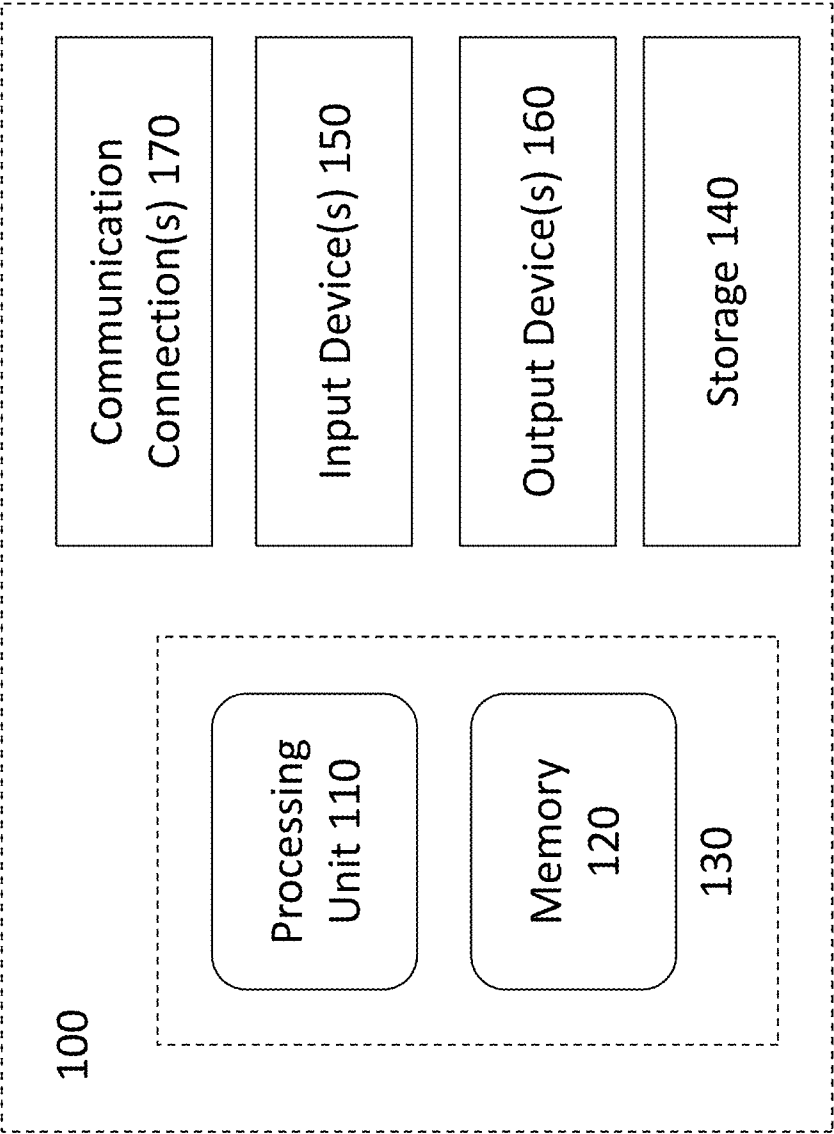


Fig. 1

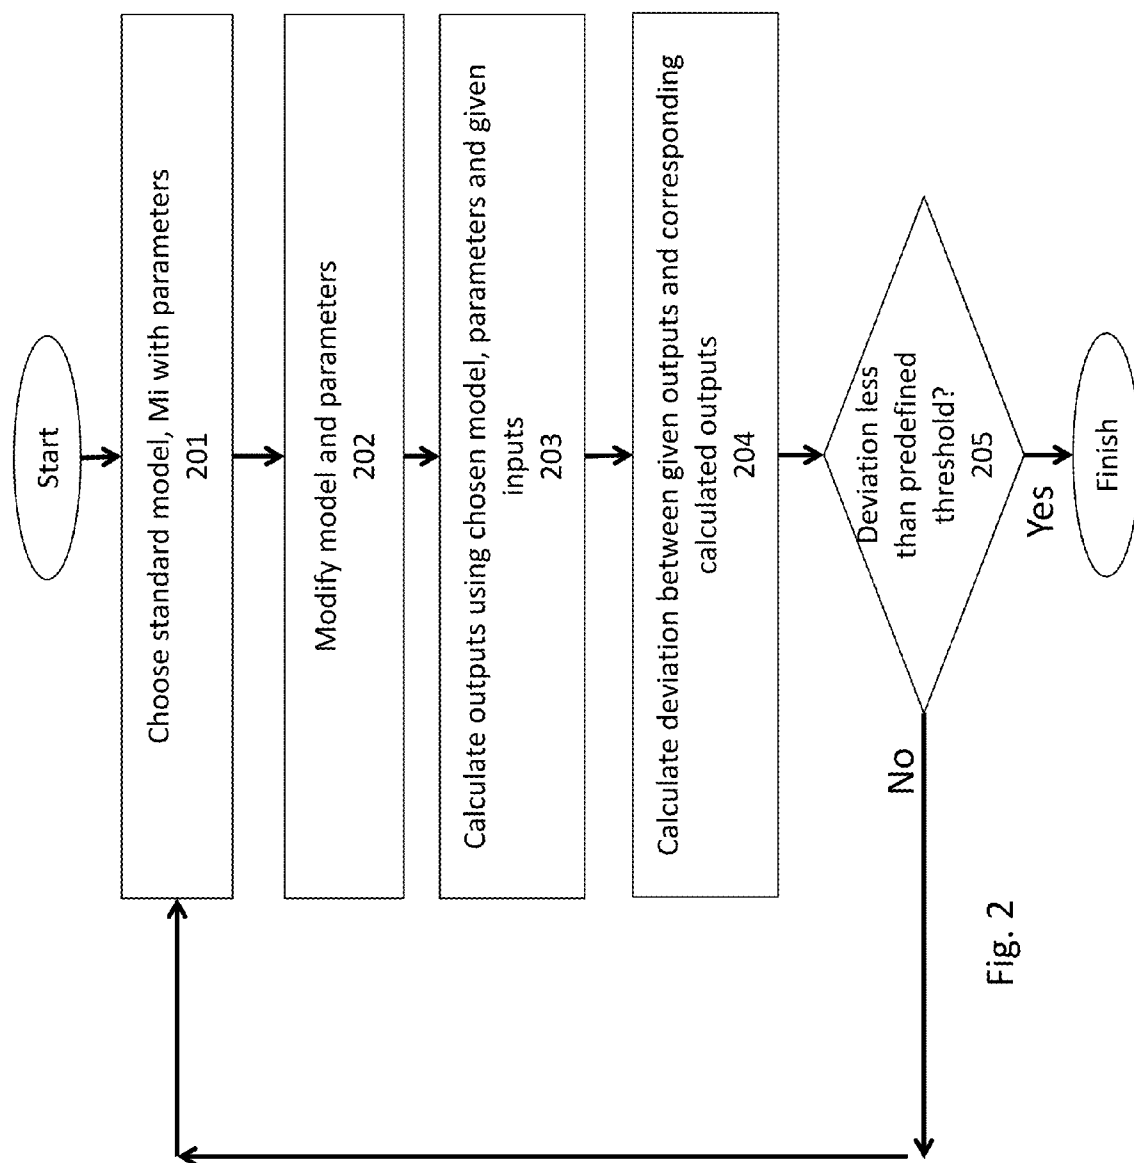


Fig. 2

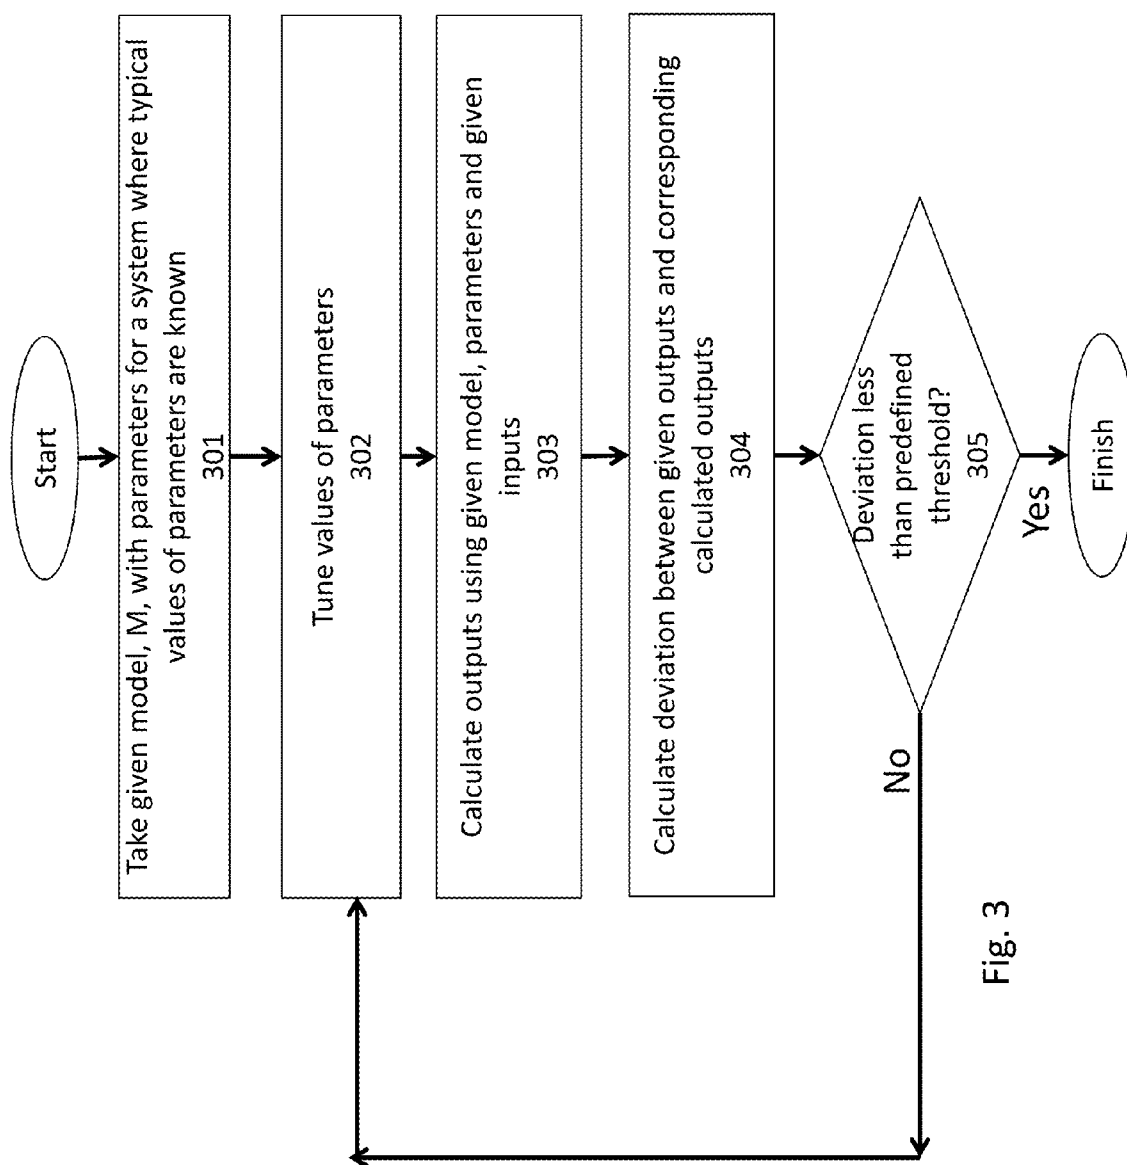


Fig. 3

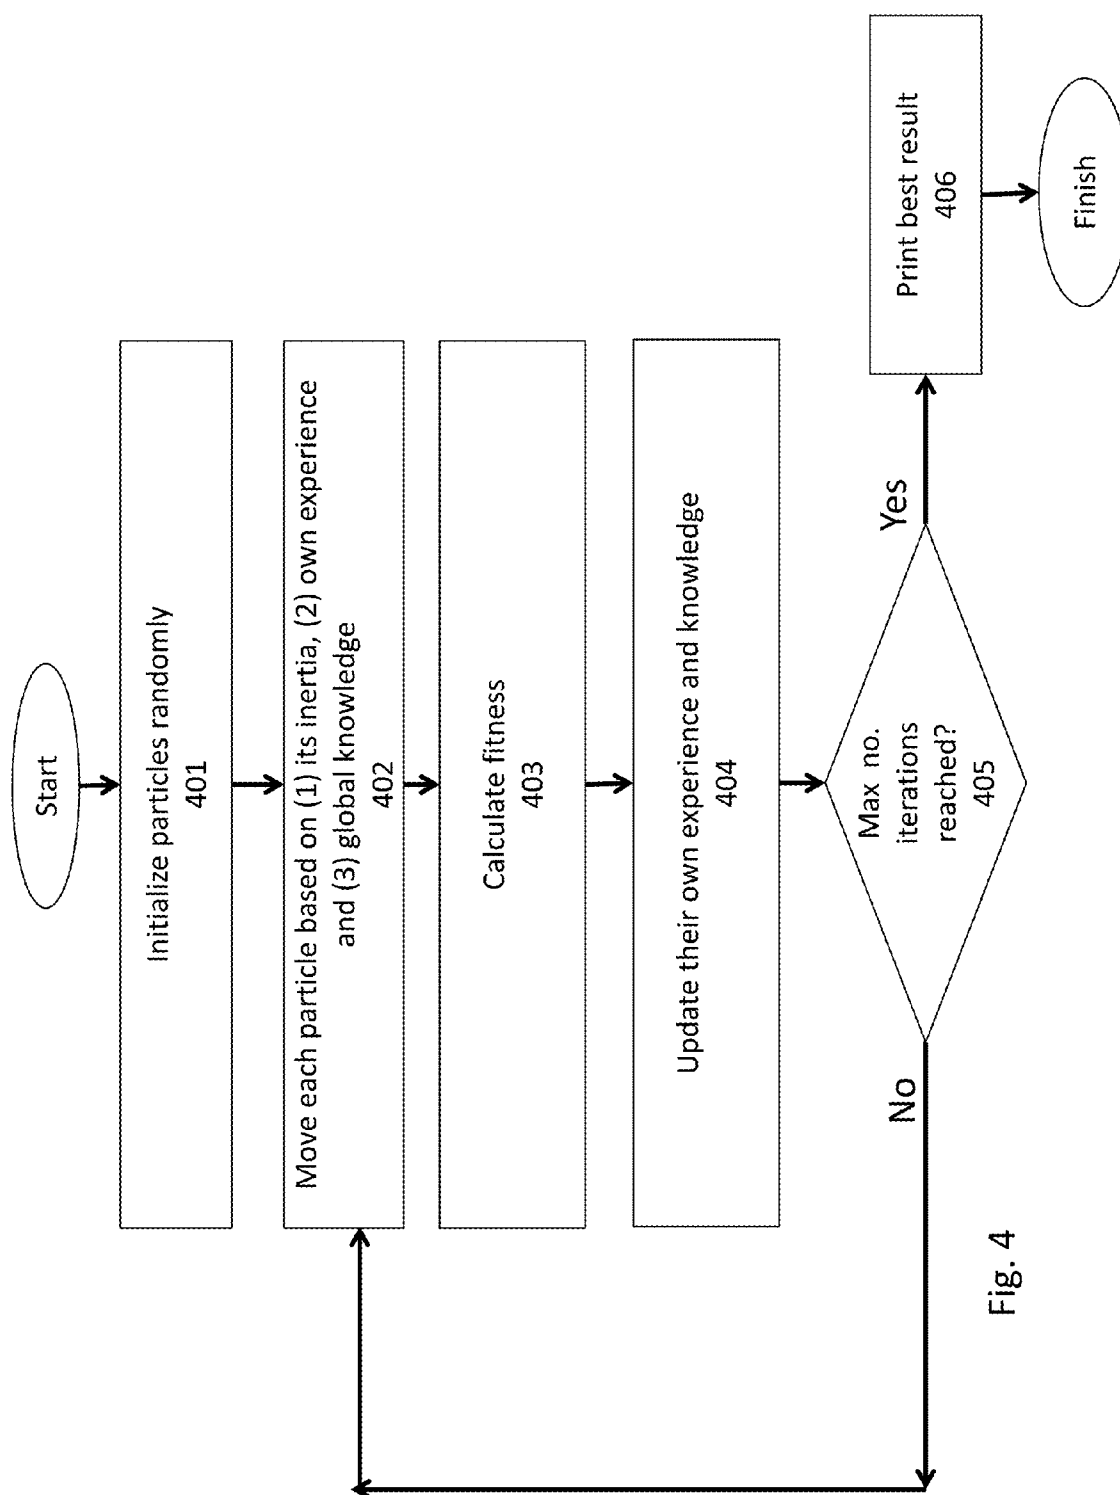


Fig. 4

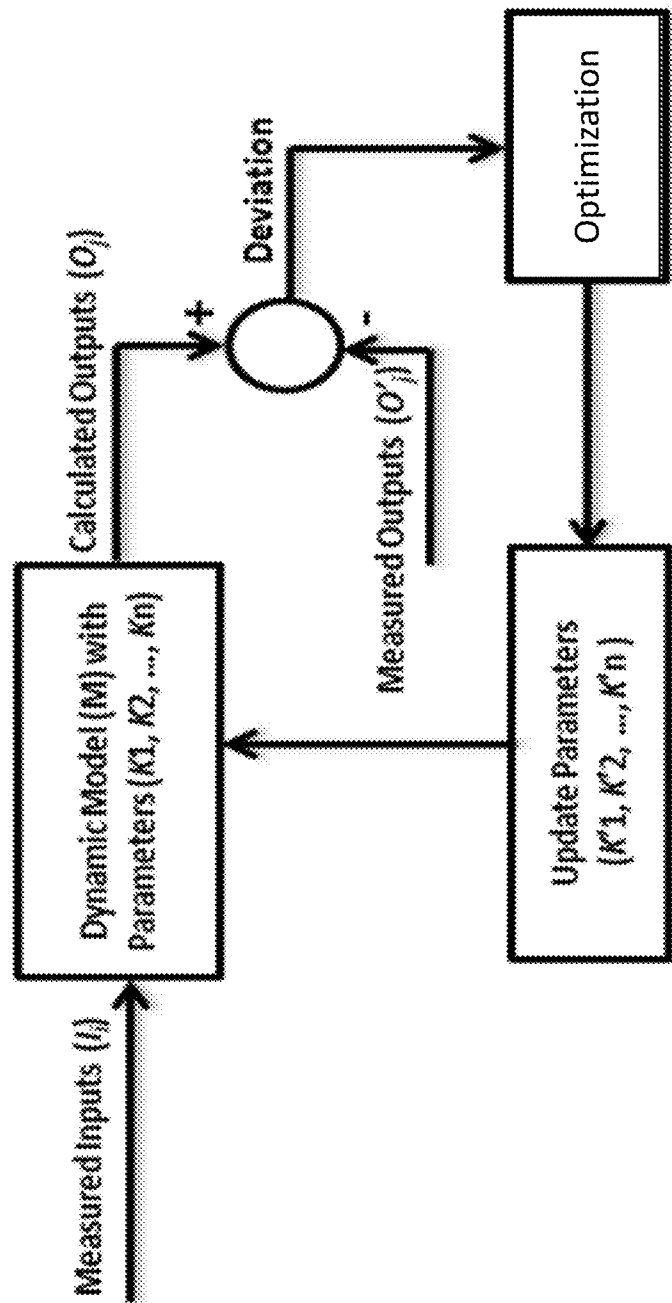


Fig. 5  
Prior Art

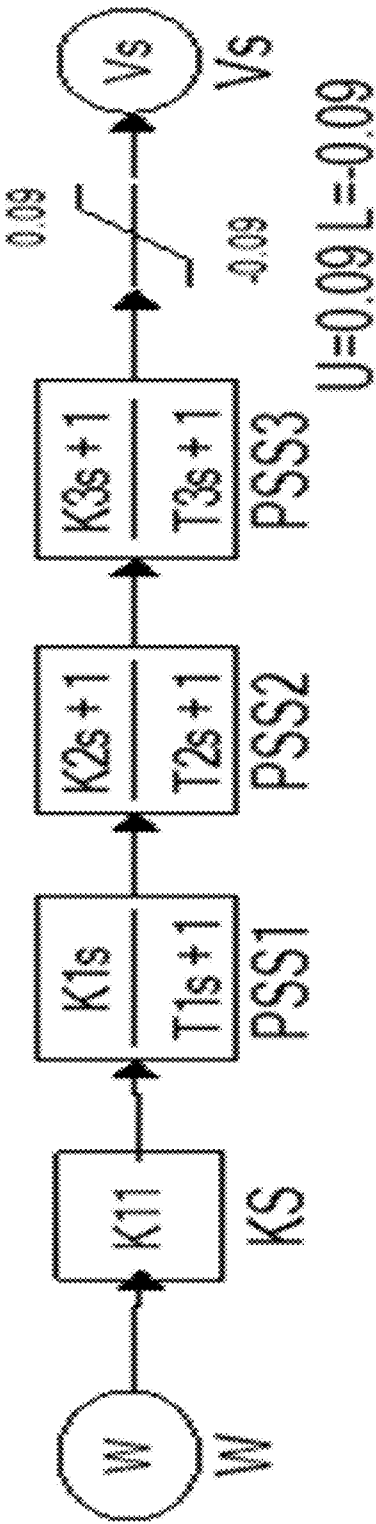


Fig. 6  
Prior Art

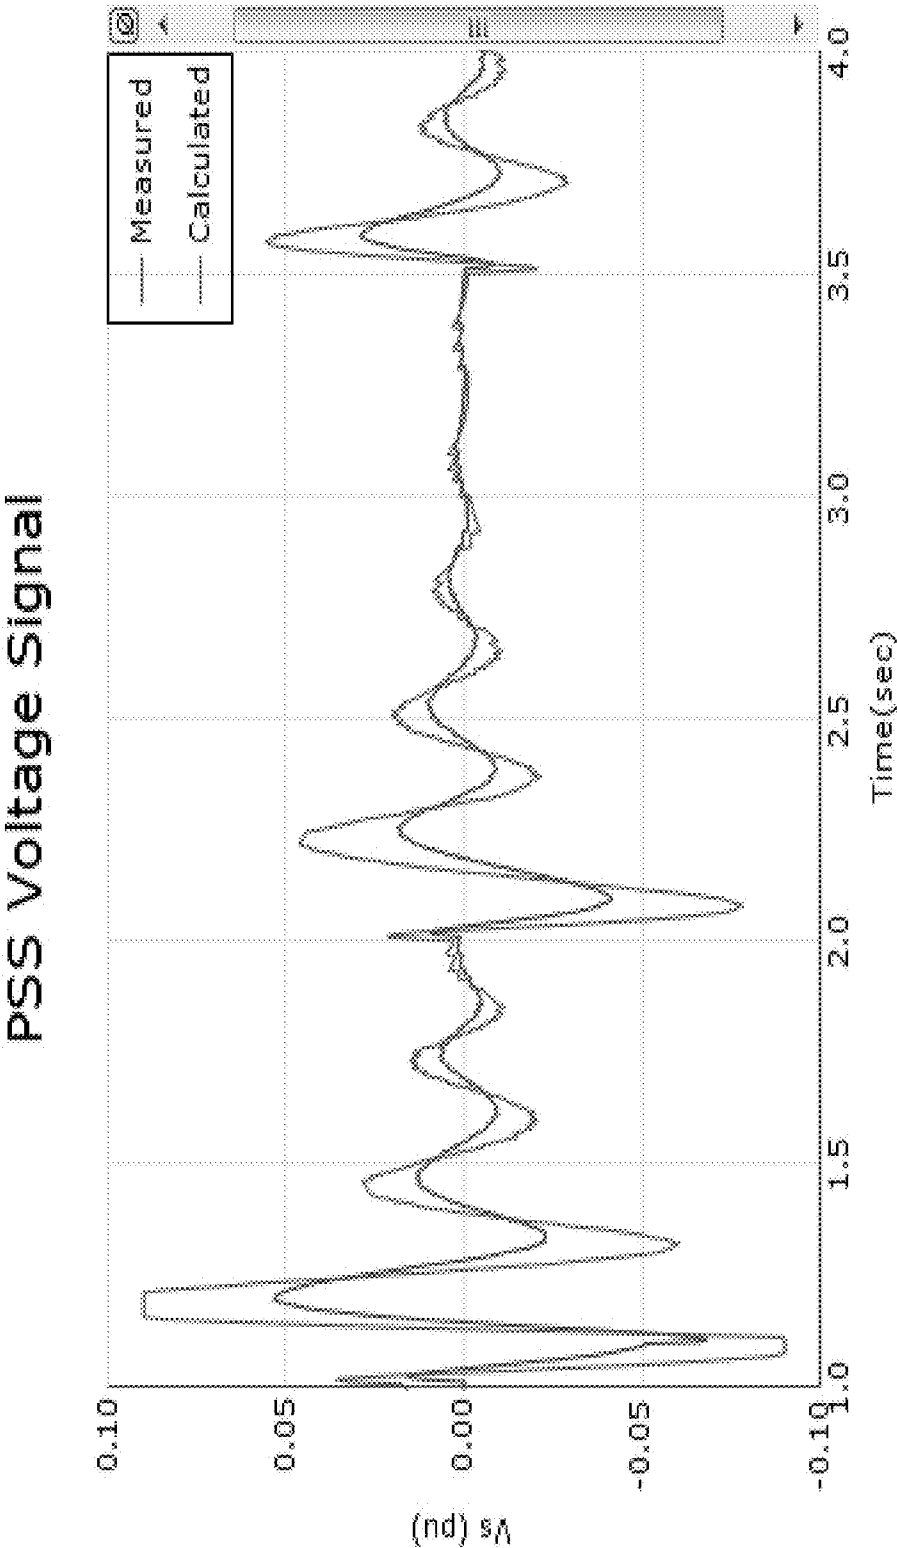
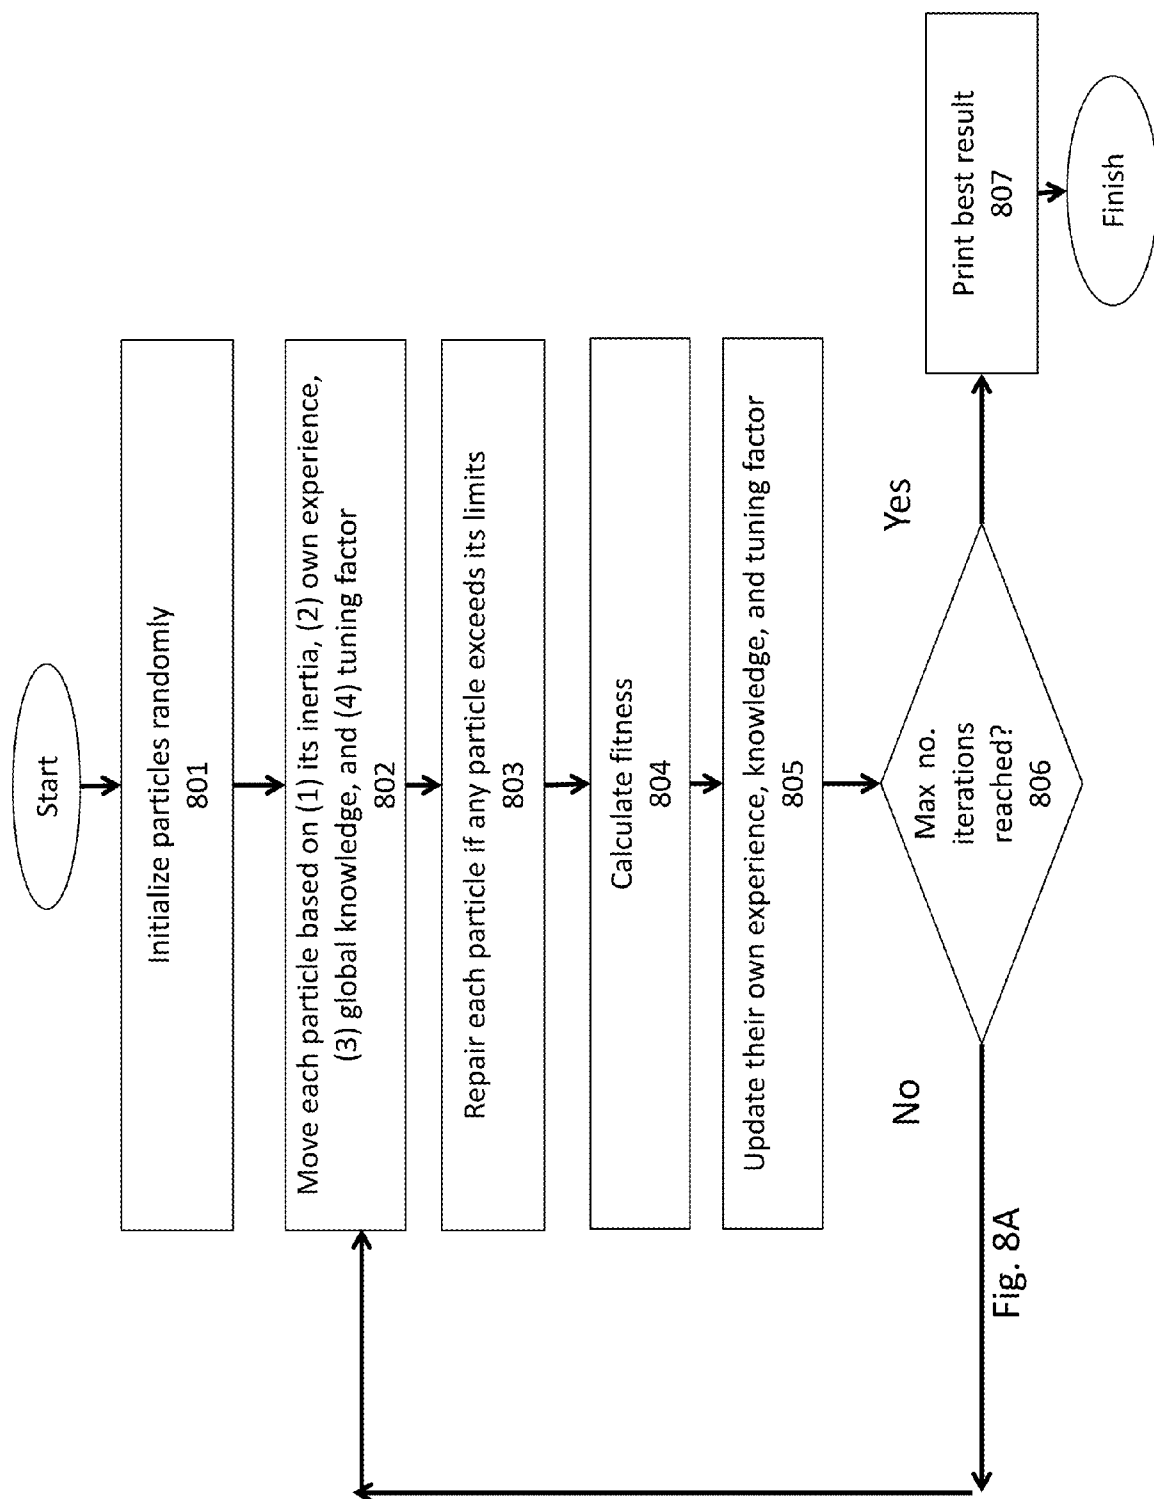


Fig. 7  
Prior Art





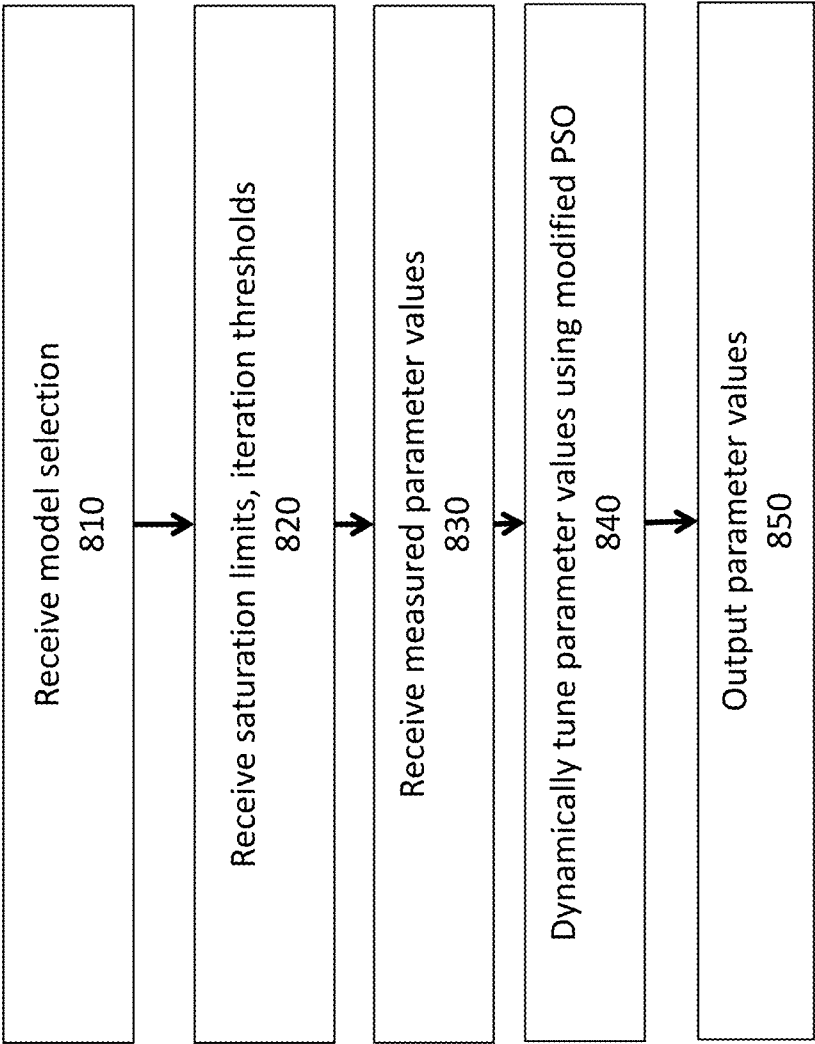
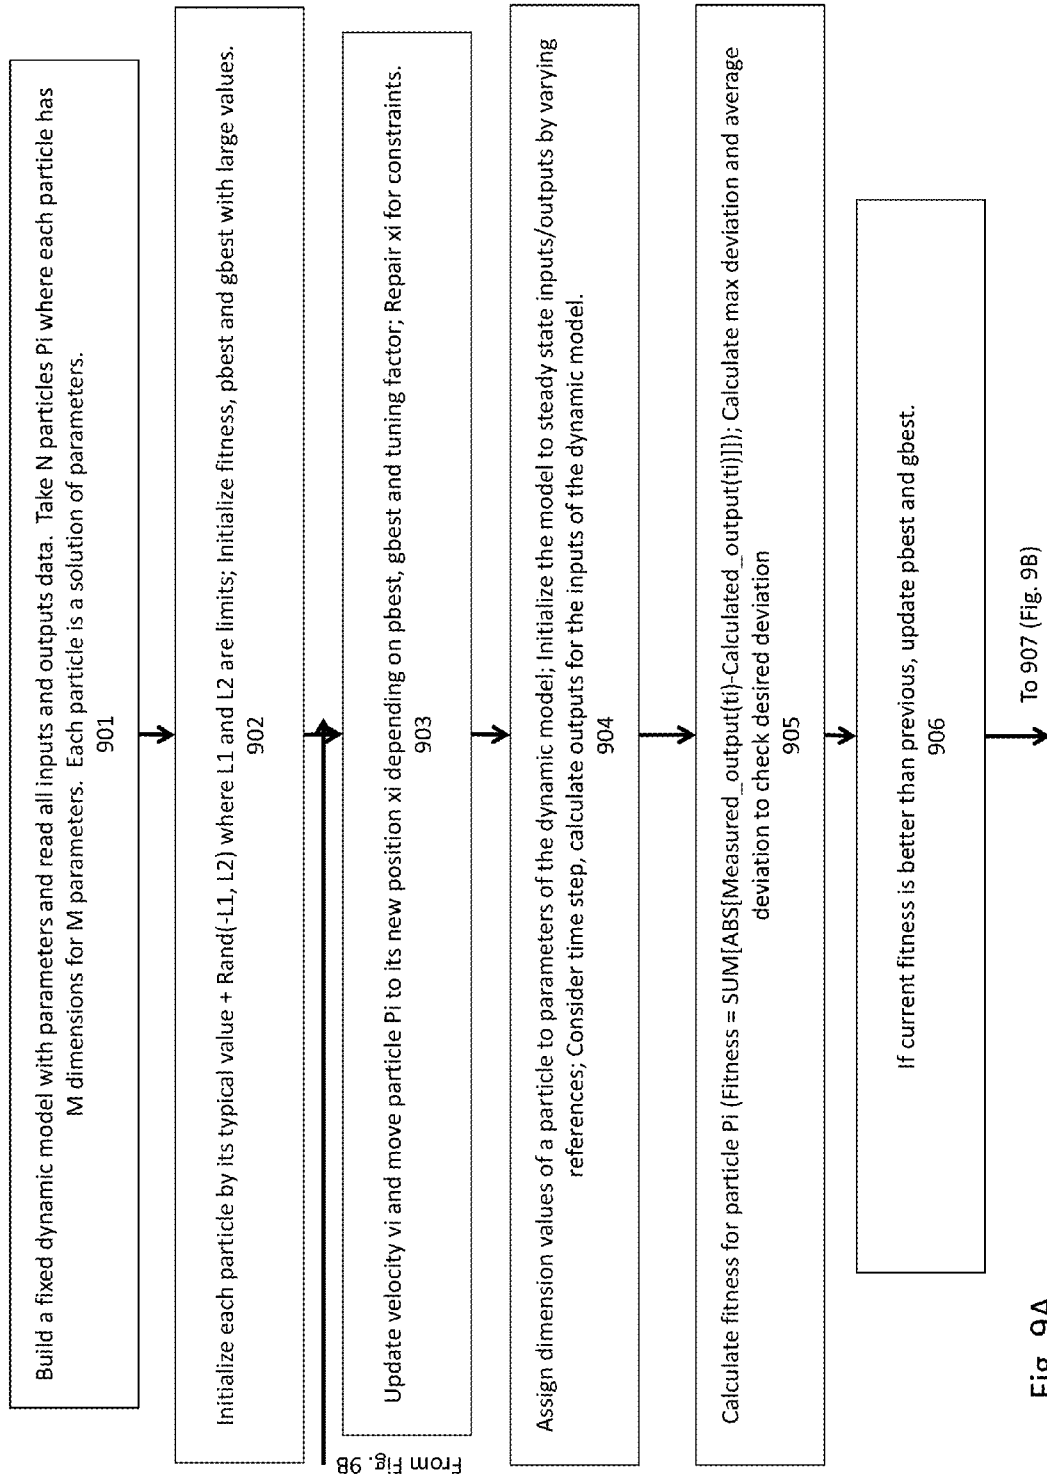


Fig. 8B



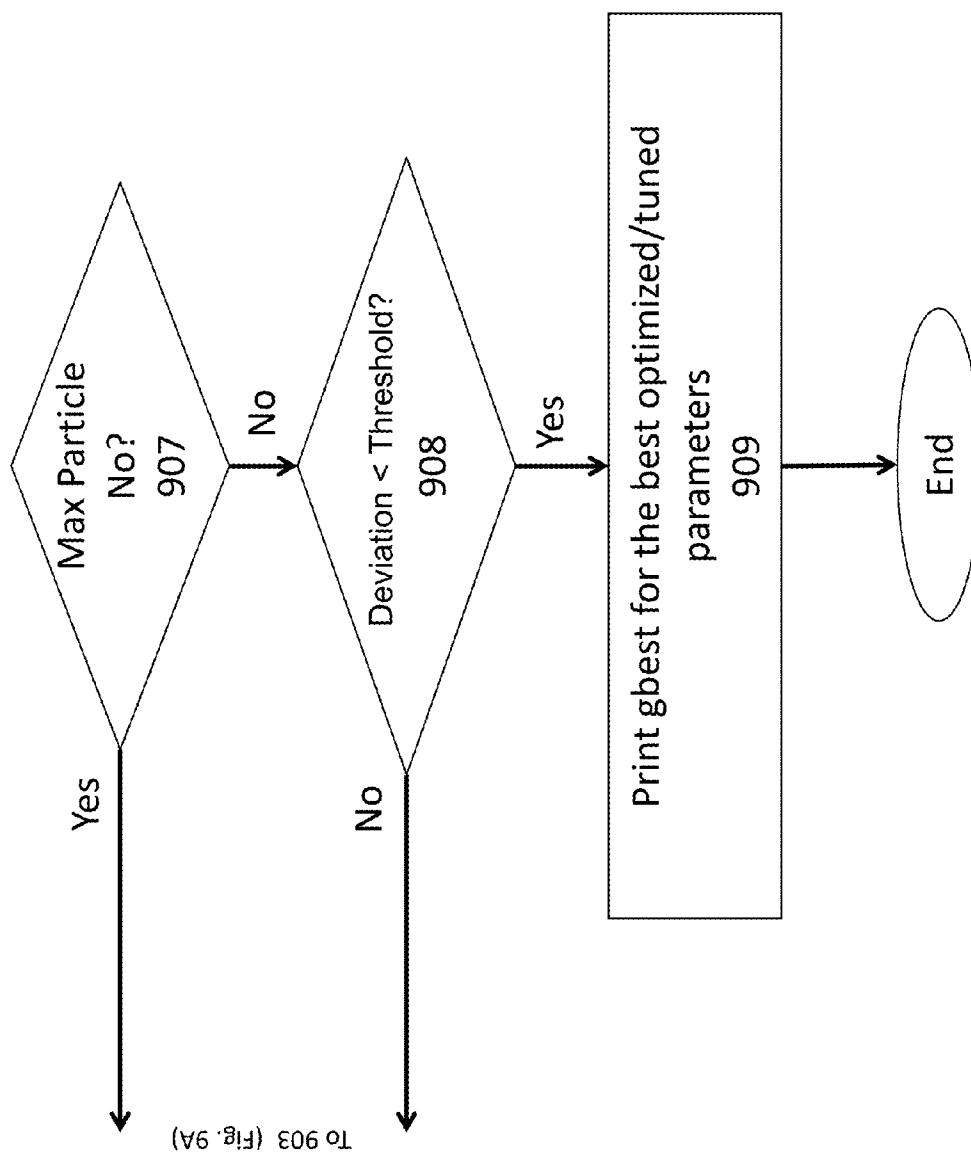


Fig. 9B

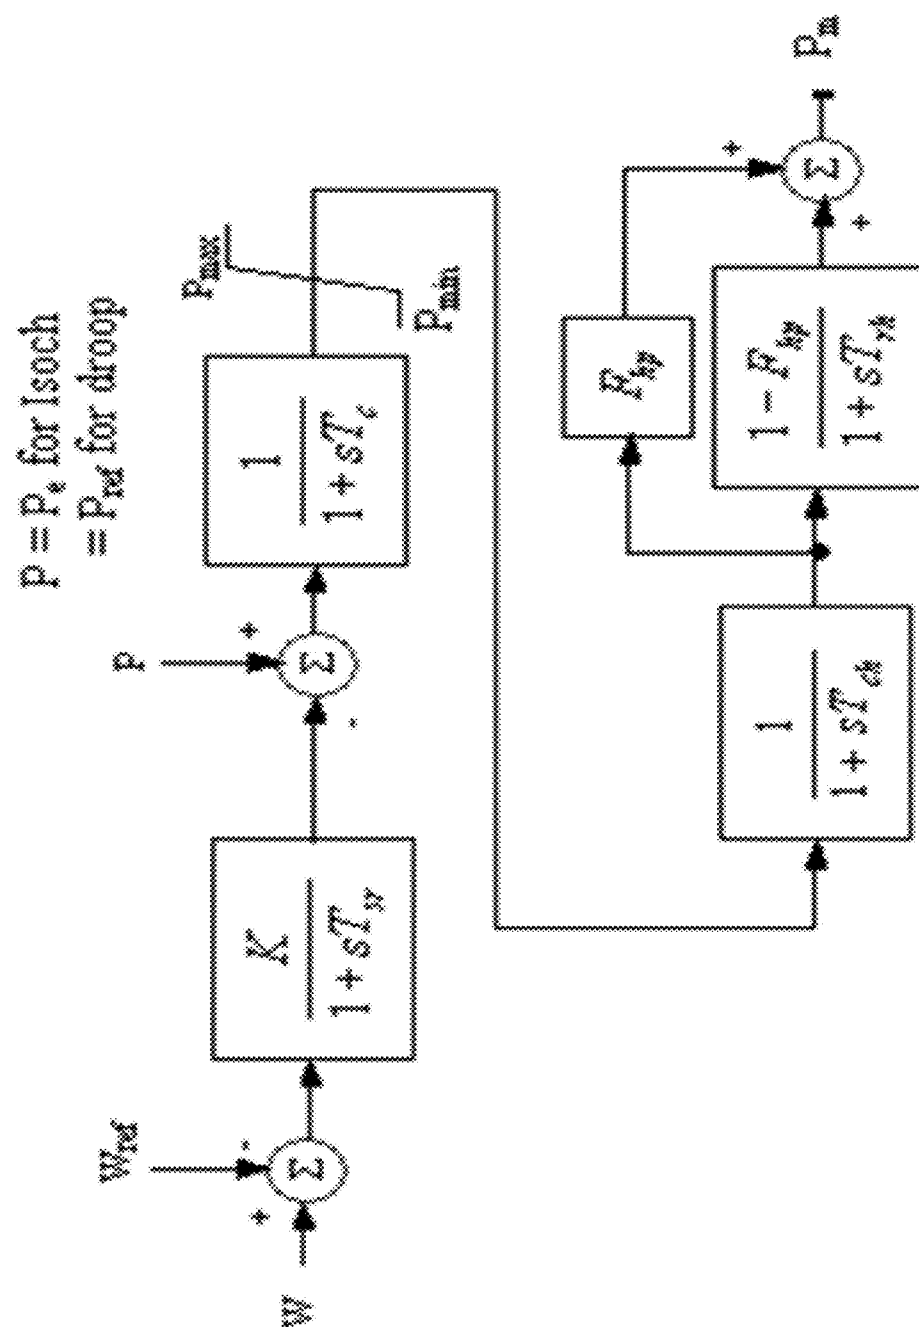


Fig. 10

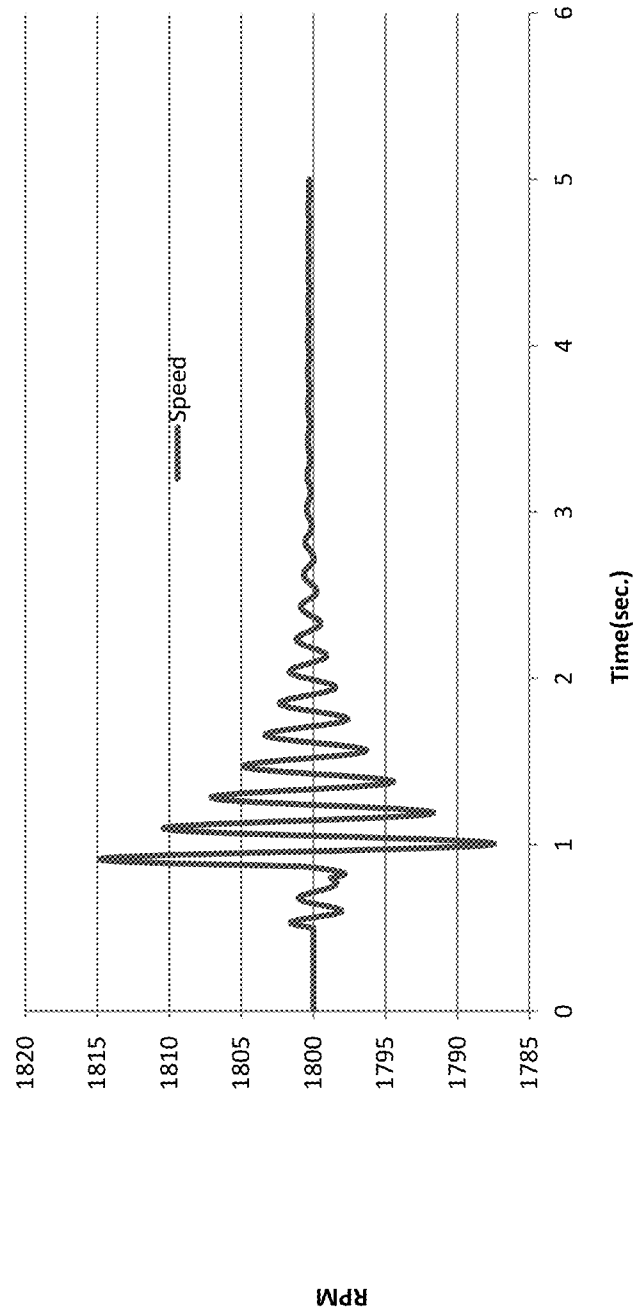


Fig. 11

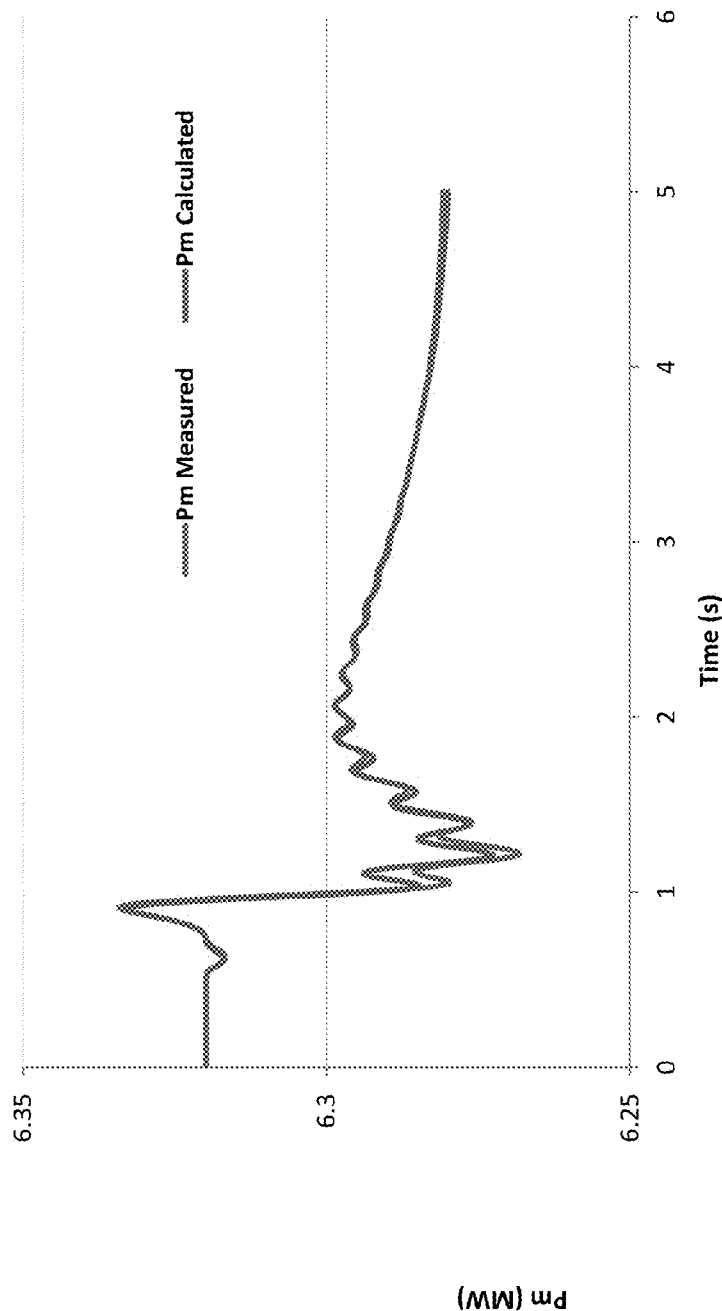


Fig. 12





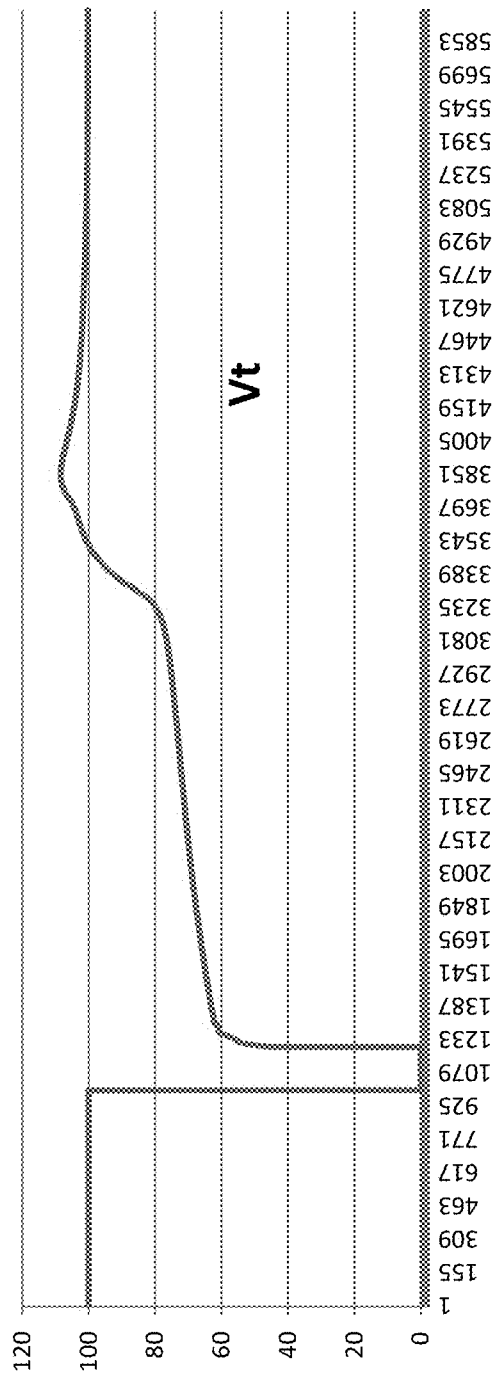


Fig. 14

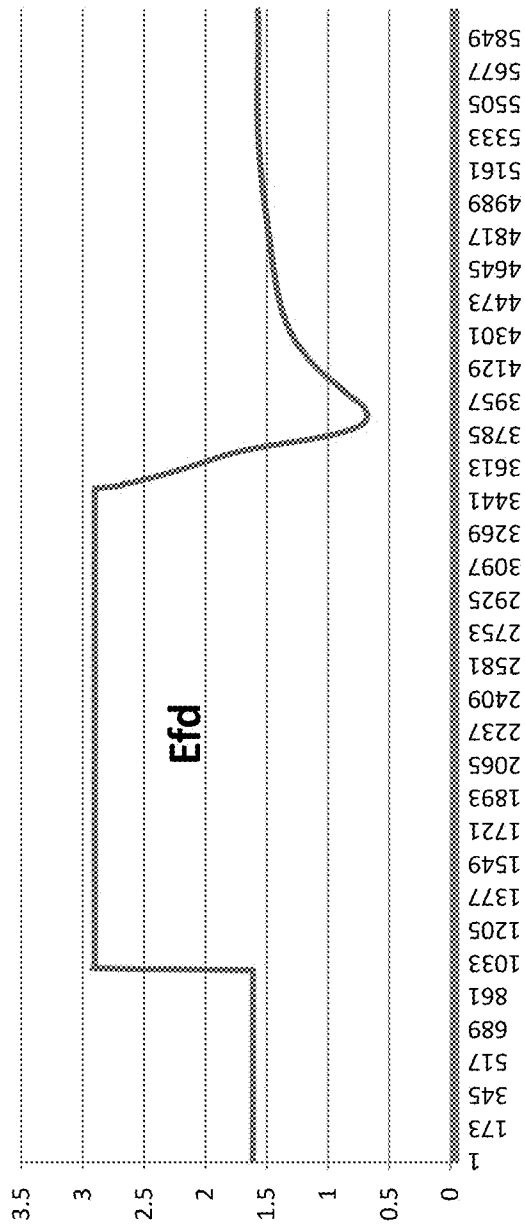


Fig. 15

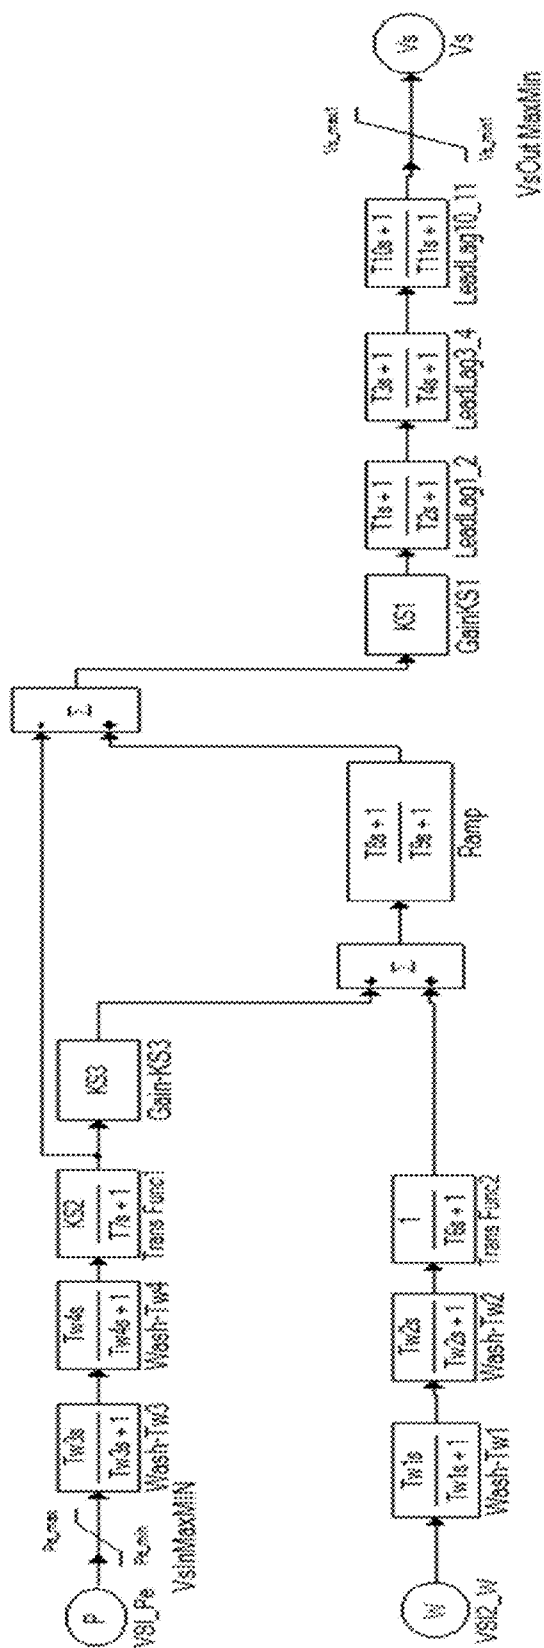


Fig. 16

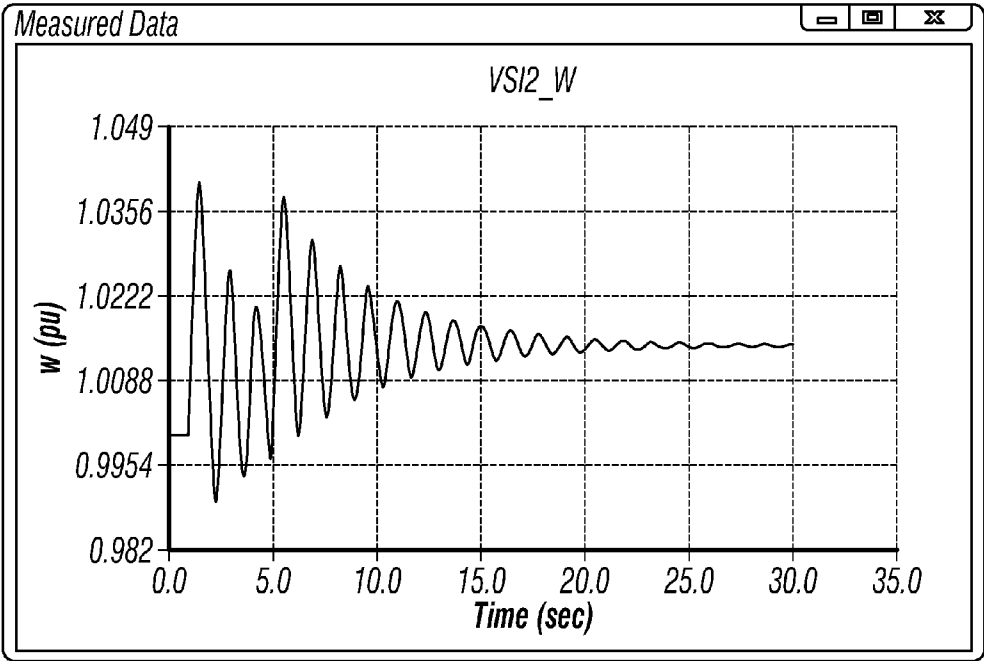


FIG. 17A

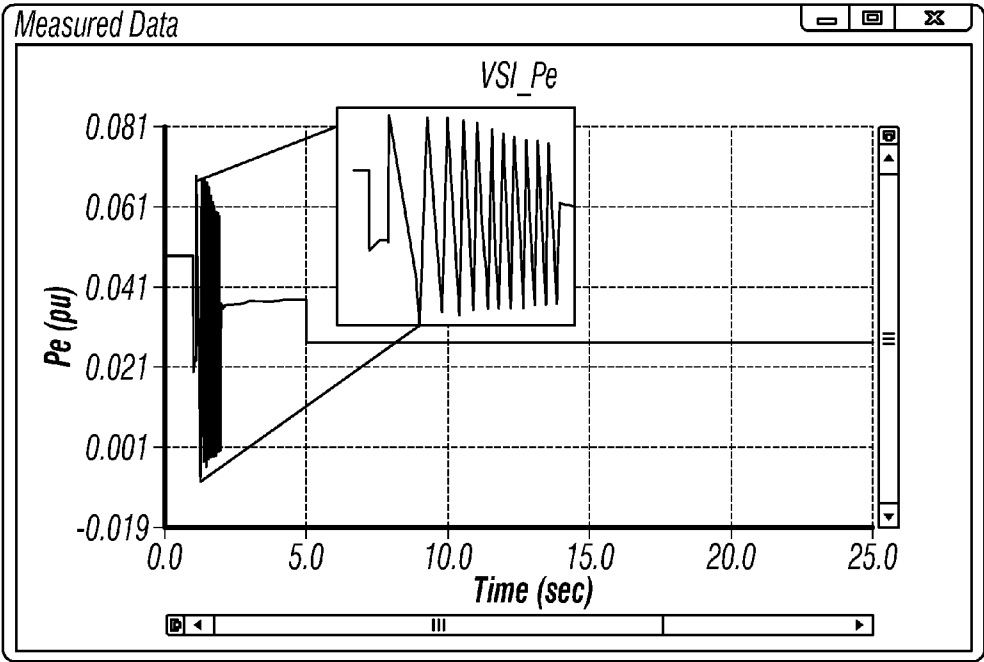


FIG. 17B

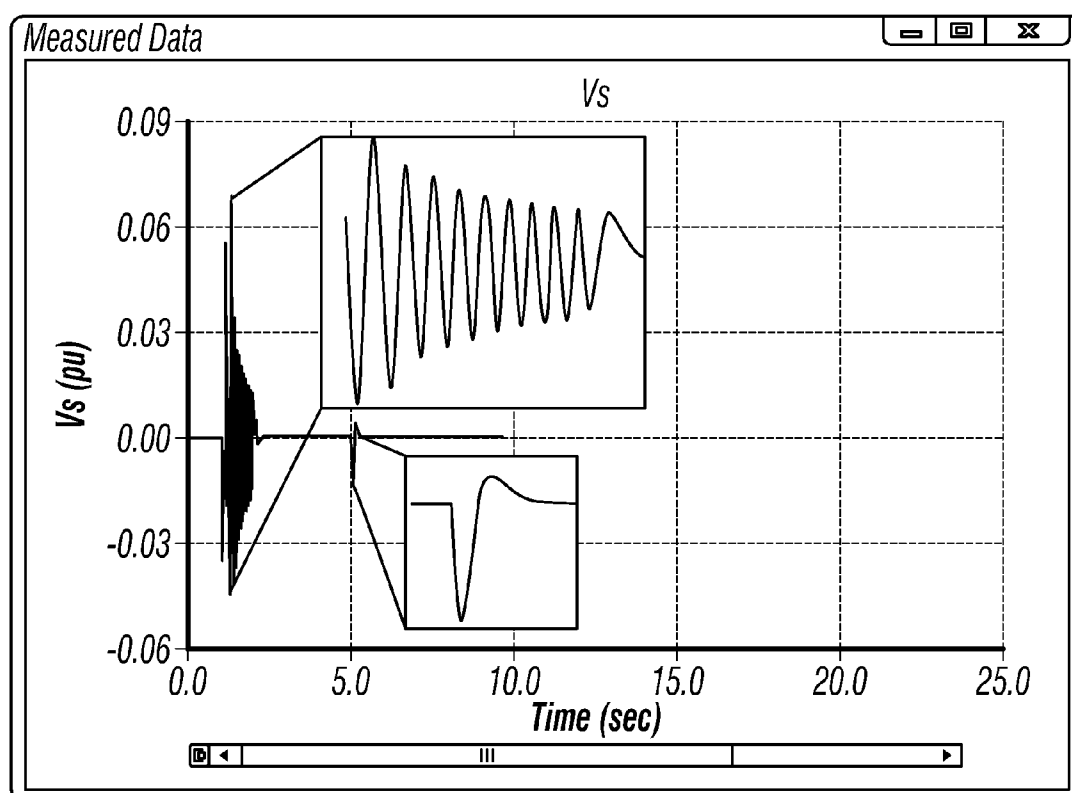


FIG. 17C

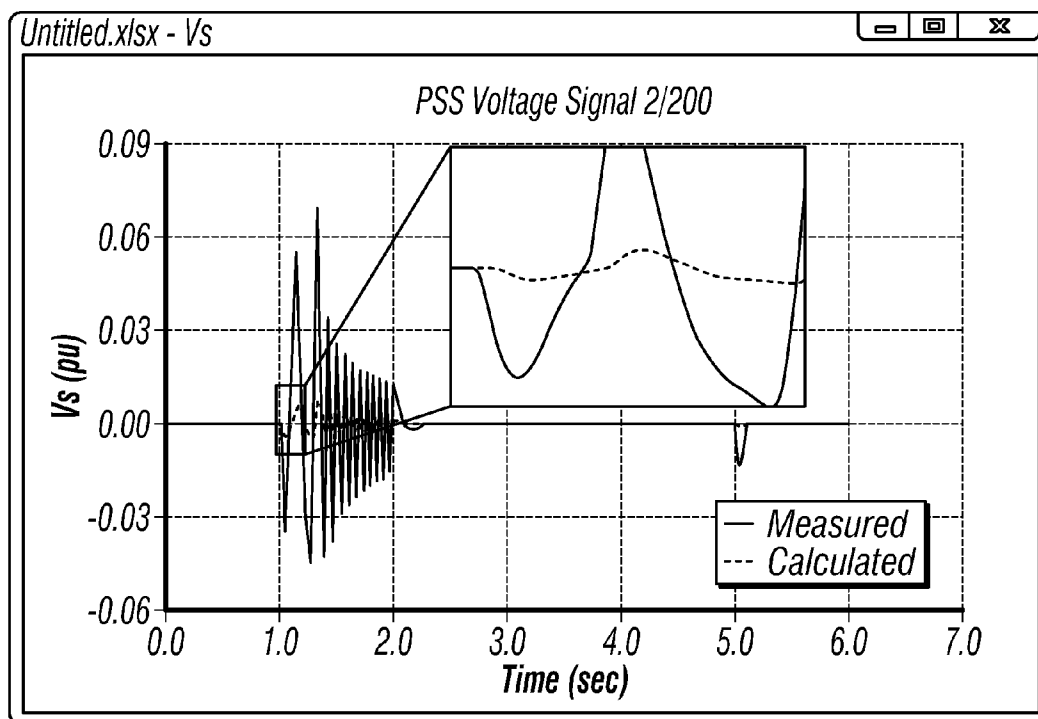


FIG. 18A

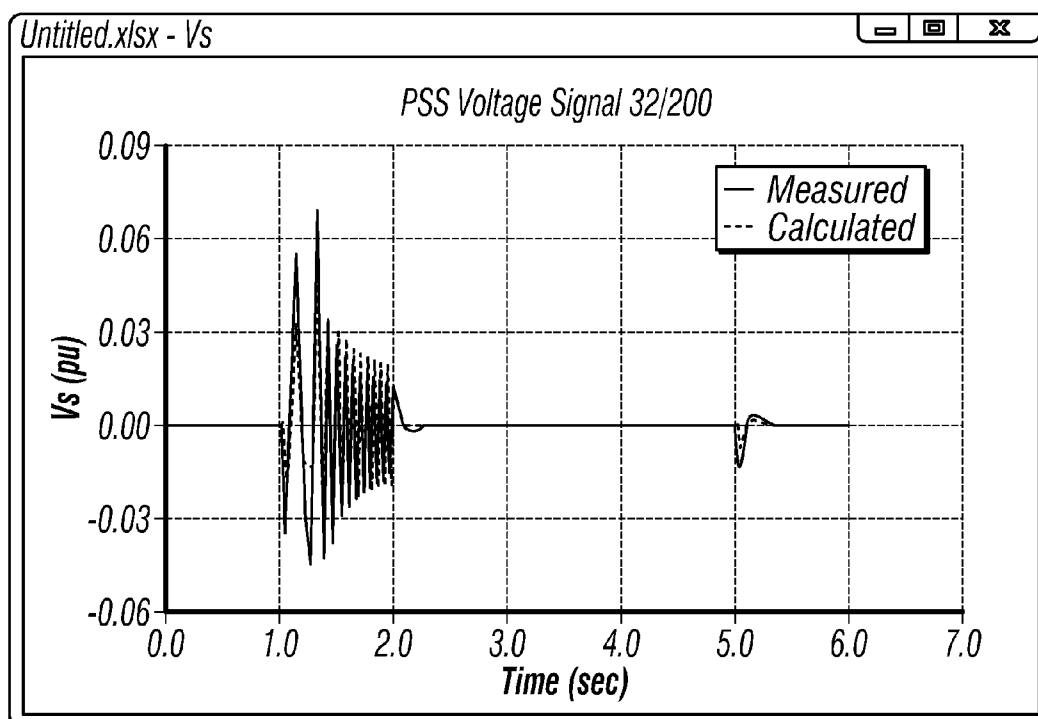


FIG. 18B

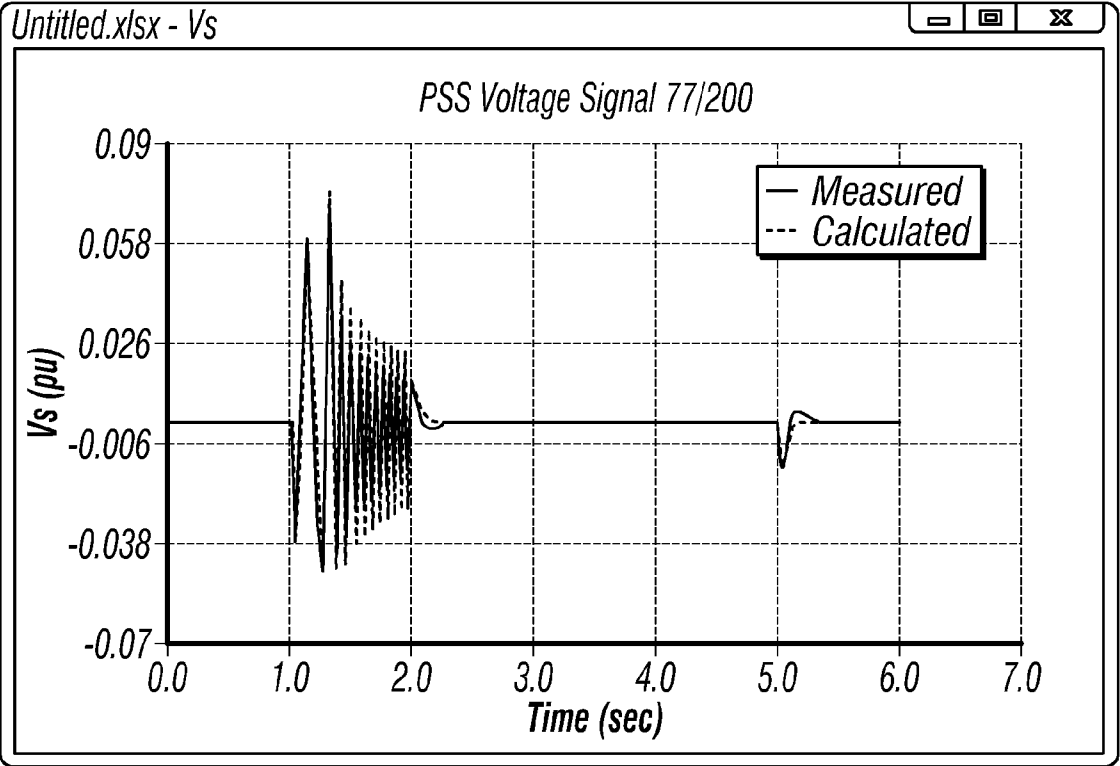


FIG. 18C

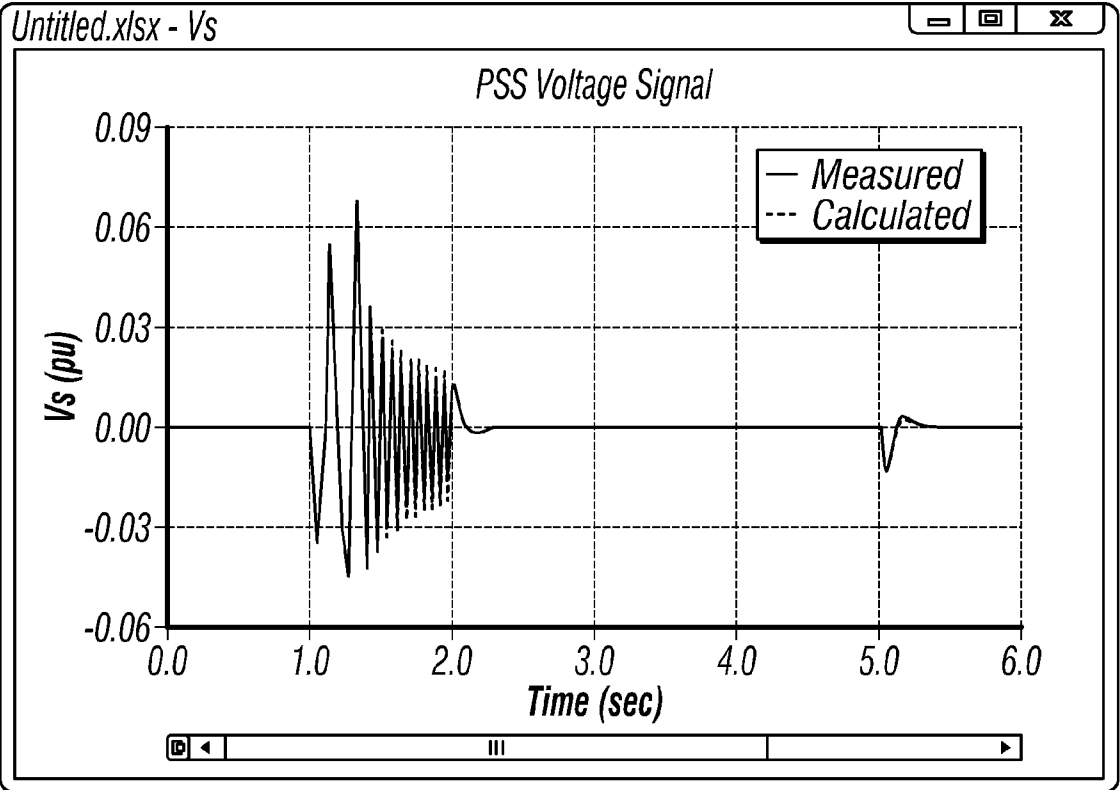


FIG. 18D

## DYNAMIC PARAMETER TUNING USING PARTICLE SWARM OPTIMIZATION

**[0001]** The present application claims the benefit of priority to U.S. Provisional Patent Application Ser. No. 61/707,911 filed Sep. 29, 2012, titled "Dynamic Parameter Tuning Using Particle Swarm Optimization," the disclosure of which is hereby incorporated herein by reference in its entirety.

### FIELD

**[0002]** The embodiments relate generally to control systems, and more particularly to dynamic parameter tuning using particle swarm optimization.

### BACKGROUND

**[0003]** Dynamic parameter tuning (DPT) tunes parameters of dynamic models. Given transfer function model structures (e.g., exciters, governors, power system stabilizers, generators, wind turbines, electrical machines, FACTS devices, controllers), typical values of model parameters, power system network (if available), and field recorded data using smart sensor devices like PMUs, DPT tunes parameters of dynamic models (e.g., gains, transfer functions, integrators, derivative, time constants, limiters, saturation constants, dead zones, delay) where deviation between the recorded data and the calculated output of the model using the tuned parameters is minimum. In other words, DPT can be used to estimate the values of the parameters that make the controllers respond as similarly as possible to a field measured response (i.e. measurements from a staged test or field recorded disturbance). The tuning response can be accomplished by using an iterative approach that automatically adjusts the tunable settings or parameters in the model to make the controller response match that of field recorded data. This process may also be known as automatic model validation parameter tuning.

**[0004]** A phasor measurement unit (PMU) or synchrophasor is a device that measures the electrical waves on an electricity grid, using a common time source for synchronization. A phasor is a complex number that represents both the magnitude and phase angle of the sine waves found in electricity. Time synchronization allows synchronized real-time measurements of multiple remote measurement points on the grid. In power engineering, these are also commonly referred to as synchrophasors and are considered one of the most important measuring devices in the future of power systems. A PMU can be a dedicated device, or the PMU function can be incorporated into a protective relay or other device. DPT can use the data from PMUs.

**[0005]** DPT is a complex constraint optimization problem in a huge complex multi-dimensional search space because the above mentioned dynamic systems are highly non-linear with limiters (saturation) and are highly sensitive to parameters; they have multiple inputs/outputs (multi-objective) and multiple solutions exist.

**[0006]** Particle swarm optimization (PSO) is a promising optimization method for engineering applications today. It is a swarm based iterative optimization method. Each potential solution, called a particle, flies in a multi-dimensional search space with a velocity, and the velocity is dynamically adjusted according to the flying experience of the particle and other particles.

**[0007]** The least square method is typically used for parameter identification (PI). Few products are available in the market for PI using mainly least square method and not a

single product is available for parameter tuning (PT) where any intelligent optimization method is used.

**[0008]** It is very difficult and time consuming to tune the dynamic model parameters from time domain input and output values (curves or data points) because of complex relationships and high sensitivity. It is a complex constraint optimization problem in complex search space with thousands of data points including limits and saturations. Practical control systems have many complex control blocks with saturation limits (gains, transfer functions, integrators, derivative, time constants, limiters, saturation constants, dead zones, delay, etc.), and thus the traditional least square method is not suitable mainly for DPT where balance between local and global search is very important for fine tuning.

### SUMMARY

**[0009]** Dynamic parameter tuning using modified particle swarm optimization is disclosed. According to one embodiment, a system for dynamically tuning parameters comprising a control unit; and a system for receiving parameters tuned by the control unit. The control unit receives as input a model selection and definitions, and dynamically tunes a value for each parameter by using a modified particle swarm optimization method. The modified particle swarm optimization method comprises moving particle locations based on a particle's inertia, experience, global knowledge, and a tuning factor. The control unit outputs the dynamically tuned value for each parameter.

**[0010]** The systems, methods, features and advantages of the invention will be or will become apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional methods, features and advantages be included within this description, be within the scope of the invention, and be protected by the accompanying claims. It is also intended that the invention is not limited to require the details of the example embodiments.

### BRIEF DESCRIPTION

**[0011]** The accompanying drawings, which are included as part of the present specification, illustrate the presently preferred embodiment and, together with the general description given above and the detailed description of the preferred embodiment given below, serve to explain and teach the principles of the present invention.

**[0012]** FIG. 1 illustrates an exemplary controller for use with the present system, according to one embodiment.

**[0013]** FIG. 2 illustrates an exemplary dynamic parameter identification (DPI) process flow.

**[0014]** FIG. 3 illustrates an exemplary dynamic parameter tuning (DPT) process flow.

**[0015]** FIG. 4 illustrates an exemplary particle swarm optimization (PSO) process flow.

**[0016]** FIG. 5 illustrates an exemplary model for typical dynamic parameter tuning (DPT).

**[0017]** FIG. 6 illustrates an exemplary simplified IEEE power system stabilizer (PSS) model.

**[0018]** FIG. 7 illustrates a voltage-time plot for parameter effects corresponding to the PSS model illustrated in FIG. 6.

**[0019]** FIG. 8A illustrates an exemplary modified PSO (MPSO) process flow.



[0020] FIG. 8B illustrates an exemplary parameter tuning process for use with the present system, according to one embodiment.

[0021] FIGS. 9A and B illustrate yet another exemplary DPT calculation process using MPSO for use with the present system, according to one embodiment.

[0022] FIG. 10 illustrates an exemplary ST type governor used for simulation, according to one embodiment.

[0023] FIG. 11 illustrates exemplary speed over time for the exemplary ST type governor depicted in FIG. 10.

[0024] FIG. 12 illustrates a comparison of mechanical power output for the exemplary ST type governor depicted in FIG. 10.

[0025] FIG. 13 illustrates an IEEE type AC2A exciter used for simulation, according to one embodiment.

[0026] FIG. 14 illustrates Vt for the exemplary IEEE type AC2A exciter illustrated in FIG. 13.

[0027] FIG. 15 illustrates Efd for the IEEE type AC2A exciter illustrated in FIG. 13.

[0028] FIG. 16 illustrates an IEEE PSS2B dual-input power system stabilizer used for simulation, according to one embodiment.

[0029] FIGS. 17A-17C illustrate recorded data associated with the simulation of a model according to FIG. 16.

[0030] FIGS. 18A-18D illustrate exemplary responses after different iterations of simulations with the model depicted in FIG. 16.

[0031] It should be noted that the figures are not necessarily drawn to scale and that elements of similar structures or functions are generally represented by like reference numerals for illustrative purposes throughout the figures. It also should be noted that the figures are only intended to facilitate the description of the various embodiments described herein. The figures do not necessarily describe every aspect of the teachings disclosed herein and do not limit the scope of the claims.

#### DETAILED DESCRIPTION

[0032] Embodiments disclosed herein are directed to methods and systems for dynamic parameter tuning. The present embodiments can be applied in generators, exciters, governors, power system stabilizers, wind turbines, electrical machines, FACTS devices, and controllers.

[0033] Dynamic parameter tuning (DPT) is a constraint optimization problem to find the best set of tuned parameter values to match with given field-measured data. An intelligent optimization method is required to come up with the optimal or near optimal values of parameters to reduce deviation between measured field data and calculated outputs. Automatic DPT adds an additional new layer in time saving capabilities, saving hundreds of engineering man-hours spent on the tedious process of model validation and parameter tuning. Parameter tuning of a power system network is very important for modeling, simulation, control and protection because it affects many power system studies, e.g., transient stability, voltage distortion, relay setting and so on. Thus it is recommended to tune parameters over time for more accurate power system analysis results.

[0034] Applications of DPT include tuning and validating dynamic control elements of generic dynamic models. This includes but is not limited to following exemplary types of controllers or dynamic models:

[0035] 1) Synchronous Motors Exciter/AVR models;

[0036] 2) Synchronous Generator Exciter/AVR models;

[0037] 3) Synchronous Generator Turbine, Engine/Speed Control models;

[0038] 4) Synchronous Generator PSS (Power System Stabilizer) models;

[0039] 5) Wind Turbine Generator Models;

[0040] 6) Generic Load Models (Lumped Load Element Dynamic Models).

[0041] The embodiments disclosed herein directed to DPT using MPSO can be applied in generators, exciters, governors, power system stabilizers, wind turbines, electrical machines, FACTS devices, and controllers. The embodiments described herein are generic, robust and they always converge. The embodiments described herein play an important role for modeling better power systems and help to simulate and build smarter grid.

[0042] FIG. 1 illustrates an exemplary controller for use with the present system, according to one embodiment. The controller is not intended to suggest any limitation as to scope of use or functionality, as the technologies described herein may be implemented in diverse general-purpose or special purpose computing environments. With reference to FIG. 1, the controller 100 can include at least one processing unit 110 (e.g. signal processor, microprocessor, ASIC, or other control and processing logic circuitry) coupled to memory 120. The processing unit 110 executes computer-executable instructions and may be a real or a virtual processor. The memory 120 may be volatile memory (e.g. registers, cache, RAM), non-volatile memory (e.g. ROM, EEPROM, flash memory, etc.), or some combination of the two. The memory 120 can store software implementing any of the technologies described herein. The controller may have additional features. For example, the controller can include storage 140, one or more input devices 150, one or more output devices 160, and one or more communication connections 170. An interconnection mechanism (not shown), such as a bus or network interconnects the components. Typically, operating system software (not shown) provides an operating environment for other software executing in the controller and coordinates activities of the components of the controller.

[0043] The storage 140 may be removable or non-removable, and can include magnetic disks, magnetic tapes or cassettes, CD-ROMs, CD-RWs, DVDs, or any other computer-readable media that can be used to store information and which can be accessed within the controller. The storage 140 can store software containing instructions for controlling systems described herein.

[0044] The input device(s) 150 can be a touch input device such as a keyboard, mouse, pen, or trackball, a voice input device, a scanning device, or another device. The output device(s) 160 may be a display, printer, speaker, CD- or DVD-writer, or another device that provides output from the controller. Some input/output devices, such as a touch screen, may include both input and output functionality.

[0045] The communication connection(s) 170 enables communication over a communication mechanism to another computing entity. The communication mechanism conveys information such as computer-executable instructions, audio/video or other information, or other data. By way of example, and not limitation, communication mechanisms include wired or wireless techniques implemented with an electrical, optical, RF, microwaves, infrared, acoustic, or other carrier.

[0046] FIG. 2 illustrates an exemplary dynamic parameter identification (DPI) process flow. DPI is a process for identifying parameters where models are variable and DPI is used

when a model is unknown. A standard model,  $M_i$ , is chosen along with parameters **201**. The model and parameters are modified **202**. Outputs are calculated using the chosen model, parameters, and given inputs **203**. A deviation between given outputs and corresponding calculated outputs is calculated **204**. If the deviation is less than a predefined threshold **205**, then the process is complete. Otherwise the process continues back to **201**.

**[0047]** Applications of DPI include identification of parameters of generic systems with multiple inputs and outputs, exciters, governors, stabilizers, wind turbine generators, inverters, chargers, UPS's, rotary UPS's, motors, generators, saturation limits, damping, and inertia.

**[0048]** FIG. 3 illustrates an exemplary dynamic parameter tuning (DPT) process flow. DPT is a process to tune parameters where models are fixed. DPT is used when a model is known and typical values of the parameters of the model are also known. DPT is needed because in most cases, typical parameter values or values provided from manufactures do not match input and output perfectly and/or parameter may be changed over time. A given model,  $M$ , is taken with parameters for a system where typical values of parameters are known **301**. The values of the parameters are tuned **302**. Outputs are calculated using the given model, parameters, and given inputs **303**. A deviation between given outputs and corresponding calculated outputs is calculated **304**. If the deviation is less than a predefined threshold, **305**, the process is complete. Otherwise the process returns to **302**.

**[0049]** DPT is very important in power industry for the following reasons:

**[0050]** Manufacturer parameter data may not be available or suitable for every system;

**[0051]** Dynamic parameters have high impact on the quality of system analysis;

**[0052]** Systems are highly non-linear complex models;

**[0053]** Results are very sensitive to parameters;

**[0054]** Verification and validation are not simple; and

**[0055]** DPT is a requirement of reliable power operations in modern power systems.

**[0056]** Applications of DPT include tuning parameters of generic systems with multiple inputs and outputs, exciters, governors, stabilizers, wind turbine generators, inverters, chargers, UPS's, rotary UPS's, motors, generators, saturation limits, dampings, inertia, and networks consisting of generators, exciters, governors, PSS, power networks, load and so on.

**[0057]** FIG. 4 illustrates an exemplary particle swarm optimization (PSO) process flow. PSO is a bio-inspired swarm based stochastic algorithm based on the behavior of flocks of birds and schools of fish, and has similarities to other population based evolutionary algorithms. Basic equations of PSO are:

$$v_{ij}(k+1) = v_{ij}(k) + c_1 * \text{rand}_1 * (p\text{best}_{ij}(k) - x_{ij}(k)) + c_2 * \text{rand}_2 * (g\text{best}_j(k) - x_{ij}(k)) \quad (1)$$

$$x_{ij}(k+1) = x_{ij}(k) + v_{ij}(k+1) \quad (2)$$

**[0058]** At each generation, PSO changes the velocity and location of each particle toward its pbest location depending on memory and gbest location depending on knowledge according to (1) and (2), respectively. A particle's best location is referred to as experience, and the best location of all the particles of the swarm is referred to as knowledge.

**[0059]** In the above velocity equation (1), the first term indicates inertia of the particle; the second term presents the cognitive part of the particle; and the third term is the social part of PSO.

**[0060]** Referring to FIG. 4, particles are initialized randomly **401**. Each particle is moved based on (1) its inertia, (2) own experience, and (3) global knowledge **402**. Fitness is calculated **403**, and each particle's experience and knowledge is updated **404**. Once a maximum number of iterations has been reached **405**, the best result is printed **406** and the process is complete. Otherwise the process returns to **402**.

**[0061]** Some applications of PSO include Economic Load Dispatch, Unit Commitment, Real Power and Voltage Control, State Estimation, Optimum Power Flow, System Identification and Intelligent Control, Network Reconfigurations, General Maintenance Scheduling, Optimum Capacitor Placement, Shortest route Calculation, and PSS Parameter Tuning.

**[0062]** FIG. 5 illustrates an exemplary model for typical dynamic parameter tuning (DPT). Inputs for the exemplary DPT model include specific or fixed models/functions ( $M$ ), measured inputs ( $I_i$ ) and measured outputs ( $O_i$ ) from field data points or curves of the models/functions, and typical values of the dynamic parameters ( $K_1, K_2, \dots, K_n$ ) from experience or manufacturers. Outputs from the exemplary optimization engine include tuned parameter values ( $K'_1, K'_2, \dots, K'_n$ ) to fit the inputs and outputs more accurately. It is assumed in FIG. 5 that model and parameter names are known, however, exact parameter values are unknown. Exact parameter values are very important in generator control systems because some parameters are very sensitive. Correct parameter values may not be available from manufacturers and parameter values may also be de-rated over time.

**[0063]** FIG. 6 illustrates an exemplary simplified IEEE power system stabilizer (PSS) model. FIG. 7 illustrates a voltage-time plot corresponding to the PSS model illustrated in FIG. 6. In the exemplary simplified IEEE PSS model, if time constants  $T_2$  and  $T_3$  are both assigned to 0.15 sec instead of actual value 0.1 sec, then a significant change in output signal  $V_s$  is visible in FIG. 7.

**[0064]** FIG. 8A illustrates an exemplary modified PSO (MPSO) for use with the present system, according to one embodiment. According to one embodiment, MPSO is used to dynamically tune parameters. Depending on DPT problems, PSO needs to be modified for quick convergence and better results. DPT is a complex constraint optimization problem and thus the present embodiments introduce a tuning factor for more precise local search at the end in the modified PSO to better balance local and global searches as described below.

**[0065]** Referring to FIG. 8A, particles are initialized randomly **801**, and each particle is moved based on its (1) inertia, (2) experience, (3) global knowledge, and (4) tuning factor **802**. Each particle is repaired if it exceeds any limit **803**. Fitness is calculated **804** and each particle's knowledge, experience, and tuning factor are updated **805**. Once a maximum number of iterations has been reached **806**, the best result is printed **807** and the process is complete. Otherwise the process returns to **802**.

**[0066]** Advantages to using MPSO in DPT include the following:

**[0067]** (i) optimizing or tuning a wide range of both integer and real type model parameters (decision/state variables);

[0068] (ii) handling of constraints/limits/saturations in the dynamic model;

[0069] (iii) handling of general multi-input/multi-output dynamic systems;

[0070] (iv) MPSO is not limited to any non-concave functions, order of functions, non-differentiable functions of the dynamic models;

[0071] (v) MPSO has balance between local and global search abilities for the fine tuning of model parameters;

[0072] (vi) MPSO has information sharing mechanisms of model parameters;

[0073] (vii) MPSO can be implemented in multi-objective strategy;

[0074] (viii) parameters in MPSO method can be solved in parallel platform and MPSO has been utilized in modern multi-core processing facilities;

[0075] (ix) MPSO can handle both scalar and complex data of a power network;

[0076] (x) MPSO can handle noisy data from field measurements; and

[0077] (xi) MPSO is fast, robust, and is easy to implement.

[0078] According to one embodiment, the present system includes a modified PSO for DPT as below:

$$w = 1.0 - 0.9 * k / \text{MaxIte} + \text{rand}_3 \quad (3)$$

$$v_{ij}(k+1) = w * v_{ij}(k) + c_1 * \text{rand}_1 * (pbest_{ij}(k) - x_{ij}(k)) + c_2 * \text{rand}_2 * (gbest_j(k) - x_{ij}(k)) \quad (4)$$

$$\left. \begin{aligned} x_{ij}(k+1) &= x_{ij}(k) + v_{ij}(k+1) & \text{if } k < \text{MaxIte}/2 \\ x_{ij}(k+1) &= x_{ij}(k) + BF * v_{ij}(k+1) & \text{if } k \geq \text{MaxIte}/2 \end{aligned} \right\} \quad (5)$$

$$BF = 0.15 / w \quad (6)$$

[0079] Where:

[0080]  $\text{rand}_1 = \text{random}(0, 1)$

[0081]  $\text{rand}_2 = \text{random}(0, 1)$

[0082]  $\text{rand}_3 = \text{random}(-0.01, 0.01)$

[0083]  $BF = \text{Balancing Factor}$

[0084]  $pbest_{ij} = \text{Local best of a particle } i \text{ for dimension } j$

[0085]  $gbest_j = \text{Global best of all the particles for dimension } j$

[0086]  $k = \text{Current iteration}$

[0087]  $\text{MaxIte} = \text{Maximum number of iterations}$

[0088] In modified PSO for parameter tuning as disclosed herein, inertia is improved in (3) and a balancing factor (also referred to herein as tuning factor) is added in (5) in the second half of the iterations. Some constants are used for inertia weight,  $w$  in (3) and balancing factor  $BF$  in (6) from experience, which are ideal for dynamic parameter estimation applications.

[0089] Fitness plays an important role for the convergence of dynamic parameter tuning (DPT). Formulating DPT as a minimization problem where the objective is to minimize total deviation over entire available time domain sequential data takes care of all available data points. Therefore both steady state and transient of field recorded measured data and calculated data match closely. A fitness value for the objective is calculated as below:

$$\text{Fitness} = \sum_{i=1}^{\text{MaxData}} |\text{Measured\_Output}_i - \text{Calculated\_Output}_i| \quad (7)$$

[0090] Tunable parameters are state variables in DPT. Some parameters can be fixed as users may already know those parameters' values. At each iteration, modified PSO as disclosed herein generates a tentative solution for tunable parameters. Those parameter values and input data of the dynamic model from field are used to generate calculated outputs of dynamic model sequentially at every time step. Then the fitness is the total absolute difference of the field-measured outputs and calculated outputs over the entire study period.

[0091] According to one embodiment, handling of saturation parameters includes a direct repair. If a particle's position exceeds a saturation limit, the particle is forced to come back inside the saturation limits. Velocity and direction are also changed so that next time the particle will move under the valid saturation limits. This method generates a feasible solution from an infeasible solution. Pseudo code of direct repair to handle saturation parameters, according to one embodiment, is shown below:

---

```

// Max limit checking
if ( x[i][j] > MaxSaturationLimit[j] )
{
    if ( ParticleMaxSaturationLimitHit[i][j] = false )
    {
        x[i][j] = MaxSaturationLimit[j]
        ParticleMaxSaturationLimitHit[i][j] = true
    }
    else
    {
        x[i][j] = random( MinSaturationLimit[j],
            MaxSaturationLimit[j] )
        V[i][j] = - V[i][j]/2.0
        ParticleMaxSaturationLimitHit[i][j] = false
    }
}
// Min limit checking
if ( x[i][j] < MinSaturationLimit[j] )
{
    if ( ParticleMinSaturationLimitHit[i][j] = false )
    {
        x[i][j] = MinSaturationLimit[j]
        ParticleMinSaturationLimitHit[i][j] = true
    }
    else
    {
        x[i][j] = random( MinSaturationLimit[j],
            MaxSaturationLimit[j] )
        V[i][j] = - V[i][j]/2.0
        ParticleMinSaturationLimitHit[i][j] = false
    }
}

```

---

[0092] According to one embodiment, the direct repair method is applied for constraints of other parameters, e.g., time constant and gain.

[0093] DPT involves time domain sequential calculations. Measured data is needed at every instant of time that is an integer multiple of a simulation time step. However, depending on precision or sampling rate, measured data may not be available for every desired instant of time. Interpolation or extrapolation is performed to estimate data at a desired instant of time.

[0094] FIG. 8B illustrates an exemplary parameter tuning process for use with the present system, according to one embodiment. An apparatus implementing the present technology receives a model selection input 810, and receives defined saturation limits, iteration thresholds, and any other definitions necessary for tuning calculations 820. Measure parameter values or field data are received 830, and then parameter values are dynamically tuned using modified PSO as described herein 840. Tuned parameters values are then output 850.

[0095] FIG. 9 illustrates an exemplary DPT calculation process using MPSO for use with the present system, according to one embodiment. The proposed process updates its particle solution after calculating all the output data for an entire time period (typically seconds or minutes). In online and real-time applications, the proposed method updates parameters when any transient data comes from the field. The proposed method can handle any number of objectives and constraints of the dynamic model.

[0096] It is assumed that the dynamic model (model type, blocks, connections, inputs and outputs) is known. Therefore the process builds the dynamic model 901 with proper parameters where some or all parameter values are unknown.

[0097] Particles are problem solving agents for PSO. According to one embodiment, the present process takes a suitable number of particles depending on the problem complexity (as an example, generally twenty is recommended). Dimensions of each particle contribute to the number of parameters of the dynamic model. Each particle is initialized 902 by its typical value+Random(−Limit, Limit). Exemplary sources of typical values are manufacturers or similar type of known models or practical experiences. Large values are assigned for pbest, gbest and fitness.

[0098] Velocity and position are updated 903 depending on a particle's experience and other particles' knowledge. In this way, the PSO method shares information. Dynamic model changes its internal states at every time step during transient. However, internal states are fixed once the model goes to a steady state.

[0099] As the model is known and already initialized, all time domain outputs over the entire simulation time can be calculated 904 for all given inputs sequentially considering time step.

[0100] Calculated outputs are available from the model for a set of parameter values. Fitness is calculated 905 as a total deviation of calculated and measured outputs. Maximum deviation at any instant of time as well as average deviations are calculated 905 from all time domain measured and calculated outputs. The process stops if desired maximum and/or average deviations are reached. If current fitness of a particle is less than all of its previous fitness calculations, pbest is updated to its current fitness 906. Also, if current fitness of a particle is the least of all particles, gbest is updated to the least fitness 906. The process also stops when a maximum number of iterations 908 is reached or the desired maximum and/or average deviation 907 is achieved. Upon exiting the present process, gbest is printed for the best optimized or tuned parameters 909.

[0101] Simulation of exemplary embodiments of the methods disclosed herein yielded results as discussed below.

[0102] FIG. 10 illustrates an exemplary ST type governor used for simulation, according to one embodiment. FIG. 11 illustrates exemplary speed over time for the exemplary ST type governor depicted in FIG. 10. FIG. 12 illustrates a com-

parison of mechanical power output for the exemplary ST type governor depicted in FIG. 10.

[0103] In a first case of simulation, an ST type governor is used for simulation and speed and mechanical power data are generated using ETAP. Speed data is collected from ETAP for 5 sec and 1 ms time step, resulting in a total of 5000 data points considered for simulation in the ST type governor. The proposed method tunes the parameters of ST type governor accurately, the values can be reviewed in Table I. Typical values of parameters for an ST type governor are considered as initial values in the present MPSO method. A sufficiently large range is considered as search space for each parameter so that the optimum values are not skipped. For example, a typical value of the control amplifier (servomotor) time constant, Tc, is 100 ms where the limit is 0 to 200 ms. The MPSO method as disclosed herein generates 50.7 ms for the given field input and output data.

[0104] Mechanical power output comparison is shown in FIG. 12 where the deviation (error) is tolerable. Typical droop is 5%; however, tuned droop is 10% in Table I and thus other parameters are also changed to minimize error accordingly. Total absolute error for 5,000 points is only 0.1386 which is acceptable for power system parameter tuning.

TABLE I

Typical and tuned values of ST governor parameters			
Parameter	Initial/ Typical Value	Limit	Tuned Parameter
Fhp (pu)	0.70	0-1.0	0.7141
Tsr (sec)	0.10	0-0.2	0.2000
Tc (sec)	0.10	0-0.2	0.0507
Tch (sec)	0.15	0-1.0	0.0507
Trh (sec)	5.0	0-10	10.000
Droop (%)	5.0	0-10	10.000
Pmax (MW)	8.333	Fixed	—
Pmin (MW)	0	Fixed	—
Total abs. deviation		0.1386	

Where:

Fhp (Shaft capacity ahead of reheater)/(Total shaft capacity);

Tsr Speed relay time constant;

Tc Control Amplifier (servomotor) time constant;

Tch Steam chest time constant;

Trh Reheater time constant;

Droop Steady-state speed droop;

Pmax Maximum shaft power (rated MW); and

Pmin Minimum shaft power ( $\geq 0$ ).

[0105] FIG. 13 illustrates an IEEE type AC2A exciter used for simulation, according to one embodiment. FIG. 14 illustrates Vt for the exemplary IEEE type AC2A exciter illustrated in FIG. 13. FIG. 15 illustrates Efd for the IEEE type AC2A exciter illustrated in FIG. 13.

[0106] In a second case of simulation, an IEEE type AC2A exciter is chosen for simulation because its size is moderate, it has saturation limits, it has sufficient number of tunable parameters and thus it is complex enough to test the proposed method. For testing, available input data are Vt, Efd and model (IEEE Type AC2A). Total simulation time is 6 sec and time step is 1 ms, resulting in a total number of 6,000 test data points. Typical and tuned values of parameters can be reviewed in Table II. Measured and calculated graphs for Efd overlap each other perfectly.

TABLE II

Typical and tuned values of IEEE Type AC2A exciter parameters			
Parameter	Initial/ Typical Value	Limit	Tuned Parameter
VAm <sub>max</sub>	8	0-20	7.271077
VAm <sub>min</sub>	-8.0	0-12	-6.739573
VR <sub>max</sub>	105.0	50-120	120.000000
VR <sub>min</sub>	-95.0	-195-0	-122.57930
VUEL	-150.0	0300-0	-97.545231
VOEL	150	0-250	115.419180
VFE <sub>max</sub>	4.4	1.0-8.0	3.668523
E1	4.4	1.0-8.0	4.988201
SE1	0.037	0.01-0.06	0.060000
E2	3.3	1.0-6.0	2.916942
SE2	0.012	0.001-0.1	0.020610
KA	400.0	100-600	338.943905
KB	25.0	1-50	29.132722
KC	0.28	0.01-5.0	0.331152
KD	0.35	0.01-5.0	0.367732
KE	1.0	0.01-10	0.747691
KF	0.03	0.01-3.0	0.037096
KH	1.0	0.01-50.0	1.002858
TA	0.01	0.0-5.0	0.027783
TB	0.0	0.0-5.0	0.475612
TC	0.0	0.0-5.0	0.485672
TE	0.6	0.001-5.0	0.657070
TF	1.0	0.0-5.0	1.000728
TR	0.0	0.0-5.0	0.002582
Total abs. deviation			10.9

[0107] FIG. 16 illustrates an IEEE PSS2B dual-input power system stabilizer used for simulation, according to one embodiment. In a third case of simulation, DPT of an IEEE PSS2B dual-input power system stabilizer model is explored, which typically uses power and speed to derive the stabilizing signal. The model transfer functions are displayed in FIG. 16. Inputs in FIG. 16 are the electrical power (Pe) and the speed (W) and the output is stabilizing voltage (Vs). For each input, two washouts exist (TW1 to TW4) along with a transducer or integrator time constants (T6, T7).

[0108] Input and output data are collected from ETAP transient stability program in a study of a 3-phase fault at 1st sec for 0.1 sec at a close bus followed by a 1236 kVA load shedding at 5th sec. Total data is collected for 30 sec and sampling rate is 1.0 ms because it takes long time to stable. However, transients are occurred at 1st 5th seconds. In this study, ST4B exciter is connected to the generator that can work perfectly with the PSS type IEEE PSS2B.

[0109] FIGS. 17A-17C illustrate recorded data associated with the simulation of a model according to FIG. 16. Inputs are electrical power (Pe) and speed (W) which are shown in FIGS. 17A and 17B. Output is stabilizing voltage (Vs) which is shown in FIG. 17C. Note that, sometime field measured data might be available for a long period of time (e.g., 500 sec); however, it is not necessary to use entire data for tuning because it is slow. A portion of the data is enough; however, the data must have sufficient transients to tune the parameters.

TABLE III

Tunable parameters of IEEE PSS2B and typical values			
Block Name	Parameter Name	Typical Value (pu)	Tunable?
Wash-Tw1	Tw1	10.0	Yes
Wash-Tw2	Tw2	10.0	Yes
Wash-Tw3	Tw3	10.0	Yes

TABLE III-continued

Tunable parameters of IEEE PSS2B and typical values			
Block Name	Parameter Name	Typical Value (pu)	Tunable?
Wash-Tw4	Tw4	0.0	Yes
Trans Func1	KS2	0.99	Yes
	T7	10.0	Yes
Trans Func2	T6	0.0	Yes
Gain-KS3	KS3	1.0	Yes
Ramp	T8	0.5	Yes
	T9	0.1	Yes
Gain-KS1	KS1	20.0	Yes
LeadLag1_2	T1	0.15	Yes
	T2	0.025	Yes
LeadLag3_4	T3	0.15	Yes
	T4	0.02	Yes
LeadLag10_11	T10	0.0	Yes
	T11	0.033	Yes
VsInMaxMin	Pe <sub>max</sub>	2.0	No
	Pe <sub>min</sub>	-2.0	No
VsOutMaxMin	Vs <sub>max1</sub>	0.1	No
	Vs <sub>min1</sub>	-0.1	No

[0110] FIGS. 18A-18D illustrate exemplary responses after different iterations of simulations with the model depicted in FIG. 16. Results at 2nd iteration (FIG. 18A), 32nd iteration (FIG. 18B), 77th iteration (FIG. 18C), and 200th iteration (FIG. 18D) are shown. Initially deviation is very large using typical values of the parameters. Even in the beginning, calculated output does not catch the train of the measured output well. However, at the 19th iteration, calculated output catches the train of the measured output; though, deviation is significant at the beginning of the transients and not acceptable for reliable power systems operation or compliances. At 77th iteration, calculated output overlaps the measured output, with some exceptions. This may be acceptable for reliable power systems operation or compliances. At the final iteration (out of 200), calculated and measured outputs match perfectly, which was desired (with the exception of some peak points only due to noise; this is acceptable). This result is a perfect fine tuning process using modified PSO as initially it converges fast and at the final stage it converges slowly not to miss local minima. Plots up to only 6 sec are shown because there is no transient after 6 sec and the system is steady state there.

TABLE IV

Tuned parameters of IEEE PSS2B					
Block Name	Parameter Name	Typical Value (pu)	Limit	Tunable?	Tuned Value
Wash-Tw1	Tw1	10.0	5.0-50.0	Yes	6.040
Wash-Tw2	Tw2	10.0	5.0-50	Yes	7.440
Wash-Tw3	Tw3	10.0	5.0-50	Yes	10.520
Wash-Tw4	Tw4	0.0	0.0-0.01	Yes	0.011
Trans Func1	KS2	0.99	0.099-9.9	Yes	0.726
	T7	10.0	0.2-20	Yes	20.050
Trans Func2	T6	0.0	0.00-0.01	Yes	0.00
Gain-KS3	KS3	1.0	0.1-10	Yes	1.079
Ramp	T8	0.5	0.05-5.0	Yes	0.394
	T9	0.1	0.05-0.3	Yes	0.100
Gain-KS1	KS1	20.0	10.0-40.0	Yes	20.214
LeadLag1_2	T1	0.15	0.01-0.3	Yes	0.152
	T2	0.025	0.015-0.05	Yes	0.040
LeadLag3_4	T3	0.15	0.015-0.5	Yes	0.141
	T4	0.02	0.01-0.05	Yes	0.042

TABLE IV-continued

Tuned parameters of IEEE PSS2B					
Block Name	Parameter Name	Typical Value (pu)	Limit	Tunable?	Tuned Value
LeadLag10_11	T10	0.0	0-0.01	Yes	0
	T11	0.033	0.003-0.05	Yes	0.033
VsInMaxMin	Pe_max	2.0	Fixed	No	Fixed
	Pe_min	-2.0	Fixed	No	Fixed
VsOutMaxMin	Vs_max1	0.1	Fixed	No	Fixed
	Vs_min1	-0.1	Fixed	No	Fixed

**[0111]** IEEE PSS2B is complex system and it has multiple feasible solutions. Table IV shows one set of tuned values of IEEE PSS2B parameters. Some tuned parameters are close to typical values; however, others are not. The disclosed method rejects infeasible values of the parameters and iterates to improve the parameters values until deviation is tolerable for an application.

**[0112]** The present method is for dynamic parameter tuning, and the algorithm works for known models including input-output data and comes up with values of the parameters.

**[0113]** The present method can optimize or tune a wide range of both integer and real model parameters (decision or state variables). Users can initialize parameters by typical values. The method takes longer to converge and/or solution quality will be affected if the parameters are started from unrealistic values.

**[0114]** The present method can handle constraints, limits, and saturations in the dynamic model efficiently. The method is not limited to use any non-convex models, saturation/limit control blocks, logic control blocks, higher order non-differentiable functions, close loop models, or references.

**[0115]** The present method can handle multi-input/multi-output dynamic systems. It has no limitations on number of inputs, number of outputs, number of parameters, number of blocks, or number of polynomial function orders. However, execution time and solution quality depends on complexity of models and number of parameters because in PSO particle dimension is the number of parameters or unknown.

**[0116]** The present method is not limited to any non-convex and discontinuous functions, order of control functions and non-differentiable functions of the dynamic models. It can be used for tuning of any exciter, governor, PSS, or network where inputs, output and model structure are known.

**[0117]** The present system enables a balance between local and global search abilities for the fine tuning of model parameters. Balance of local and global search is an important criteria for optimization. The proposed modified PSO performs a global search in the beginning to move fast using large steps. At the end, it performs local search using small steps so that a good solution is not missed. Moreover, randomness is included to skip from local minima. Thus it is a stochastic optimization for parameter tuning.

**[0118]** PSO has information sharing and conveying mechanism that helps to tune parameters of complex control systems efficiently. It can be implemented in multi-objective strategies to tune multi-objective models. A model may have more than one output and the present method can achieve all outputs as weighted aggregation or separately as multi-objective strategy.

**[0119]** For a complex model and a large number of parameters, DPT converges in the range of minutes. According to

one embodiment of the present system, DPT using modified PSO can be solved in parallel platforms for each particle and can utilize modern multi-core processing facilities.

**[0120]** According to one embodiment of the present system, users can scan average error and/or max error during the optimization process and stop if desired minimum deviation is achieved.

**[0121]** According to one embodiment, the present system is used for online parameter tuning. The present system is fast and robust with respect to typical methods.

**[0122]** Disclosures of the following references are considered relevant to the present disclosure, and are hereby incorporated by reference in their entirety.

**[0123]** [1] R. Bhaskar, M. Crow, E. Ludwig, K. Erickson, K. Shah, "Nonlinear parameter estimation of excitation systems," *IEEE Trans. on Power System*, vol. 15, no. 4, pp. 1225-1231, November 2000.

**[0124]** [2] C. M. Liaw, et al., "Parameter estimation of excitation systems from sampled data", *IEEE Trans. on Automatic Control*, vol. 37, no. 5, 1992.

**[0125]** [3] J.-C. Wang, H.-D. Chiang, C.-T. Huang, Y.-T. Chen, C.-L. Chang, C.-Y. Huang, "Identification of excitation system models based on on-line digital measurements," *IEEE Trans. on Power Systems*, vol. 10, no. 3, 1995.

**[0126]** [4] C.-S. Liu, Y.-Y. Hsu, L.-H. Jeng, C.-J. Lin, C.-T. Huang, A. H. Liu, T.-H. Li, "Identification of exciter constants using a coherence function based weighted least squares approach," *IEEE Trans. Energy Conversion*, vol. 8, no. 3, 1993.

**[0127]** [5] E. B. S. Filho, A. M. N. Lima, C. B. Jacobina, "Parameter estimation for induction machines via non-linear least squares method," *Proc. Int. Conf. Industrial Electronics, Control and Instrumentation (IECON)*, 1991, vol. 1, pp. 639-643.

**[0128]** [6] J. C. Cepeda, J. L. Rueda and I. Erlich, "Identification of Dynamic Equivalents based on Heuristic Optimization for Smart Grid Applications," *WCCI 2012 IEEE World Congress on Computational Intelligence*, pp. 1204-1211, Jun. 10-15, 2012, Brisbane, Australia.

**[0129]** [7] R. Chen, W. Wu, H. Sun, and B. Zhang, "A two-level online parameter identification approach," *IEEE PES General Meeting*, Jul. 21-25, 2013, Vancouver, BC Canada.

**[0130]** [8] D. Wei, P. Zanchetta, and D. W. P. Thomas, "Identification of electrical parameters in a power network using genetic algorithms and transient measurements," *Proc. Power Electronics and Motion Control Conference (PEMC)*, 2008, pp. 1716-1721.

**[0131]** [9] Z. Al-Hamouz, H. N. Al-Duwaish, N. A. Al-Musabi, "Particle Swarm Optimization Sliding Mode Controller," *US Patent*, Pub. No. US 2011/0257800 A1, Oct. 20, 2011.

**[0132]** [10] J. Kennedy and R. C. Eberhart, "Particle swarm optimization," *Proc. IEEE Int. Conf. on Neural Networks*, pp. 1942-1948, Perth, Australia, 1995.

**[0133]** [11] J. Kennedy and R. C. Eberhart, "A discrete binary version of the particle swarm algorithm," *Proc. of IEEE Conf. on Systems, Man, and Cybernetics*, pp. 4104-4109, 1997.

**[0134]** [12] Y. Valle, G. K. Venayagamoorthy, S. Mohagheghi, J.-C. Hernandez, and R. G. Harley, "Particle swarm optimization: Basic concepts, variants and applications in Power Systems," *IEEE Trans. Evolutionary Computation*, vol. 12, no. 2, pp. 171-195, April 2008.

[0135] [13] Z.-L. Gaing, "Particle swarm optimization to solving the economic dispatch considering the generator constraints," IEEE Trans. Power Syst., vol. 18, no. 3, pp. 1187-1195, August. 2003.

[0136] [14] A. Y. Saber, T. Senjyu, A. Yona, and T. Funabashi, "Unit commitment computation by fuzzy adaptive particle swarm optimization," IET Gen. Transm. Dist., vol. 1, no. 3, pp. 456-465, May 2007.

[0137] The functions described may be implemented in hardware, software, firmware or any combination thereof. If implemented in software, the functions may be stored as one or more instructions on a computer-readable medium. A storage media may be any available media that can be accessed by a computer. By way of example, and not limitation, such computer-readable media can comprise RAM, ROM, EEPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to carry or store desired program code in the form of instructions or data structures and that can be accessed by a computer. Disk and disc, as used herein, include compact disc (CD), laser disc, optical disc, digital versatile disc (DVD), floppy disk, and Blu-ray® disc where disks usually reproduce data magnetically, while discs reproduce data optically with lasers.

[0138] Thus, certain aspects may comprise a computer program product for performing the operations presented herein. For example, such a computer program product may comprise a computer readable medium having instructions stored (and/or encoded) thereon, the instructions being executable by one or more processors to perform the operations described herein. For certain aspects, the computer program product may include packaging material.

[0139] Software or instructions may also be transmitted over a transmission medium. For example, if the software is transmitted from a website, server, or other remote source using a coaxial cable, fiber optic cable, twisted pair, digital subscriber line (DSL), or wireless technologies such as infrared, radio, and microwave, then the coaxial cable, fiber optic cable, twisted pair, DSL, or wireless technologies such as infrared, radio, and microwave are included in the definition of transmission medium.

[0140] Further, it should be appreciated that modules and/or other appropriate means for performing the methods and techniques described herein can be downloaded and/or otherwise obtained by a user terminal and/or base station as applicable. For example, such a device can be coupled to a server to facilitate the transfer of means for performing the methods described herein. Alternatively, various methods described herein can be provided via storage means (e.g., RAM, ROM, a physical storage medium such as a compact disc (CD) or floppy disk, etc.), such that a user terminal and/or base station can obtain the various methods upon coupling or providing the storage means to the device. Moreover, any other suitable technique for providing the methods and techniques described herein to a device can be utilized.

[0141] Dynamic parameter tuning using particle swarm optimization has been disclosed. It is understood that the embodiments described herein are for the purpose of elucidation and should not be considered limiting the subject matter of the disclosure. Various modifications, uses, substitutions, combinations, improvements, methods of productions without departing from the scope or spirit of the present invention would be evident to a person skilled in the art.

What is claimed is:

1. A system for dynamically tuning parameters, comprising:
  - a control unit; and
  - a system for receiving parameters tuned by the control unit; wherein the control unit
    - receives as input a model selection and definitions;
    - dynamically tunes a value for each parameter by using a modified particle swarm optimization method, wherein the modified particle swarm optimization method comprises moving particle locations based on a particle's inertia, experience, global knowledge, and a tuning factor; and
    - outputs the dynamically tuned value for each parameter.
2. The system of claim 1, wherein the system for receiving parameters tuned by the control unit is one of a controller, generator, exciter, governor, or power system stabilizer.
3. The system of claim 1, wherein the system for receiving parameters tuned by the control unit is one of a load, a wind turbine, electrical machine, power grid, FACTS device, or electrical power system.
4. The system of claim wherein each parameter is one of gain, transfer function, integrator, derivative, time constant, limiter, saturation constant, dead zone, or delay.
5. A computer readable medium having stored thereon a plurality of instructions, the instructions executable by a processor to perform:
  - receiving as input a model selection and definitions;
  - dynamically tuning a value for each parameter of a plurality of parameters by using a modified particle swarm optimization method, wherein the modified particle swarm optimization method comprises moving particle locations based on a particle's inertia, experience, global knowledge, and a tuning factor; and
  - outputting the dynamically tuned value for each parameter.
6. The computer readable medium of claim 5, wherein a particle is a solution of a parameter.
7. The computer readable medium of claim 5, wherein the modified particle swarm optimization method further comprises:
  - initializing a particle by assigning a value of a typical value added to a random number to the particle;
  - updating a velocity of the particle and a location of the particle based on the particle's inertia, experience, global knowledge, and a tuning factor;
  - calculating a fitness for the particle, wherein the fitness is a difference between a measured output and a calculated output for a parameter associated with the particle;
  - updating the particle's experience and global knowledge if the fitness is better than a previous fitness calculation; and
  - outputting a best value upon confirmation that the fitness is below a defined threshold and a maximum number of iterations has been achieved.
8. The computer readable medium of claim 5, wherein the computer readable medium is incorporated in one of a controller, generator, exciter, governor, or power system stabilizer.
9. The computer readable medium of claim 5, wherein each parameter is output to one of a load, a wind turbine, electrical machine, power grid, FACTS device, or electrical power system.

10. The computer readable medium of claim 5, wherein each parameter is one of gain, transfer function, integrator, derivative, time constant, limiter, saturation constant, dead zone, or delay.

\* \* \* \* \*