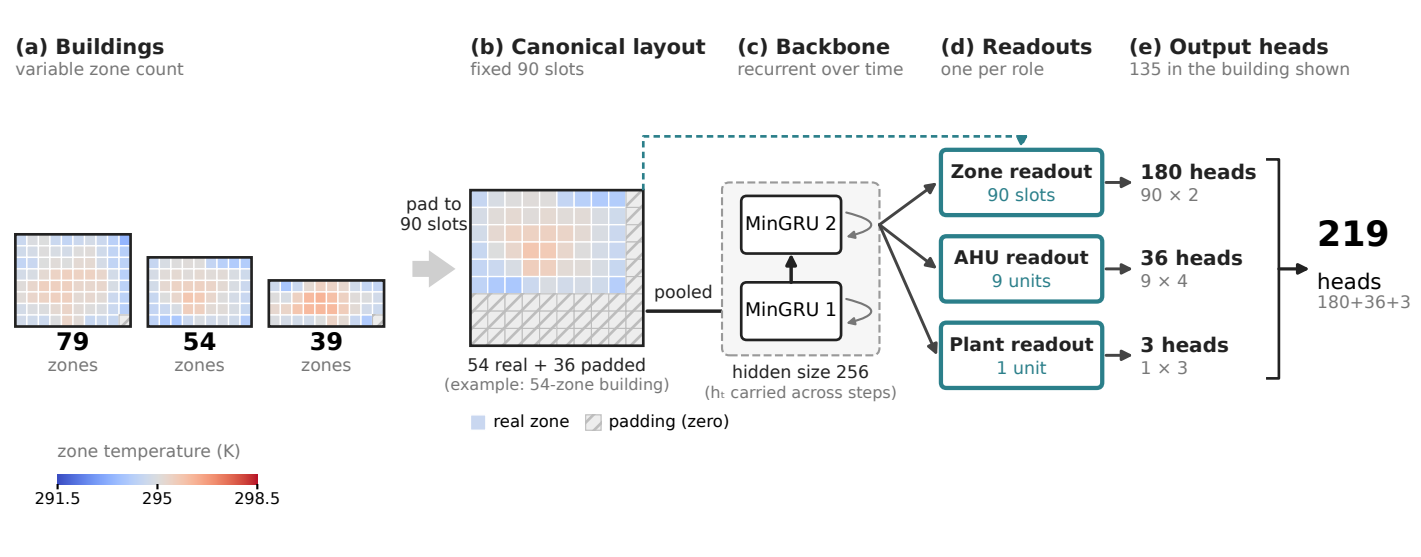
(a) Buildings
variable zone count
79
zones
54
zones
39
zones
zone temperature (K)
291.5
295
298.5
(b) Canonical layout
fixed 90 slots
pad to
90 slots
54 real + 36 padded
(example: 54-zone building)
real zone
padding (zero)
(c) Backbone
recurrent over time
pooled
MinGRU 2
MinGRU 1
hidden size 256
(hₜ carried across steps)
(d) Readouts
one per role
Zone readout
90 slots
AHU readout
9 units
Plant readout
1 unit
(e) Output heads
135 in the building shown
180 heads
90 × 2
36 heads
9 × 4
3 heads
1 × 3
219
heads
180+36+3