

Display Device				
System Parameters (defined by hardware)		Profiles (usage of each component mode - defined by software)		
form the datasheets		datasheet	"off"	"sensing"
			"interactive"	
Processor		https://github.com/Sienna-Zhang/514_final/blob/main/514_final/datasheets/ESF		
Active	85 mW		0%	5%
Idle	33 mW		0%	15%
Sleep	0 mW		100%	80%
LED				
On	7 mW		0%	5%
Sensor		https://github.com/Sienna-Zhang/514_final/blob/main/514_final/datasheets/HCS		
On	75 mW		0%	100%
Idle	75 mW		0%	0%
Off	0 mW		100%	0%
Display		https://github.com/Sienna-Zhang/514_final/blob/main/514_final/datasheets/step		
On	1000 mW		0%	0%
Off (leakage)	0 mW		100%	100%
Radio		https://github.com/Sienna-Zhang/514_final/blob/main/514_final/datasheets/ESF		
Data Rate	300 bps		0%	0%
Standby Power	5 mW		0%	95%
TX Power	20 mW		0%	3%
RX Power	10 mW		0%	2%
Battery				
Capacity	500 mAh		22	1.5
Nominal Voltage	3 V			0.5 hours/day typical
Regulator Efficiency	95%			

The display device

REFLECTIONS : WHAT DID YOU LEARN FROM ANALYZING YOUR POWER. TALK ABOUT SOME POTENTIAL TRADEOFFS. that motor activity

ware and usage)


p32.pdf

SR04%EF%BC%881%EF%BC

oper%20motor.pdf


p32.pdf

al usage

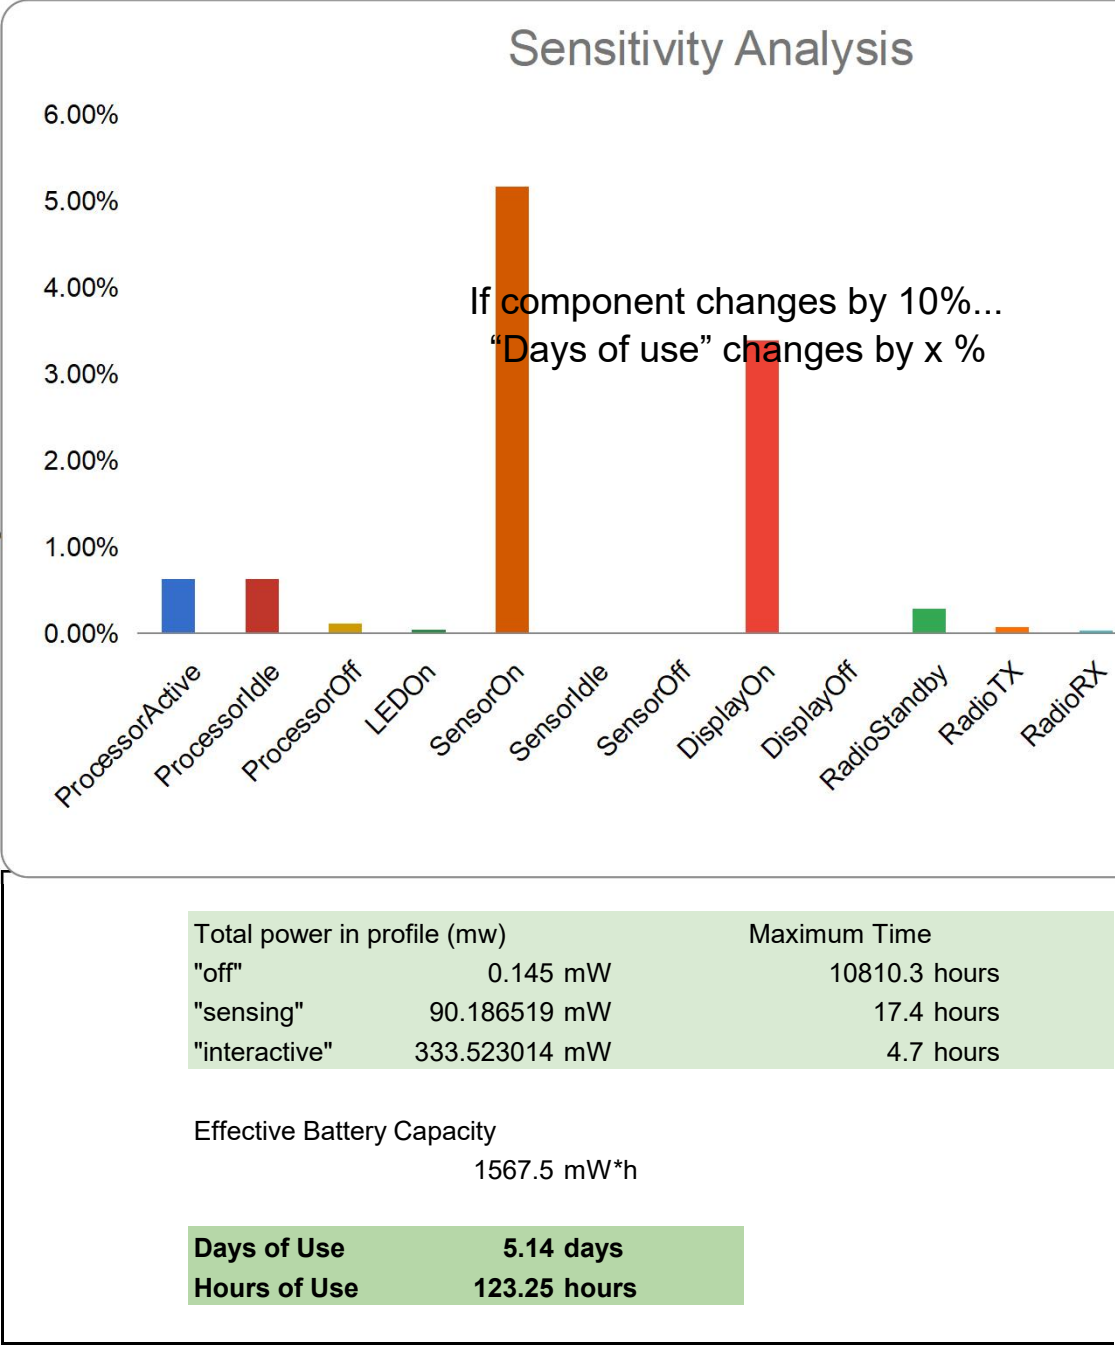

- ProcessorActive
- ProcessorIdle
- ProcessorOff
- LEDOn
- SensorOn
- SensorIdle
- SensorOff
- DisplayOn
- DisplayOff
- RadioStandby
- RadioTX
- RadioRX

Sensitivity Analysis

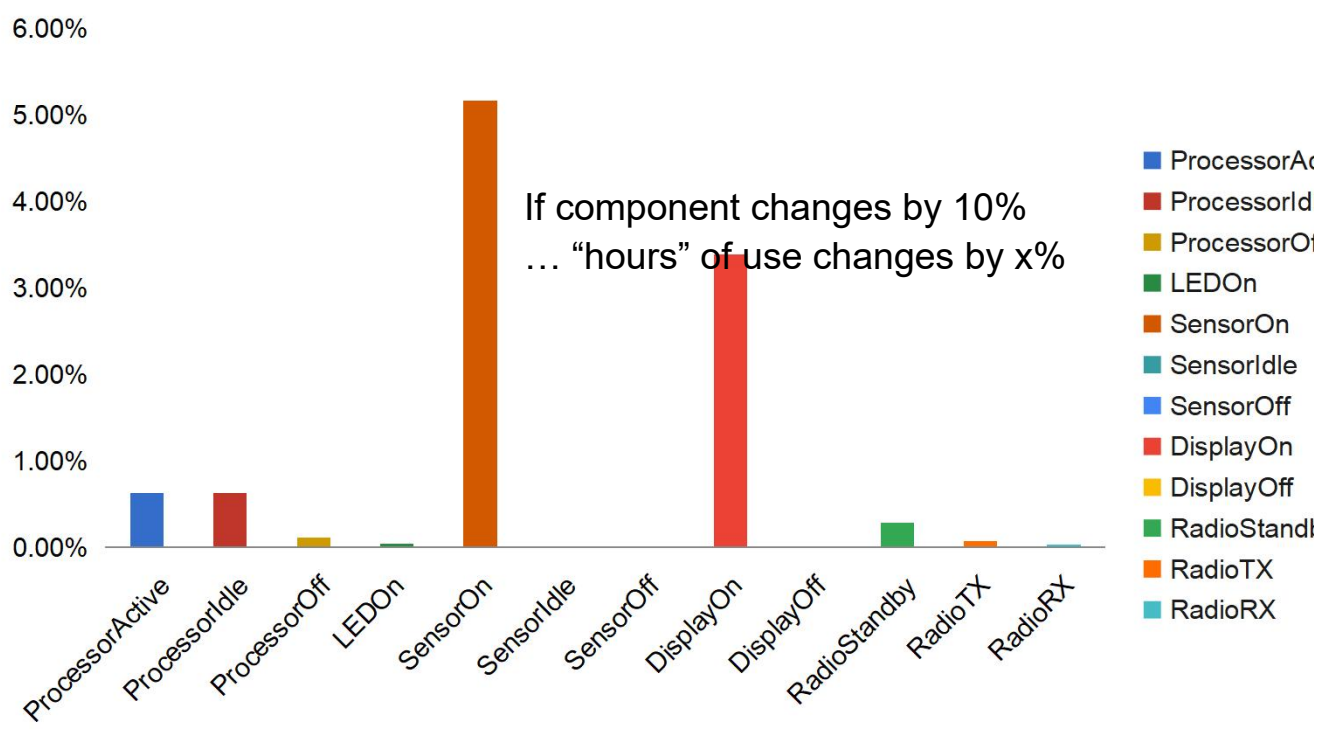

Linked Data from First Page DO NOT EDIT

System Parameter	0	0	0
0 from the datasheet	0	0	0
0	0	0	0
Processor Active	0	0	0
85 mW	76.329	85	85
		85	85

[illegible]

[illegible]

ective
lle
ff

by

[illegible]

0	0
0	0
0	0
0	0
0	0
0	0

Profiles (usage	0	0	0
0	0	0	0
"off"	"sensing"	"interactive"	0
0	0	0	0
0%	5%	30%	0

[illegible]

[illegible]