
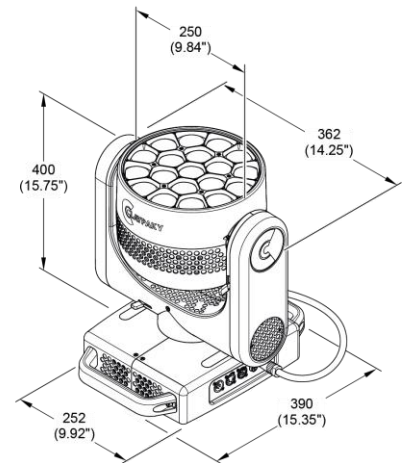


MODEL: MIDI-B WW / MIDI-B WW PL LED

CODE: CL3019 / CL3055

September 25, 2026

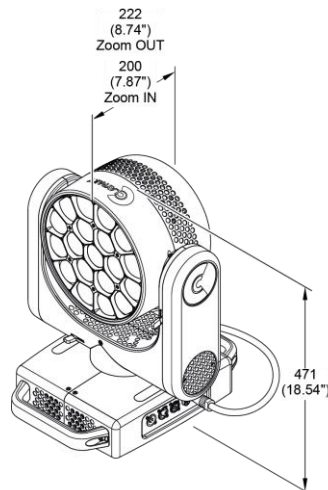

LIGHT SOURCE:

Source type: • Osram 40W RGBWW LEDs (x 19)

LED life

expectancy: • 20.000 Hrs L70*

* It may vary depending on various factors, such as the type of use and environment

Midi-B WW – WWhite LED: 2900K

Midi-B WW PL LED – WWhite LED: 3050 K

PHOTOMETRIC DATA:

Zoom range: • 4° - 50°

Lm output: • 11.401 Lm (integrating sphere)

Optical syt.: • High efficiency

NOISE LEVEL:

Fixed presets:

- Theatre: 34,5 dBA
- Silent: 35,2 dBA
- Auto: 39,2 dBA
- Constant: 41,2 dBA

CONTROL & CONNECTIONS:

Personalities: • 4 modes with 17 / 21 / 25 / 37 control channels

Protocols: • DMX, Art-Net, sACN, RDM

Connectors: • Locking 5 pin XLR IN/OUT
• RJ45 IN

Power con.: • PowerCon True1 IN/OUT

Web server: • Built-in

CloudIO: • Fully compatible

DYNAMIC EFFECTS:

Colors:

- Linear RGBWW
- Linear CTO (6500K to 2500K color temperature control)
- Preset Macro colors
- Three independently controlled LED rings

Movement:	• Tilt: 270° - 16 bit • Pan: 540° - 16 bit • Automatic repositioning • Mechanical Pan/Tilt lock for safe transportation and maintenance • Fast/Standard speed selectable by Function channel
Beam:	• Motorized zoom and focus • Automatic repositioning when DMX is disconnected
Dimmer / Shutter:	• High resolution electronic dimmer - 24 bit, 5 curves • High speed electronic strobe

HARDWARE & SOFTWARE:

- Long life self-charging battery
- Display graphic LCD backlit B/W display
- Firmware upload from another fixture
- Firmware upgrade via Web Server
- Diagnostic
- DMX monitoring
- Remote access through RDM

HOUSING:

- Aluminium and steel structure with plastic covers
- Two side handles for transportation
- IP20 protection rate
- Working in any position
- Hanging system: with fast-lock Omega clamps (1/4 turn on the base)
- Optional safety chain

ELECTRICAL:

Operating voltage:	• 100-240V, 50/60 Hz
Power Supply:	• Electronic auto range with active PFC
MAX power consumption:	• 830 VA

THERMAL SPECIFICATION:

MAX Ambient temperature:	• 45°C (113°F)
Min Ambient Temperature:	• -20°C (-4°F)
MAX temp. of the ext. surface:	• 90°C (194°F)
Total heat dissipation:	• 2596 BTU/hr ±10% / 2736 kJ/hr ±10%

SAFETY SPECIFICATIONS:

Min. dist. of illum. objs:	• 0,2 m (8")
Min. dist. from flamm. mat.:	• 0,2 m (8")
Protections:	• Thermally protected power supply (overheating and cooling failure) • Forced ventilation with axial fans • Fuse T10A – 250V

COMPLIANCE:

CE Marking (in conformity to the following):

- 2014/35/EU – Safety of electrical equipment supplied at low voltage (LVD)
- 2014/30/EU – Electromagnetic Compatibility (EMC)
- 2011/65/EU - Restriction of the use of certain hazardous substances (RoHS)
- 2009/125/EC - EcoDesign requirements for Energy-related Products (ErP)

UKCA conforms to UK regulations:

- S.I. 2016 N. 1101
- S.I. 2016 N.1091
- S.I. 2012 N.3032
- S.I. 2010 N.2617

cMETus LISTED:

- UL 1573:2003
- CSA C22.2 N.166:2015

PACKAGING:

- Carton box + Polystyrene
- Carton box + Foam shell
- Flight case + Foam shell (4 positions)

WEIGHT & SIZES:

Weight:	• 17 Kg (37,5 lbs)
Base dim.s:	• 252 x 390 mm • 9,92 x 15,35 In
Height with vert. head (h):	• 471 mm • 18,54 In
Dist. b/t 2 fixt:	• 500 mm

ACCESSORIES:

Omega bracket:	• 2x183102/805 (Included)
ETL Power:	• CAB02B/802 (Included)* * Cord 1.5 m (bare end with IP65 PowerConTrue1 conn.)
Egg crate:	• CA3005000100 (Optional)
Flight case (4 pos):	• CF1010F (Optional)
Foam shell:	• F21321/001 (Optional)
Safety Chain:	• 105041/003 (Optional)