


STRIKE Bolt 1C

An intense, IP65-rated strobe and blinder featuring integrated Smart Frost to instantly shift from powerful bursts to smooth color block effects, with tool-free connections for creating versatile arrays.

Perfect for concert, touring, festival, and event productions requiring a powerful and adaptable strobe effect for any live or broadcast setting, indoors or out.

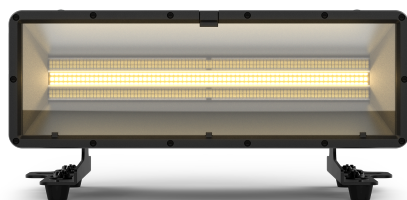

- Combines 392 cool white LEDs for strobe with 66 RGBA LEDs for color washes.
- Produces vibrant RGBA color washes and high-quality white with a CRI of 89.2.
- Creates powerful strobe effects with an adjustable electronic shutter rate up to 30 Hz.
- Offers maximum rigging versatility with multiple hanging points and floor mounting options.
- An included stealth filter minimizes on-camera presence for broadcast and streaming.
- Provides flexible control via DMX and RDM with eight distinct channel personalities.

SPECIFICATIONS

Optical

Light Source: 66 LEDs (quad-color) SMD 5050, 0.9 – 1.5 W, (470 mA), 50,000 hours life expectancy

Light Source: 392 LEDs, (CW) 1.5 W, 5660 K, 50,000 hours life expectancy

Color Temperature (at full): 5692K

CRI: 89.2

Beam Angle:

Combine: 77.5° x 55.8°

Plate: 84.6° x 73.6°

Beam: 77.7° x 54.7°

Field Angle:

Combine: 130.6° x 104.4°

Plate: 139.7° x 114.5°

Beam: 129.1° x 102.3°

Lumens:

Combined: 20,251

Plate: 2735

Beam: 23,736

Illuminance:

Combined: 605 lux @ 5 m

Plate: 66 lux @ 5 m

Beam: 729 lux @ 5 m

Selectable PWM: 1000 Hz, 2000 Hz, 4000 Hz, 6000 Hz, 25,000 Hz, 64,000 Hz

Dimming: Ultra-smooth 18-bit dimming curves and speeds to complement any lighting scheme.

Dynamic Effects

Dimmer: Electronic

Shutter/Strobe: Electronic

Strobe Rate: 0 to 30 Hz

Standalone Color Mixing: Yes

Dim Modes: 4

Built-in Automated Programs: Yes

Construction / Physical

Dimensions: 14.96 x 8.39 x 11.81 in (380 x 213 x 300 mm)

Weight: 19 lbs. (8.7 kg)

Exterior Color: Black

Housing Material: Magnesium alloy

Connections

Power Connection: Edison (Local) plug to Seetronic Powerkon IP65

Power Input: Seetronic Powerkon IP65

Power Output: Seetronic Powerkon IP65

Data Connectors: 5-pin IP65 XLR, Seetronic etherCON IP65

Cable Length (power): 5 ft (1.5 m)

Control

Control Protocol: DMX, RDM

DMX Channels: 10, 11, 13, 17, 20, 25, 27, 40

Modes/Personalities: 8 personalities (7, 10, 12, 16, 19, 32, 40, 53)

Electrical

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Power Linking: 4 units @ 120 V; 6 units @ 208 V; 8 units @ 230 V

Power and Current: 329 W, 2.82 A @ 120 V, 60 Hz

Power and Current: 326 W, 1.82 A @ 208 V, 60 Hz

Power and Current: 323 W, 1.48 A @ 230 V, 50 Hz

Certifications / Qualifications

IP Rating: IP65, temporary outdoor/wet use, with pressure equalizing M12 GORE valve

Temperature (Ambient): -4 °F to 113 °F (-20 °C to 45 °C)

Optional Accessories

STRIKE Array Flush Bracket

Professional Clamps: CTC-50HC, CTC-50HCN

Safety Cable: SC-08

IP Rated Seetronic® Powerkon Extensions

IP Rated DMX cables

UPLOAD 03 software uploader

What's Included

STRIKE Bolt 1C

Stealth Filter

Seetronic Powerkon IP65

Omega bracket with mounting hardware