

# PIXEL LINE IP

## STROBE 3 IP

Omega Bracket Mounting Version

Sliding Adjustable Clamp Version

Light Source

**672 x 0.5W RGB LED**  
**112 x 3W CW LED**

Beam Angle

**RGB Beam Angle: 101°**  
**CW Beam Angle: 108°**

Field Angle

**RGB Field Angle: 149°**  
**CW Field Angle: 152°**

Protection Rating

**IP66**

Acme

PIXEL LINE IP



Color Mapping



Full Open Transparent



Linear Strobe



Full Open by Frosted

### Main Features

Light Source:

672pcs 0.5W RGB LED

(can be divided into 32 controllable sections)

112pcs 3W CW LED

(can be divided into 16 controllable sections)

DMX Controllable Smart Glass technology

Patent No.:

CN216010577U

US11698183B1

DE202023101966U1

FR3134870B3

Outstanding color effects


High output strobe effects

Multiple units can be connected tool free


Four dimming curves

### Technical Specifications

1. Omega Bracket Mounting Version

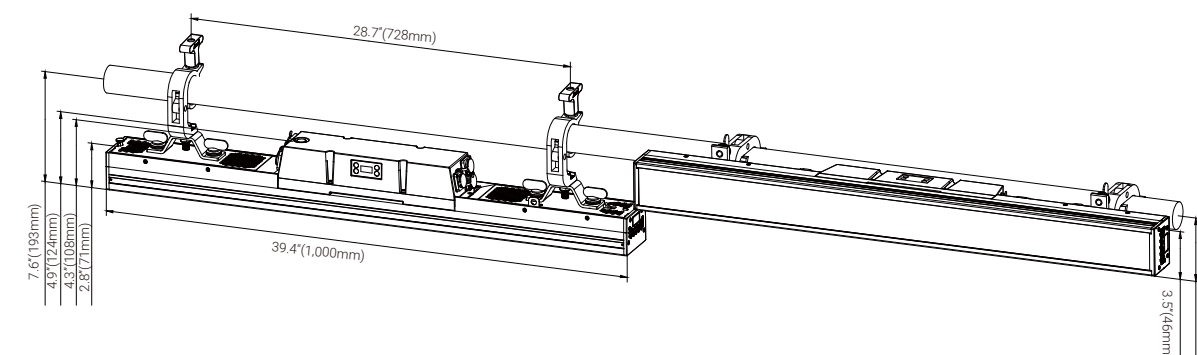

2. Sliding Adjustable Clamp Version

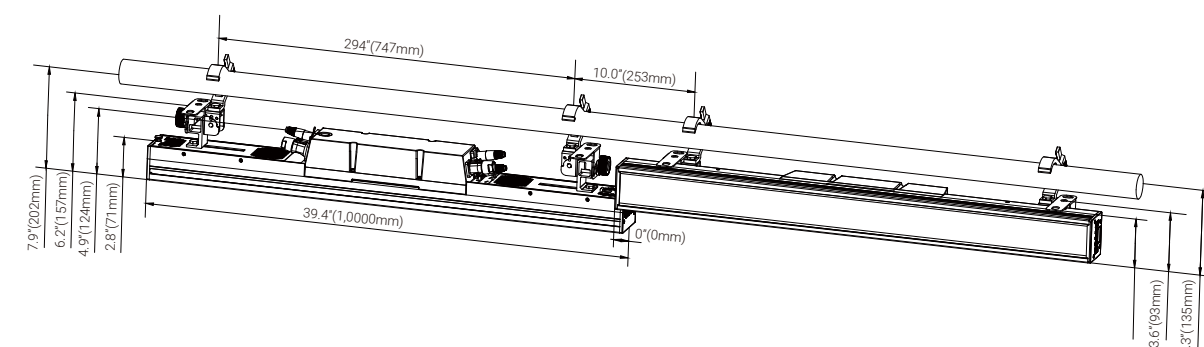

Version

- Vesion1: STROBE 3 IP (Omega Bracket Mounting)
- Vesion 2: STROBE 3 IPS (Sliding Adjustable Clamp)
- Note: Different vesions cannot be connected together

Light Source

- Light Source:
  - 672 x 0.5W RGB LED
  - 112 x 3W CW LED
- Color Temperature Output of Fixture: 5,500K-7,000K
- Total Lumen Output of Fixture: 21,900 lumens
- Life Expectancy: 30,000 hours\*

\*Source manufacturer specification

Optical System

- Beam Angle:
  - RGB Beam Angle: 101°
  - CW Beam Angle: 108°
- Field Angle:
  - RGB Field Angle: 149°
  - CW Field Angle: 152°

Other Effects

- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%
- Outstanding color effects

Control

- 4 touch button control panel
- Display: OLED display
- Protocols: DMX512, RDM, Art-Net, sACN
- DMX Protocol Modes: 13
- Control Channels:
  - 7/15/17/21/33/39/65/68/70/70N/112/117/119
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 420W
- Power In/Out: Waterproof connections
- Data In/Out: 3-pin or 5-pin waterproof XLR, RJ45 connector

Physical Information

- Fixture Dimensions:
  - Omega Bracket Mounting VersionFlight:
    - 1,000 x 90 x 124 mm (39.4" x 3.5" x 4.9")
    - Weight: 7.3 kg (16.1 lbs)
  - Sliding Adjustable Clamp Version:
    - 1,000 x 192 x 237 mm (39.4" x 7.6" x 9.3")
    - Weight: 8.3 kg (18.3 lbs)

Packing Information

- Flight Case Dimensions - Omega Bracket Mounting Version :
  - 1,196 x 580 x 750 mm (47.1" x 22.8" x 29.5")
  - Weight :
    - Standard :
      - G.W.: 126.5 kg (278.9 lbs) (eight-pack loader case)
- Flight Case Dimensions-Sliding Adjustable Clamp Version :
  - 1,209 x 565 x 655 mm (47.6" x 22.2" x 25.8")
  - Weight :
    - Standard :
      - G.W.: 115 kg (253.5 lbs) (eight-pack loader case)
- Flight Case Dimensions - Omega Bracket Mounting Version:
  - 1,220 x 610 x 830 mm (48.0" x 24.0" x 32.7")
  - Weight :
    - North American Standard :
      - G.W.: 138.2 kg (304.7 lbs) (eight-pack loader case)
- Carton Dimensions:
  - 1,085 x 195 x 320 mm (42.7" x 7.7" x 12.6")
  - Weight: 10.5 kg (23.0 lbs) (one-pack loader carton)

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -10°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP66

Installation

- Horizontal or vertical mounting
- Universal working position
- 2 omega brackets
- Safety cable attachment point


Included Items

- Digital user manual
- Power cable
- 2 omega brackets (3002003002)

Optional Accessories (with item code)

- Flight Case - Omega Bracket Mounting Version:
  - Standard : Eight-pack loader case (63582731)
- Flight Case -Sliding Adjustable Clamp Version :
  - Standard : Eight-pack loader case (63582662)
- Flight Case - Omega Bracket Mounting Version:
  - North American Standard : Eight-pack loader case (63582905)
- Safety Cable: Sw-02 (2060000200-B)
- Signal Cable: 3-pin waterproof signal cable (3017013468) or 5-pin waterproof signal cable (3017013473)
- Customized Foldable Clamps & Floor Stand with Omega Bracket (63583890)
- Customized Floor Stand with Omega Bracket (63583863)
- Customized Floor Stand without Omega Bracket (63583845)

1.Omega Bracket Mounting Version

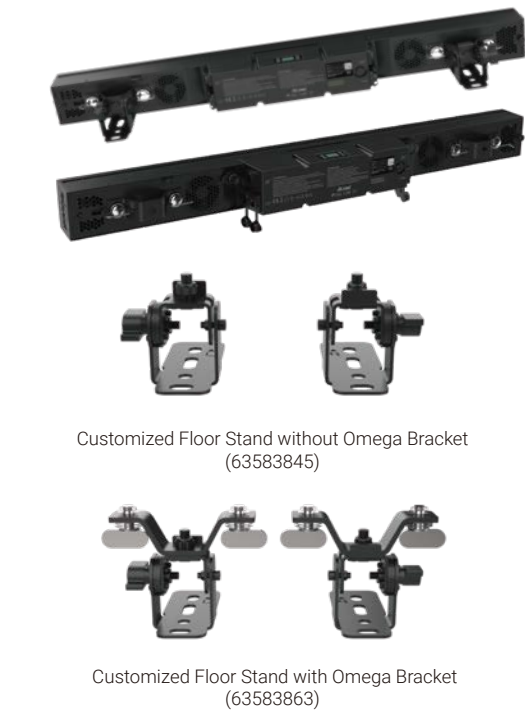


2.Sliding Adjustable Clamp Version




Photometric (Images)

Beam Angle:

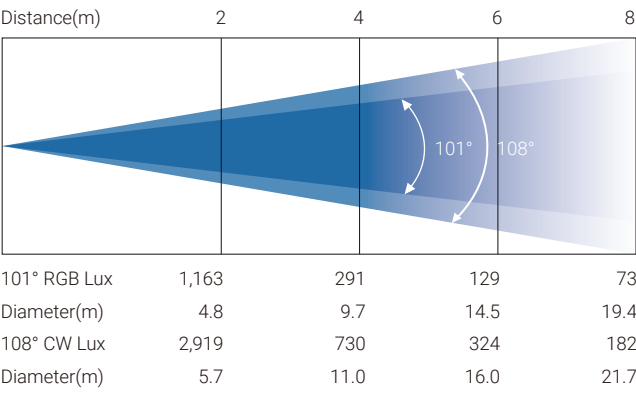

Field Angle:

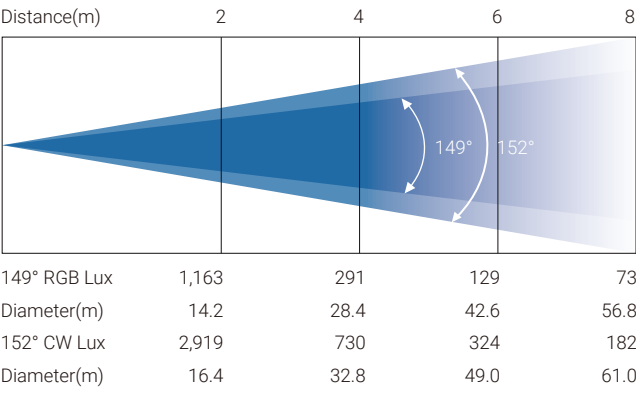

Specifications subject to change without notice.  
18/06/2026