



AROLLA AQUA HP & HP-FS CL3035; CL3042

DATASHEET

10th JULY 2026

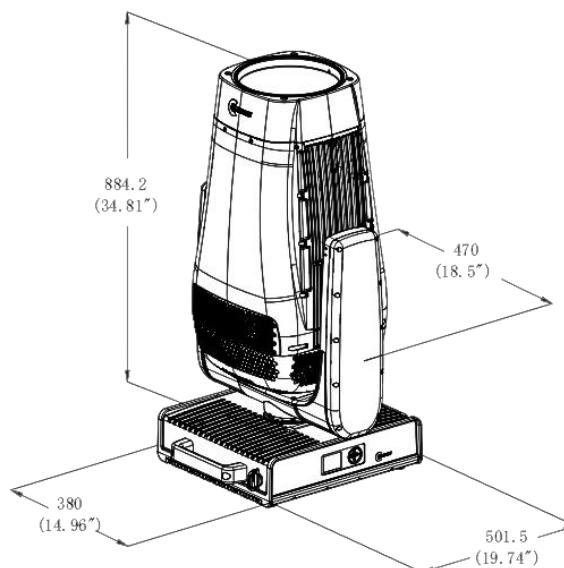

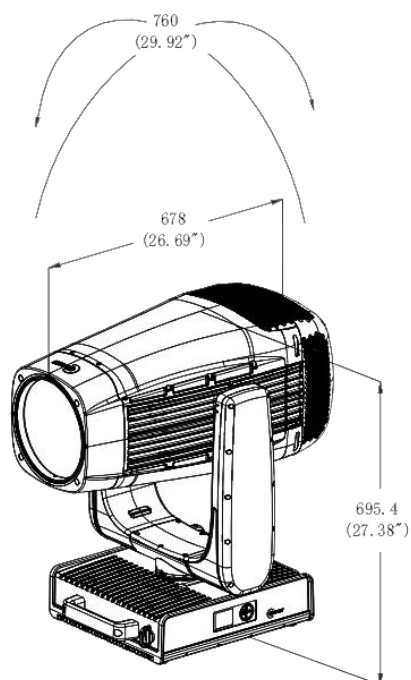

LIGHT SOURCE:

- | | |
|-----------------------------|--|
| Power: | • 1400W |
| Source type | • Cold White LED |
| Color temperature: | • 7200 K $\pm$ 300K |
| CRI: | • Up to 70 with selectable filter for CRI up to 88 |
| LED life expectancy: | • 20.000 Hrs L70* |

* *It may vary depending on various factors, such as the type of use and environment*

PHOTOMETRIC DATA:

- | | |
|----------------------|----------------------------------|
| Zoom range: | • 3.5° - 55.5° |
| Long-throw: | • 0.5° - 11° |
| Lm output: | • 66.000 Lm (integrating sphere) |
| Front lens: | • Ø 220 mm |
| Optical syt.: | • High efficiency |

NOISE LEVEL:

Fixed presets:	Silent mode:	43.1 dBA
	Auto mode:	45.5 dBA
	Theatre mode:	43.1 dBA
	Constant mode:	51.3 dBA

CONTROL & CONNECTIONS:

Personalities:	• 1 mode with 43 control channels
Protocols:	• DMX, Art-Net, sACN, RDM • CRMX (Timo FX) (Lumen Radio)
Connectors:	• Locking 5 pin XLR IN/OUT • RJ45 IN/OUT
In addition, with FS version:	• USB 12V + RJ45 for camera version
Power con.:	• PowerCon True1 IN/OUT
Web server:	• Built-in
CloudIO:	• Fully compatible

DYNAMIC EFFECTS:

Colors:	• CMY color mixing • Linear CTO filter 2800K – 6500K • Two fixed color wheels with 5 dichroic colors each
Framing Systems:	• 4 blades with $\pm 60^\circ$ rotation and macro channel control • Framing system with 90° rotation
Gobos:	• 2 rotating gobos wheels with 6 HD gobos each (30 mm gate) • “Go bright” tech: no light loss or color shift when gobos are inserted in the beam
Frost:	• 1x5° frost filter (Lineguard technology)
Rotating effects:	• 2 rotating prisms: - 4-facet linear - 4-facet circular • 1 animation wheel
Iris:	• 16-blades motorized
Movement:	• Tilt: 270° • Pan: 540° • Absolute position • Special feature Sunsafes protection • Tilt brake • Mechanical Pan/Tilt lock for safe transportation and maintenance
Beam:	• Motorized zoom and focus
Dimmer / Shutter:	• High resolution electronic dimmer - 24 bit, 5 curves • Electronic strobe

HARDWARE & SOFTWARE:

- Long life self-charging battery
- Display graphic LCD backlit B/W display
- Firmware upload from another fixture
- Firmware upgrade via Web Server
- Diagnostic
- DMX monitoring
- Remote access through RDM

HOUSING:

- Magnesium and steel structure with plastic components
- Two side handles for transportation
- IP66 protection rate
- Working in any position
- Hanging system: with fast-lock Omega clamps (1/4 turn on the base)
- Optional safety chain

ELECTRICAL:

Operating voltage:

- 100-240V, 50/60 Hz

Power Supply:

- Electronic auto range with active PFC

MAX power consumption:

- Max 1900W (19A) @ 100V - 2150W (9A) @ 240V

THERMAL SPECIFICATION:

MAX Ambient temperature: • 45°C (113°F)

Min Ambient Temperature: • -20°C (-4°F)

MAX temp. of the ext. surface • 90°C (194 °F)

Total heat dissipation • 6500 BTU/hr ±10% / 6900 kJ/hr ±10%

SAFETY SPECIFICATIONS:

Min. dist. of illum. objs: • 8 m (26' 2" In)

Min. dist. from flamm. mat.: • 0,2 m (8' In)

Protections:

- Thermally protected power supply (overheating and cooling failure)
- Forced ventilation with axial fans and heatsink
- Battery fuse: T6.3A 250V 5x20mm
- Main fuse: 20A 250V 6,3x32mm

COMPLIANCE:

CE Marking (in conformity to the following):

- 2014/53/EU - Radio Equipment Directive (RED)
- 2011/65/EU - Restriction of the use of certain hazardous substances (RoHS)
- 2009/125/EC - EcoDesign requirements for Energy-related Products (ErP)

UKCA conforms to UK regulations:

- S.I. 2017 N.1206
- S.I. 2012 N.3032
- S.I. 2021 N.745

cETLus LISTED:

- UL 1573:2003
- CSA C22.2 N.166:2015

PACKAGING:

- Carton box + Polystyrene
- Carton box + Foam shell
- Flight case + Foam shell

WEIGHT & SIZES:

Weight: • 56,9 Kg (125.4 lbs)

Base dim.s: • 502 x 470 mm
• 19,7 x 18,5 In

Height with vert. head (h): • 885 mm
• 34,80 In

Dist. b/t 2 fixt: • 760 mm
• 29,9 In

Max size: • 501,5 x 470 mm
• 19,74 x 18,5 In

ACCESSORIES:

Omega bracket: • 2x183102/805 (Included)

ETL Power: • CAB0NL/802 (Included)*
* Cord 1.5 m (bare end with IP65 PowerConTrue1 conn.)

Flight case: • CF1043 (Optional)

Flight case + foam shell (2 pos.): • CF1043F (Optional)

Safety Chain: • 105041/001 (Optional)

Clamp: • C21070 (Optional)

WARNING: THE INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY CLAY PAKY S.R.L.