



FRESNEL 4 FC



80W Full Spectrum RGBMA LED 4" Fresnel with Zoom

DATA SHEET



KEY FEATURES

- 80W RGBMA LED Engine
- 2226 Total Fixture Lumen Output (Sphere)
- 10° to 42° Wide Manual Zoom
- Stand-Alone control with Encoder and LED Display
- Smooth 16-bit Selectable Dimming Modes and Curves
- LED Refresh Rate Adjustment
- Flicker Free Operation for TV and FILM
- RDM (Remote Device Management)
- 8-leaf Barn Doors and Gel Frame Included

The **KL FRESNEL 4 FC™** is a full-color-spectrum LED fixture that provides high output, precise color temperature control, full-spectrum color rendering, and even wash coverage. Optimized for the tunable white light requirements of Film and Television, it is an ideal key and fill light source for many situations requiring outstanding performance and color quality, while offering a wide array of rich saturated colors and subtle pastels.

The **KL FRESNEL 4 FC** incorporates a highly efficient 5-in-1 (RGBMA) LED engine with a manual zoom range of 10° to 45°. Remotely adjustable LED refresh frequency makes this unit the perfect choice for today's fast-paced production environments. Rugged and portable, the fixture can be mounted on a stand or suspended using any standard clamp. It is fully self-contained without the need for an external power supply and offers locking power pass-through for easy linking of multiple units.

The **KL FRESNEL 4 FC** can be operated through industry-standard DMX protocols and has full RDM support. In addition, it offers manual access using the included encoders and display, providing instant control of Intensity, Color temperature, Green shift, and other important settings. The display and encoders are conveniently positioned at the bottom side of the fixture to ensure unobstructed access while mounted on a stand.



Specifications are subject to change without notice ©Elation Professional 08/12/2025
Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu



FRESNEL 4 FC



80W Full Spectrum RGBMA LED 4" Fresnel with Zoom

SPECIFICATIONS

SOURCE

80W 6000K RGBMA LED Engine

50,000 Hour Average LED Life*

*May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

Total Lumen Output:

2226 (Integrating Sphere)

2174 (Goniometer)

CRI 94.2

TLCI 87

Zoom Range 10° - 45°

Beam Angle 11° - 47.6°

Field Angle 21.5° - 72.8°

EFFECTS

Manual Zoom

Electronic Dimmer and Strobe

Variable 16-bit Dimming Modes and Curves

COLOR

RGBMA Color Array

CMY Emulation

16bit Fully Variable CCT 2400K - 8500K

Green/Magenta Shift

Dim-to-Warm Fade

Virtual Gel Swatch Book

CONTROL / CONNECTIONS

9 DMX Channel Modes (1, 2, 6, 11, 18, 19, 9, 14, 15)

Manual and DMX Controlled Dimmer, Color

Direct Access Encoder

4 Button Control Panel, LED Display

RDM (Remote Device Management)

3/5pin DMX and IP65 Locking Power In/Out Connection

SIZE / WEIGHT

Length: 7.5" (190mm)

Width: 12.3" (312.8mm)

Vertical Height: 8.8" (223mm)

Weight: 8.2 lbs / 3.71 kg

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz

85W Max Power Consumption

Power Thru Capacity: 11A (14 units @110V;

31 units @240V)

5°F to 113°F (-15°C to 45°C)

BTU/hr (+/- 10%) 289.85

INCLUDED ITEMS

Gel Frame

8-leaf Barn Doors

IP65 Locking Power Cable

Safety Cable

APPROVALS / RATINGS

CE | cETLus | IP20 | FCC | UKCA



Specifications are subject to change without notice ©Elation Professional 08/12/2025

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu



FRESNEL 4 FC



ELATION®


80W Full Spectrum RGBMA LED 4" Fresnel with Zoom

ORDERING INFORMATION

SKU (US)	SKU (EU)	DESCRIPTION
KLF861-1	1236100194	KL Fresnel 4 FC
SIP139	N/A	IP65 Rated Twist Lock Power Cable, 10ft (3m)*
TOU027	N/A	Tour Link 5pin 10ft Tour Grade DMX Data Cable
TRIGGER CLAMP	1741000032	Heavy Duty Hook Style Clamp
KLF135	N/A	Universal Snap Bag



UNIT DIMENSIONS

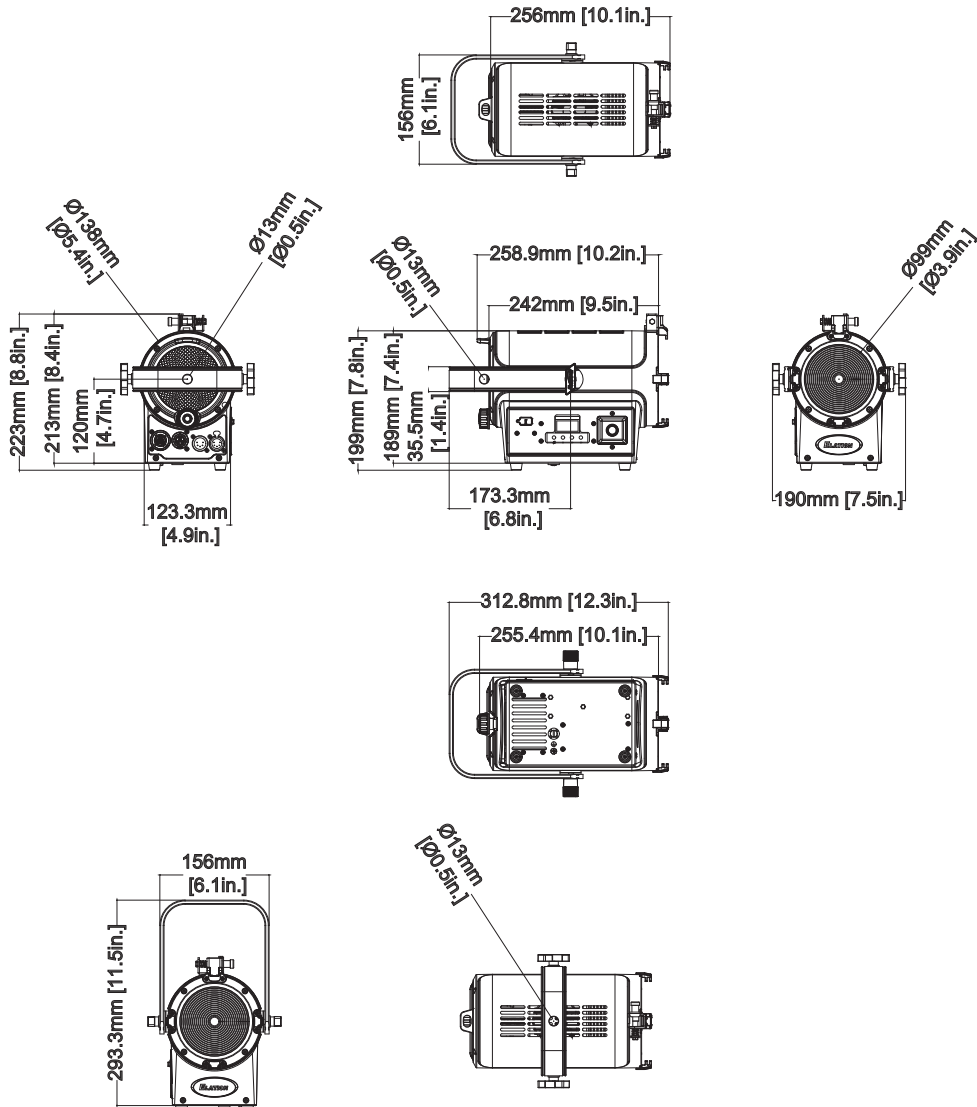

Specifications are subject to change without notice ©Elation Professional 08/12/2025

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu