

# PULSAR PLUS S2

*Dual Possibilities. Supreme Brightness.*

**SPEC SHEET**



Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026

**Acme®**

# PULSAR PLUS S2

*Dual Possibilities. Supreme Brightness.*

**SPEC SHEET**

## FIXTURE OVERVIEW

- The ACME **PULSAR PLUS S2** is the upgraded evolution of the highly acclaimed PULSAR S2, delivering greater brightness, IP66-rated durability, and even more creative possibilities. Its dual-face head design combines beam, strobe, pixel, and wash effects, while infinite pan/tilt movement unlocks maximum creative flexibility.
- The front of the head boasts four 150W RGBL LEDs, delivering powerful beams and uniform washes through a motorized zoom from 3.5° to 24°. This section produces a remarkable 10,500 lumens of output, offering higher brightness than the PULSAR S2. These LEDs are covered by a large outer lens, ensuring stunning optical performance as well as easy cleaning and maintenance. A standout feature is the kaleidoscope effect, powered by 150W RGBL LEDs, producing vivid, multi color textures that enhance stage visuals.
- The rear of the head features a pixel/strobe section with 160 x 3W CW LEDs and 192 x 0.5W RGB LEDs, along with a beam section with 16 x 10W CW LEDs. For added creativity, the **PULSAR PLUS S2** is equipped with ACME's patented electronic frost system, applied to both the pixel and 10W beam sections. This enables seamless transitions from sharp beams to soft looks.
- With expanded creative potential and a rugged IP66 housing, the **PULSAR PLUS S2** pushes the boundaries of the original design, making it the perfect choice for large-scale outdoor productions.



## FEATURE HIGHLIGHTS

- Light Source:
  - Beam/Wash: 4 x 150W RGBL LEDs
  - 10W Beam: 16 x 10W CW LEDs
  - Strobe: 160 x 3W CW LEDs
  - Pixel: 192 x 0.5W RGB LEDs
- Beam Angle:
  - Beam/Wash: 3.5°-24°
  - 10W Beam: 3.5°
  - Strobe: 108°
  - Pixel: 115°
- Field Angle:
  - Beam/Wash: 5°-30°
  - Kaleidoscope Effect: 14°, 24°
- Fixture Luminous Output:
  - Auto Mode:
    - Beam/Wash: 10,500 lumens
    - 10W Beam: 2,700 lumens
    - Strobe: 28,500 lumens
    - Pixel: 3,800 lumens
  - Quiet Mode:
    - Beam/Wash: 5,400 lumens
    - 10W Beam: 1,200 lumens
    - Strobe: 18,000 lumens
    - Pixel: 2,600 lumens
  - Super Quiet Mode:
    - Beam/Wash: 3,900 lumens

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026



# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.

## SPEC SHEET

### FEATURE HIGHLIGHTS

- 10W Beam: 400 lumens
- Strobe: 6,500 lumens
- Pixel: 900 lumens
- Color Temperature Output of Fixture: 8,000K
- Variable CTO ranging from 2,500K-8,000K
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100% (4 user selectable dimming curves)
- DMX Controllable Smart Glass technology for Pixel and 10W Beam Sections
- Built-in color macro effects
- Motorized linear zoom system
- IP66 rated

### TECHNICAL SPECIFICATIONS

#### Model

- Model Name: PULSAR PLUS S2
- Model Code: CM S2 IP

#### Light Source

- Light Source:
  - Beam/Wash: 4 x 150W RGBL LEDs
  - 10W Beam: 16 x 10W CW LEDs
  - Strobe: 160 x 3W CW LEDs
  - Pixel: 192 x 0.5W RGB LEDs
- Color Temperature Output of Fixture: 8,000K
- Life Expectancy: 20,000 hours\*
- \*Source manufacturer specification

#### Photometric Data

- Fixture Luminous Output:
  - Auto Mode:
    - Beam/Wash: 10,500 lumens
    - 10W Beam: 2,700 lumens
    - Strobe: 28,500 lumens
    - Pixel: 3,800 lumens
  - Quiet Mode:
    - Beam/Wash: 5,400 lumens
    - 10W Beam: 1,200 lumens
    - Strobe: 18,000 lumens
    - Pixel: 2,600 lumens
  - Super Quiet Mode:
    - Beam/Wash: 3,900 lumens
    - 10W Beam: 400 lumens

- Strobe: 6,500 lumens
- Pixel: 900 lumens
- CCT: 8,000K (+/- 200K)
- Ra: 83
- TM-30 Rf (IES TM-30-15 Fidelity Index): 87
- TM-30 Rg (IES TM-30-15 Fidelity Index): 105
- TLCI: 85

#### Optical System

- Frontal Lens: 90 x 90 mm
- Beam Angle:
  - Beam/Wash: 3.5°-24°
  - 10W Beam: 3.5°
  - Strobe: 108°
- Pixel: 115°
- Field Angle:
  - Beam/Wash: 5°-30°
  - Kaleidoscope Effect: 14°, 24°
- DMX Controllable Smart Glass technology for Pixel and 10W Beam Sections
- Patent No.:
  - CN216010577U
  - US11698183B1
  - DE202023101966U1
  - FR3134870B3

#### Control & Program

- 4 touch button control panel
- Display: LCD display

# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.

SPEC SHEET

## TECHNICAL SPECIFICATIONS

- Protocols: DMX, RDM, Art-Net, sACN, NFC
- Setting and Addressing: Display menu, RDM
- DMX Modes: 5
- DMX Channels: 43/153/139/195/27+168
- Firmware Upgrade: Upgrade via DMX link or USB stick

### Pan & Tilt

- Pan: Infinity
- Tilt: Infinity
- Automatic Pan/Tilt position correction
- Resolution: 16 bit
- Pan/Tilt lock

### Color Correction

- Linear CTO Color Correction: 2,500K-8,000K

### Zoom

- Motorized linear zoom system

### Electrical

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 1,200W
- Power In/Out: Waterproof power connector in/out
- Data In/Out: 3-pin or 5-pin waterproof XLR, waterproof RJ45 connector

### Physical

- Weight: 20.5 kg (45.2 lbs)
- Length (Head): 272 mm (10.7")
- Length (Base): 310 mm (12.2")
- Width (Across Yoke): 309 mm (12.2")
- Height (Head Up): 496 mm (19.5")

### Construction

- Housing: Magnesium alloy
- Color: Black
- Protection Rating: IP66

### Work Environment

- Maximum Ambient Temperature: 45°C
- Minimum Operating Temperature: -20°C
- Maximum Surface Temperature: 70°C

### Acoustic Data

- Noise Level:
  - Auto Mode: 49 dB(A) @ 1 m
  - Quiet Mode: 38 dB(A) @ 1 m
  - Super Quiet Mode: 35 dB(A) @ 1 m

### Installation

- Universal working position
- 2 omega brackets
- Safety cable attachment point

### Approvals

- CE compliant
  - EMC directive 2014/30/EU
  - LVD directive 2014/35/EU
- UKCA compliant
  - Electromagnetic Compatibility Regulations 2016
  - Electrical Equipment (Safety) Regulations 2016
- cETLus compliant
  - UL 1573
  - CSA C22.2 #166



# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.

SPEC SHEET

## INCLUDED ITEMS

### Included Items

- Digital user manual
- Power cable
- 2 omega brackets (3002003002)

## ORDERING INFORMATION

### Optional Accessories (With Order Code)

- Flight Case:  
Standard: Four-pack loader case (63584350)  
North American Standard:  
Four-pack loader case (63584378)
- Clamp: C-150B (2060001625-C)
- Safety Cable: SW-05 (2060001603-E)
- Signal Cable: 3-pin waterproof signal cable (3017013468) or 5-pin waterproof signal cable (3017013473)

### Carton Dimensions

- Width : 405 mm (15.9")
- Depth : 385 mm (15.2")
- Height : 660 mm (26")
- Weight :  
G.W.: 24.5 kg (54 lbs) (one-pack loader carton)



3-pin/5-pin waterproof  
signal cable: 3017013468/3017013473



SW-05: 2060001603-E



C-150B: 2060001625-C



Standard(Four-pack loader case): 63584350

# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.

SPEC SHEET

## (STANDARD) FLIGHT CASE

### APPLICABLE MODELS

- PULSAR PLUS S2 (CM S2 IP)

### ORDER CODE

- 63584350 PULSAR PLUS S2 (CMS2 IP)

### CASE WEIGHT

- 58 kg (127.9 lbs)

### MEAS





- 1,000 x 609 x 785 mm (39.4" x 24.0" x 30.9")

### LOADING Q'TY

- Four-pack loader case

### MAXIMUM STACKING

- 3 stacks

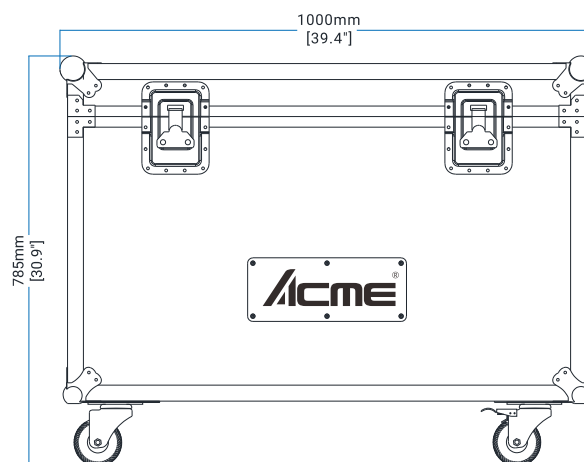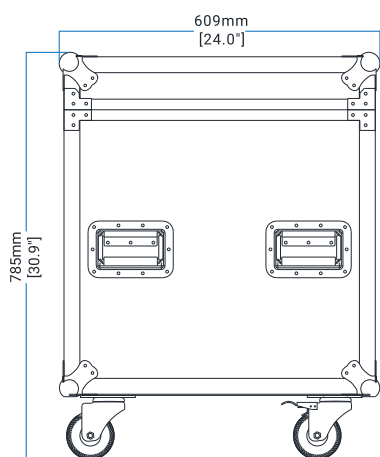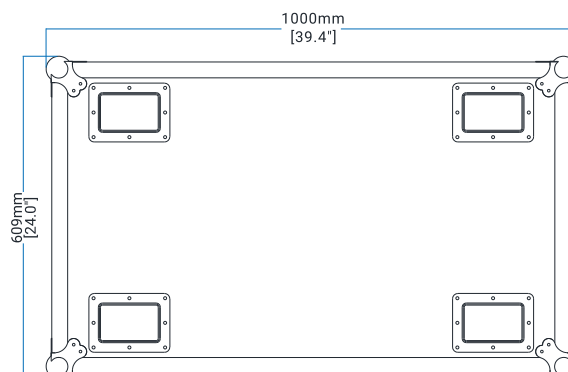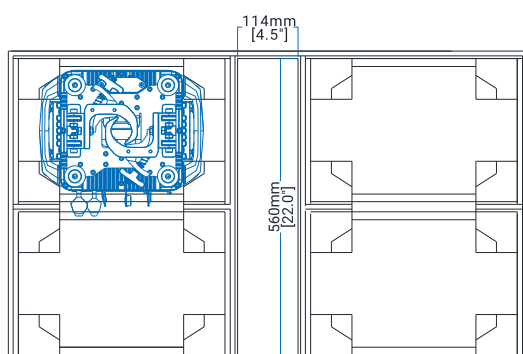

ACASE by ACME Version: 2026126-A

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026


ACME®

# PULSAR PLUS S2

*Dual Possibilities. Supreme Brightness.*

**SPEC SHEET**

## DIMENSIONS

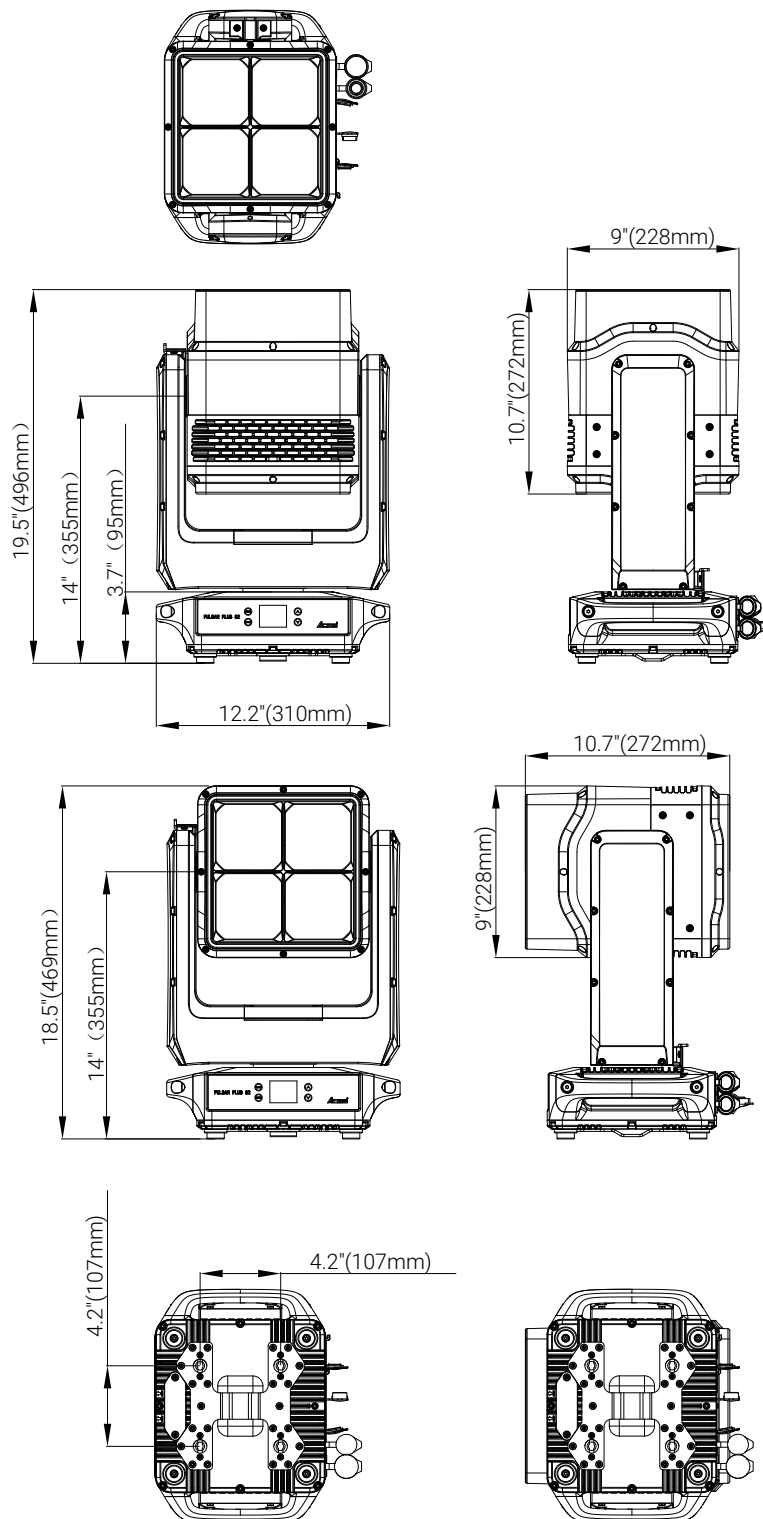

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026


**Acme®**

# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.

SPEC SHEET

## HANGING DIMENSIONS

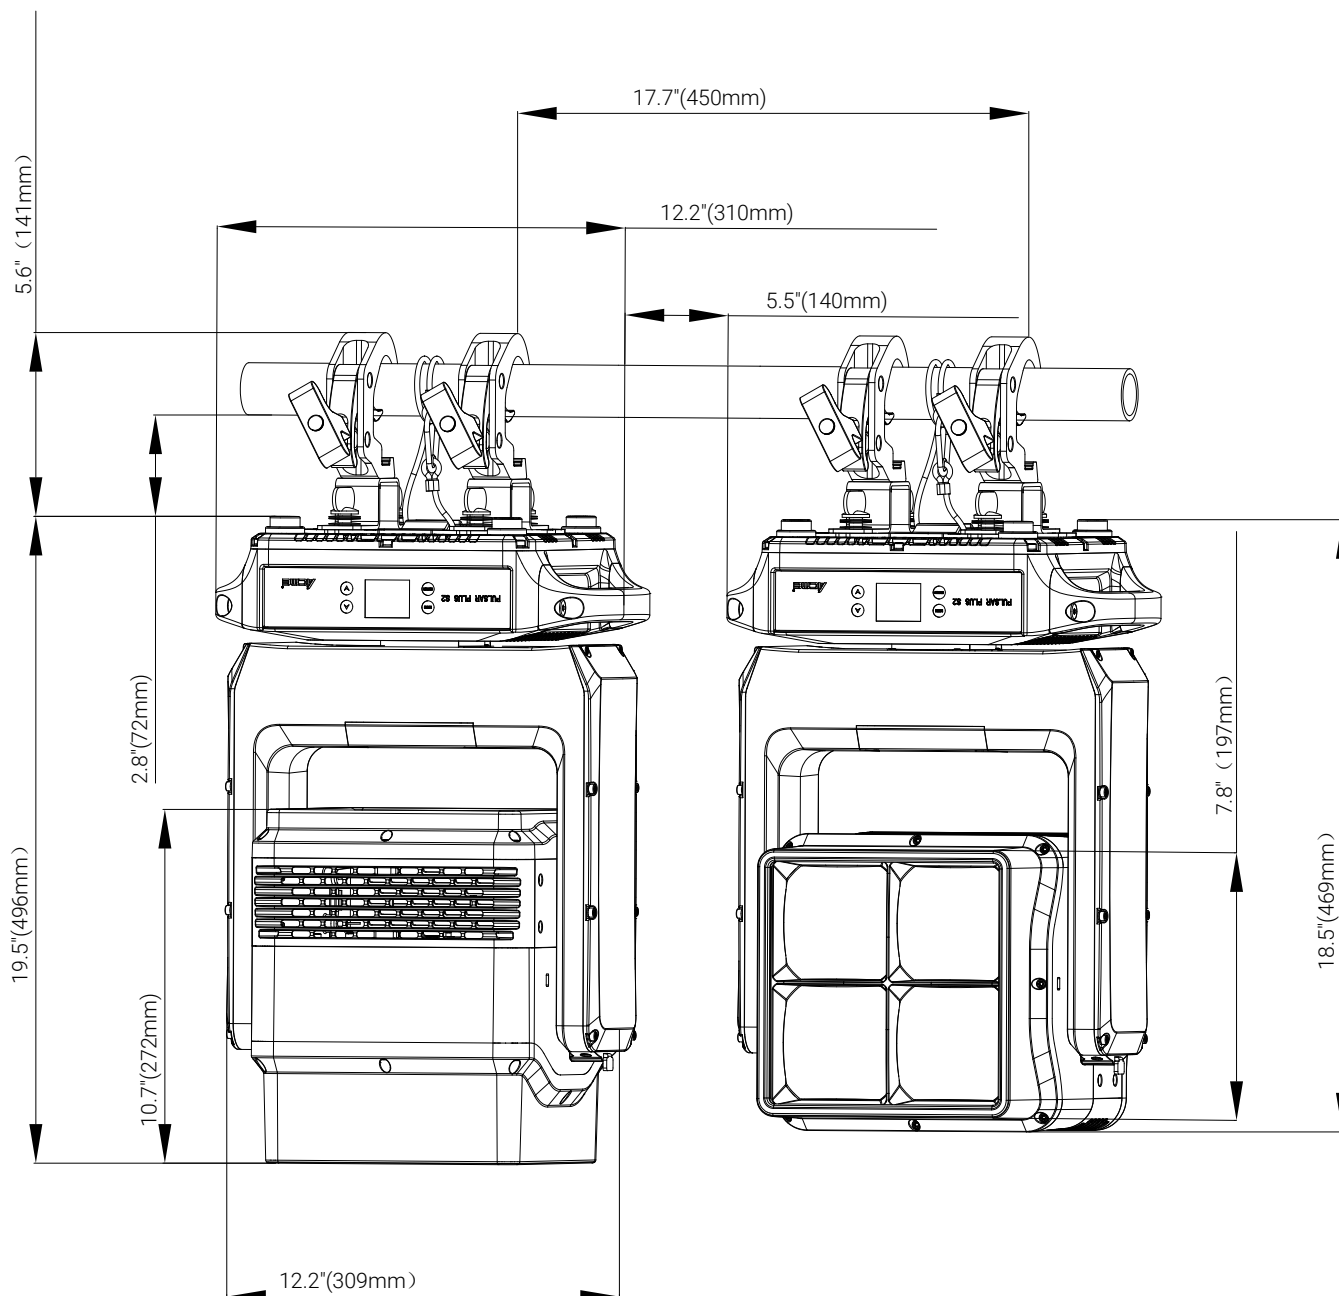

Foshan YiFeng Electric Industrial Co., Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026

**Acme®**

# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.


SPEC SHEET

## PHOTOMETRIC

### Auto Mode

Beam Angle (RGBL):


Distance m (ft)      5 (16.4)                      10 (32.8)                      15 (49.2)                      20 (65.6)                      25 (82)

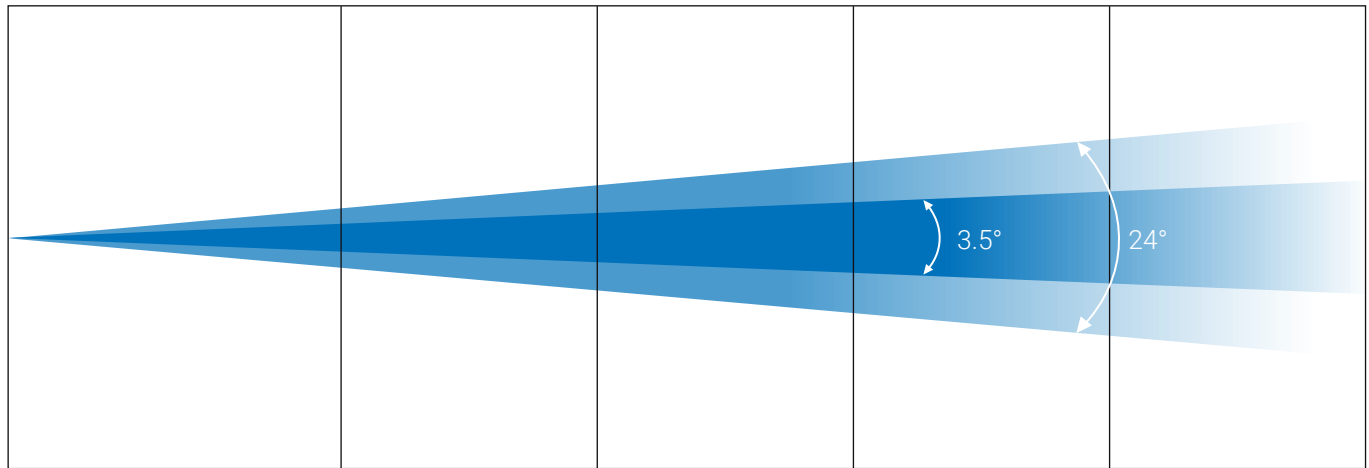

|                 |          |            |            |             |             |
|-----------------|----------|------------|------------|-------------|-------------|
| 3.5° RGBL Lux   | 80,800   | 20,200     | 8,978      | 5,050       | 3,232       |
| Diameter m (ft) | 0.6(2)   | 1.2(3.9)   | 1.8 (5.9)  | 2.4 (7.8)   | 3(9.8)      |
| 24°RGBL Lux     | 3,768    | 942        | 419        | 236         | 151         |
| Diameter m (ft) | 2.6(8.5) | 5.2 (16.9) | 7.8 (25.4) | 10.5 (34.1) | 13.1 (42.6) |

Beam Angle (10W CW):

Distance m (ft)      5 (16.4)                      10 (32.8)                      15 (49.2)                      20 (65.6)                      25(82)

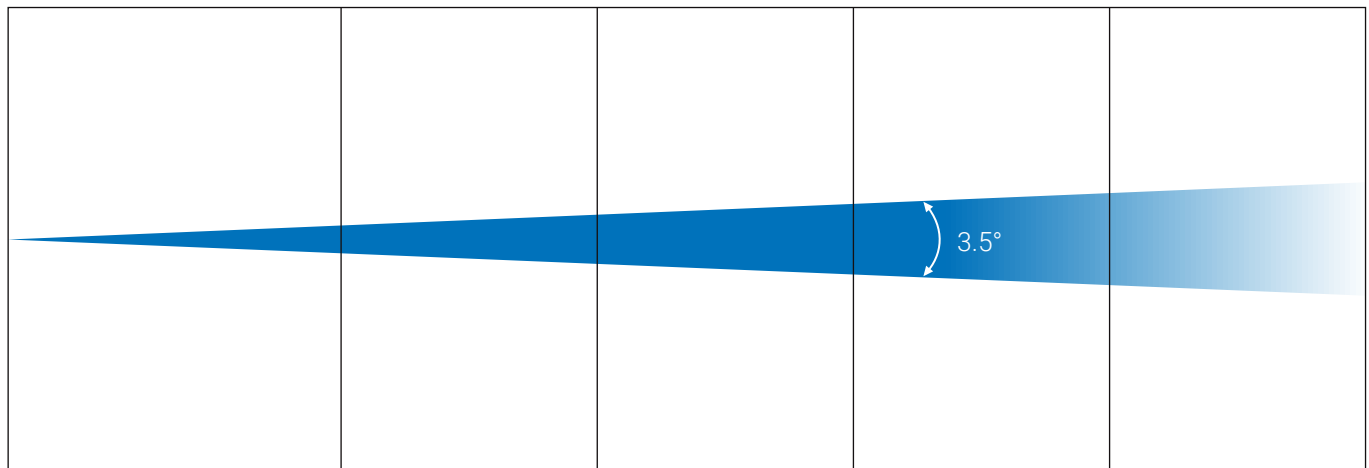

|                 |        |          |           |           |          |
|-----------------|--------|----------|-----------|-----------|----------|
| 3.5° 10W CW Lux | 31,720 | 7,930    | 3,524     | 1,982     | 1,268    |
| Diameter m (ft) | 0.6(2) | 1.1(3.6) | 1.7 (5.5) | 2.2 (7.2) | 2.8(9.1) |


# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.


SPEC SHEET

## PHOTOMETRIC

Beam Angle (3W CW):

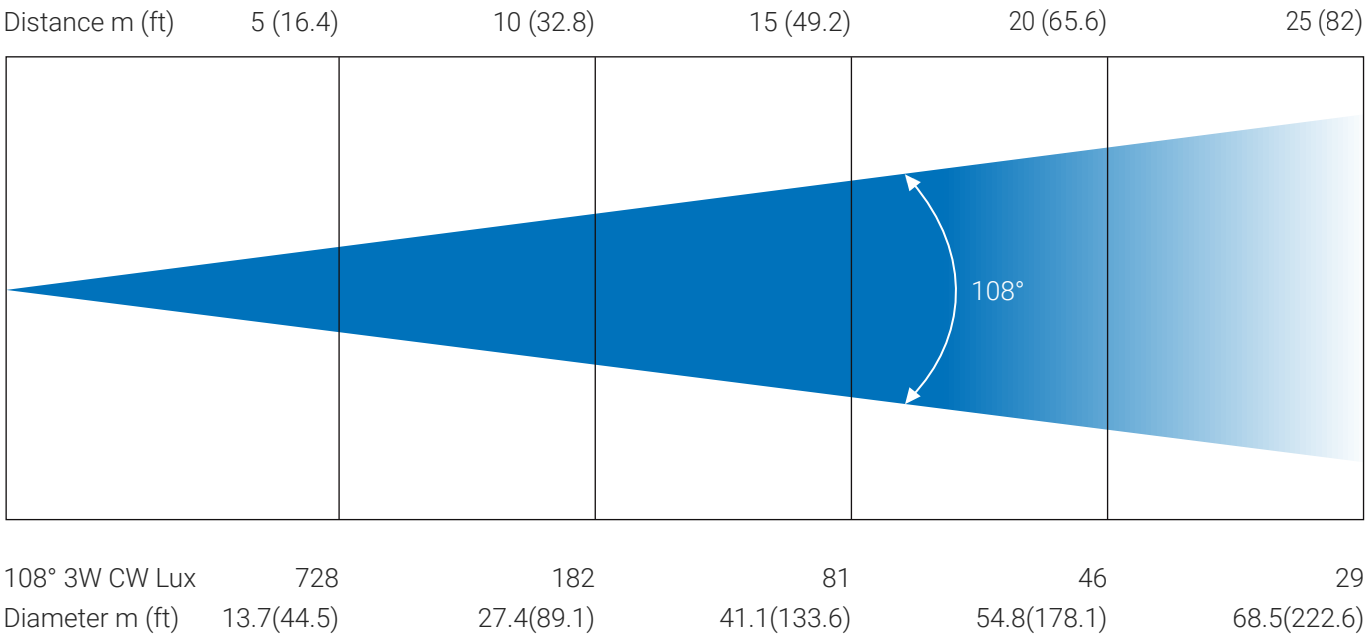

Beam Angle (RGB):

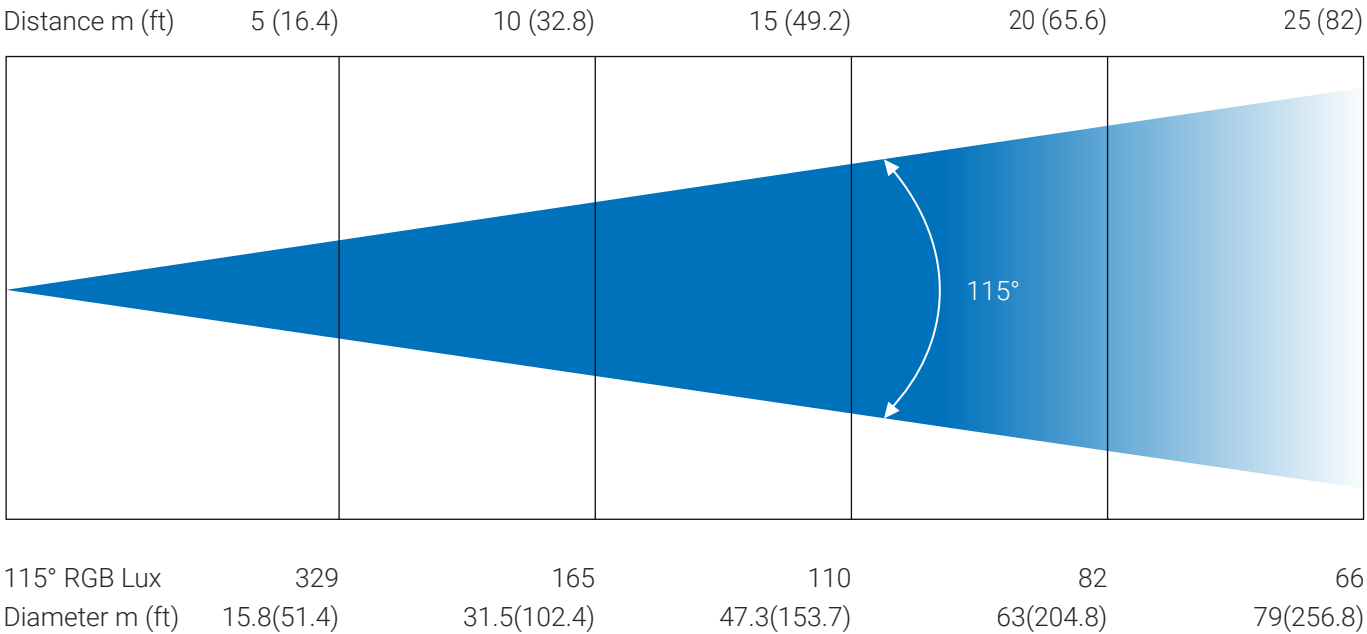

# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.


SPEC SHEET

## PHOTOMETRIC

### Quiet Mode

Beam Angle (RGBL):


Distance m (ft)      5 (16.4)                      10 (32.8)                      15 (49.2)                      20 (65.6)                      25 (82)

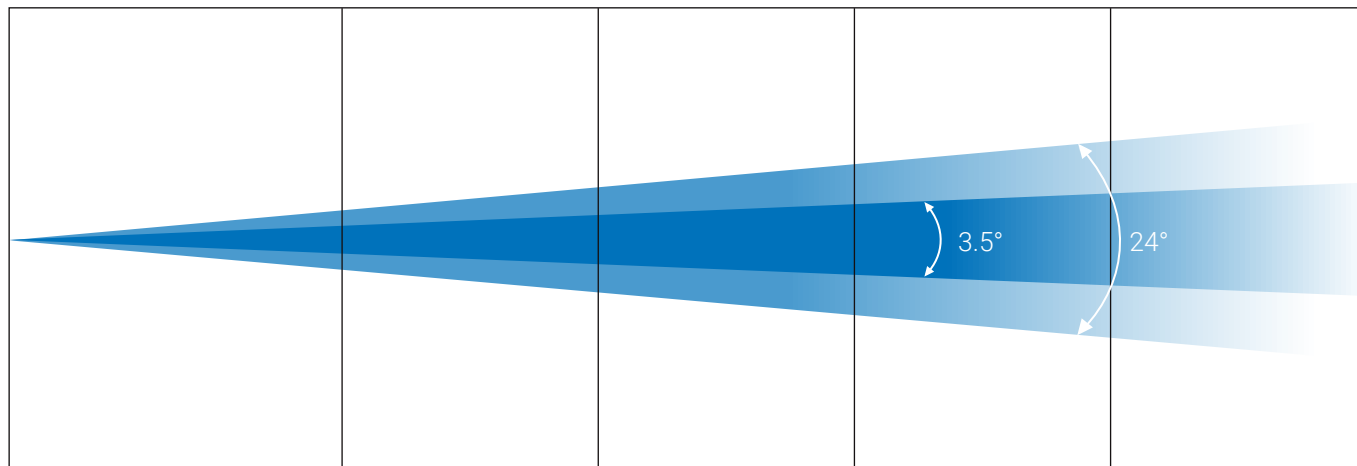

|                 |          |            |            |             |             |
|-----------------|----------|------------|------------|-------------|-------------|
| 3.5° RGBL Lux   | 41,916   | 10,479     | 4,657      | 2,620       | 1,677       |
| Diameter m (ft) | 0.6(2)   | 1.2(3.9)   | 1.8 (5.9)  | 2.4 (7.8)   | 3(9.8)      |
| 24°RGBL Lux     | 2,516    | 629        | 280        | 157         | 100         |
| Diameter m (ft) | 2.6(8.5) | 5.2 (16.9) | 7.8 (25.4) | 10.5 (34.1) | 13.1 (42.6) |

Beam Angle (10W CW):

Distance m (ft)      5 (16.4)                      10 (32.8)                      15 (49.2)                      20 (65.6)                      25(82)

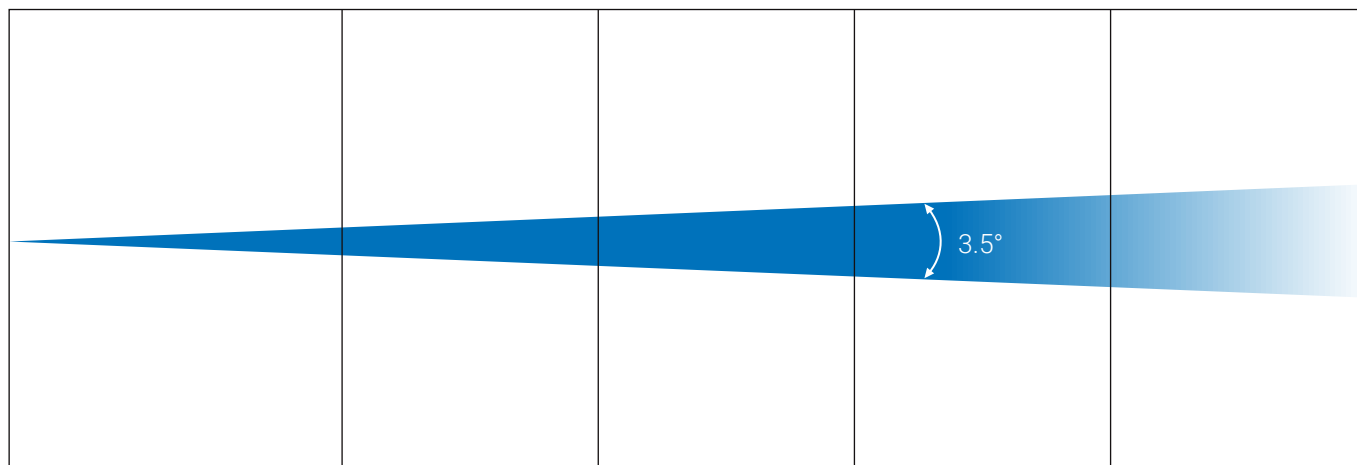

|                 |        |          |           |           |          |
|-----------------|--------|----------|-----------|-----------|----------|
| 3.5° 10W CW Lux | 13,840 | 3,460    | 1,538     | 865       | 554      |
| Diameter m (ft) | 0.6(2) | 1.1(3.6) | 1.7 (5.5) | 2.2 (7.2) | 2.8(9.1) |

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026




# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.


SPEC SHEET

## PHOTOMETRIC

Beam Angle (3W CW):

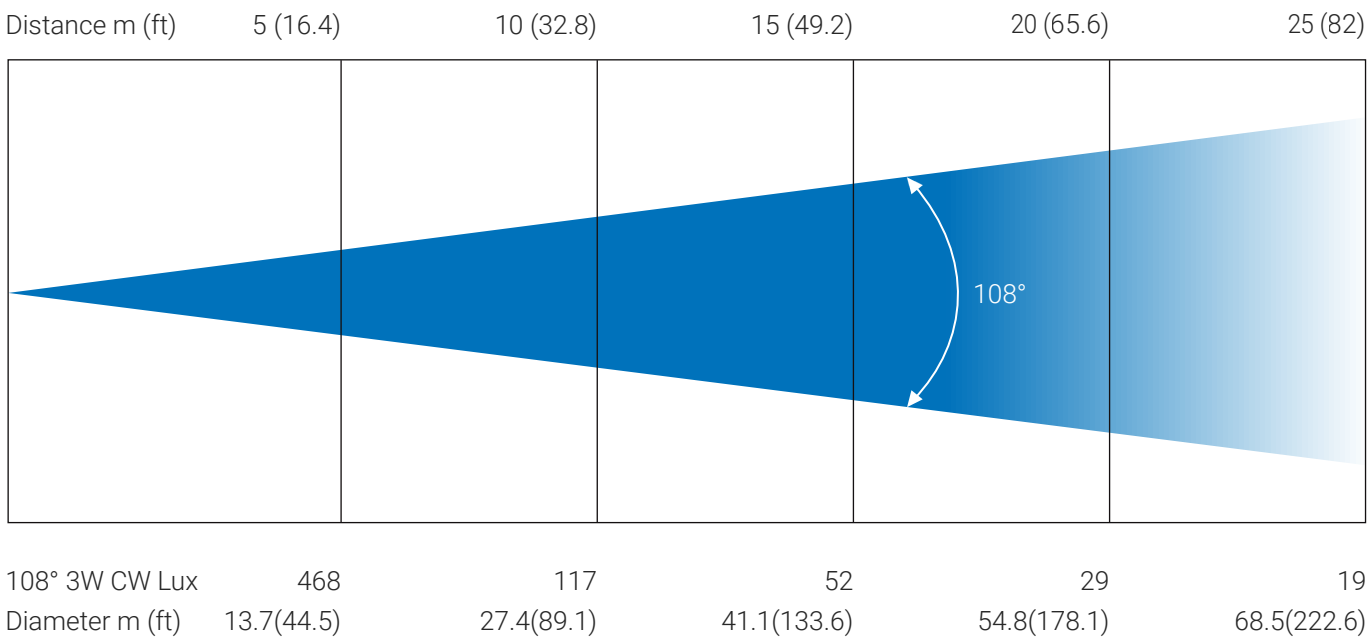

Beam Angle (RGB):

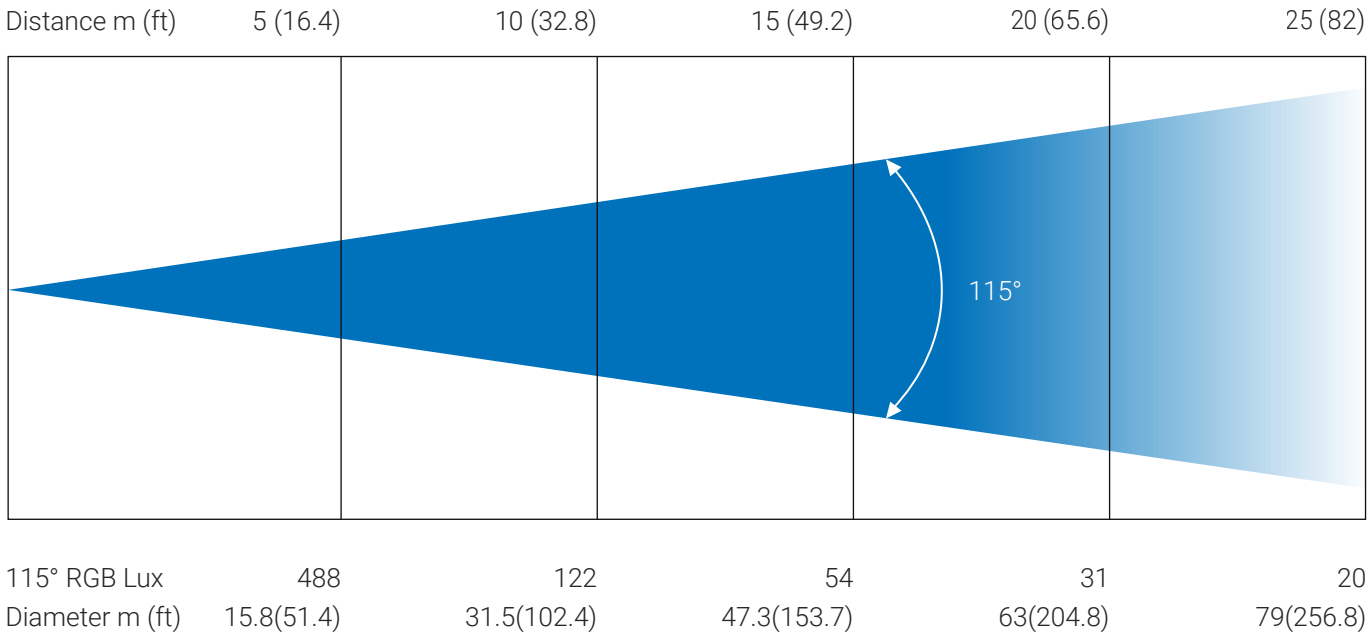

# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.


SPEC SHEET

## PHOTOMETRIC

### Super Quiet Mode

Beam Angle (RGBL):


Distance m (ft)      5 (16.4)                      10 (32.8)                      15 (49.2)                      20 (65.6)                      25 (82)

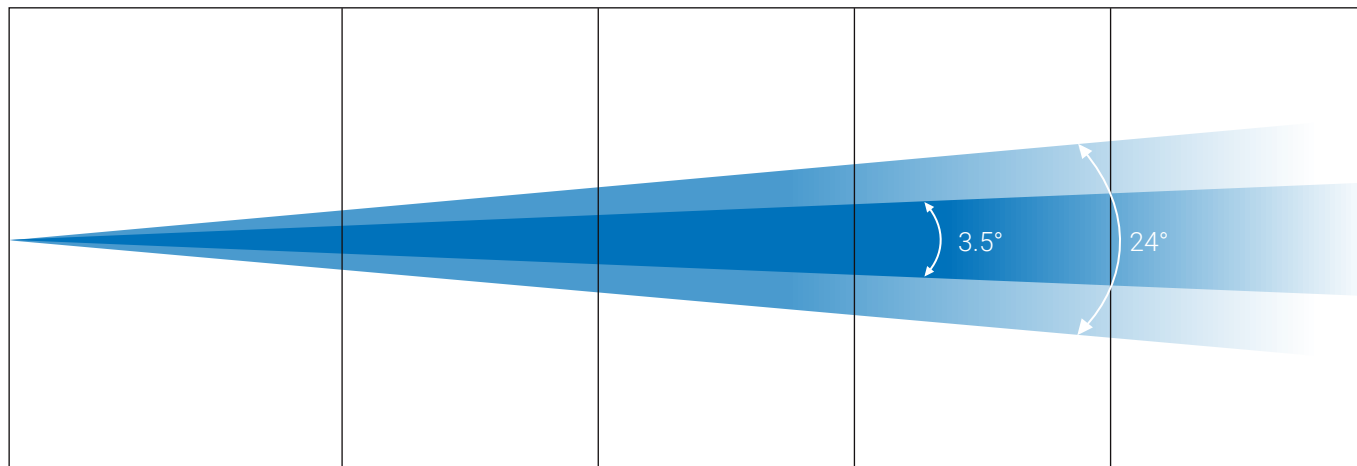

|                 |          |            |            |             |             |
|-----------------|----------|------------|------------|-------------|-------------|
| 3.5° RGBL Lux   | 29,668   | 7,417      | 3,296      | 1,854       | 1,187       |
| Diameter m (ft) | 0.6(2)   | 1.2(3.9)   | 1.8 (5.9)  | 2.4 (7.8)   | 3(9.8)      |
| 24°RGBL Lux     | 1,468    | 367        | 163        | 92          | 59          |
| Diameter m (ft) | 2.6(8.5) | 5.2 (16.9) | 7.8 (25.4) | 10.5 (34.1) | 13.1 (42.6) |

Beam Angle (10W CW):

Distance m (ft)      5 (16.4)                      10 (32.8)                      15 (49.2)                      20 (65.6)                      25(82)

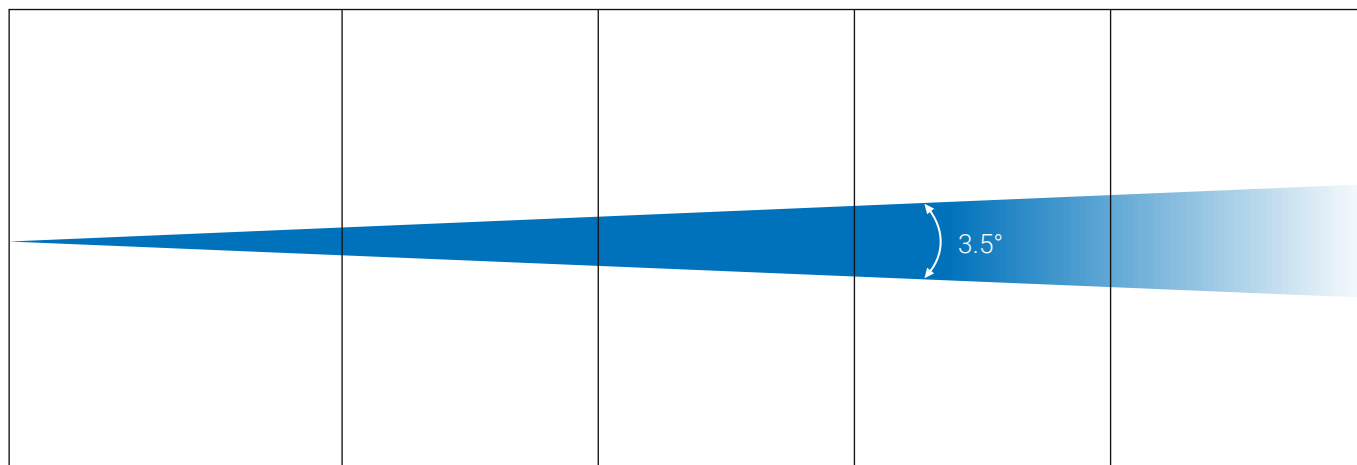

|                 |        |          |           |           |          |
|-----------------|--------|----------|-----------|-----------|----------|
| 3.5° 10W CW Lux | 8,720  | 2,180    | 969       | 545       | 349      |
| Diameter m (ft) | 0.6(2) | 1.1(3.6) | 1.7 (5.5) | 2.2 (7.2) | 2.8(9.1) |

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026




# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.


SPEC SHEET

## PHOTOMETRIC

Beam Angle (3W CW):

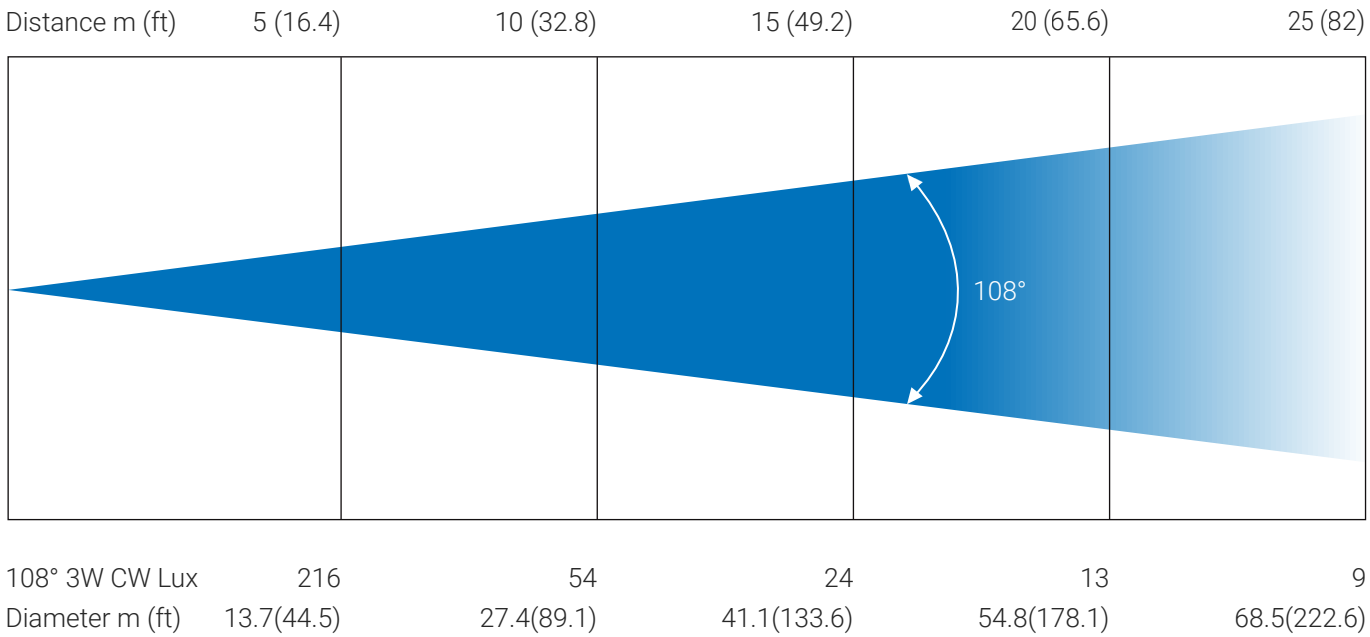

Beam Angle (RGB):

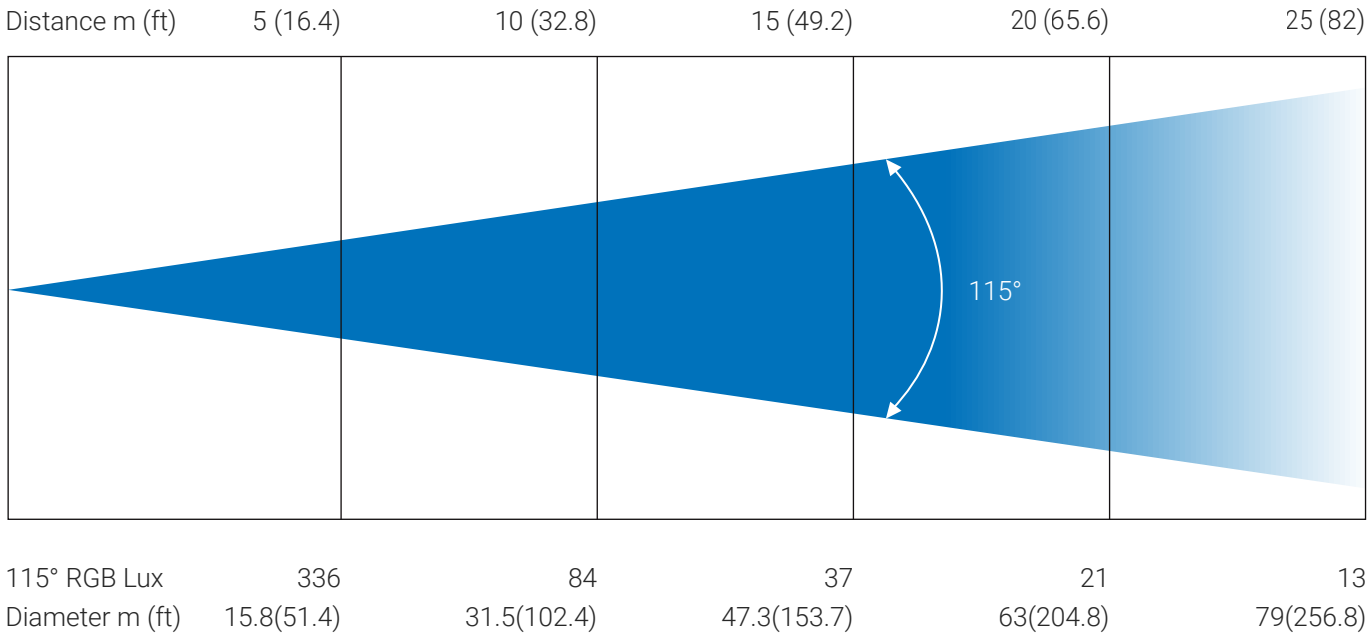


# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.


SPEC SHEET

## PHOTOMETRIC REPORT – CHROMATICITY


### Spectral Distribution

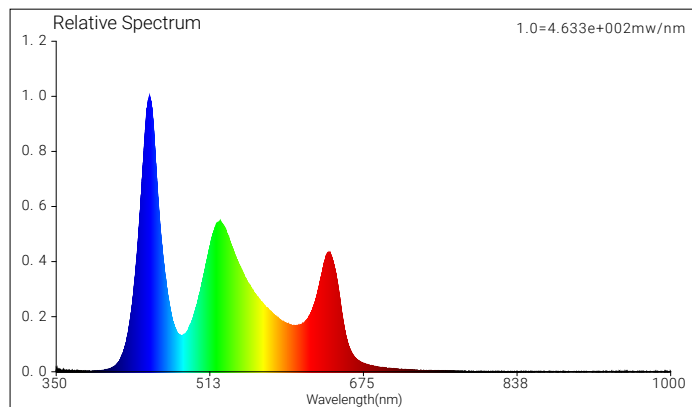


### CRI: 83.1 (R1-R8)

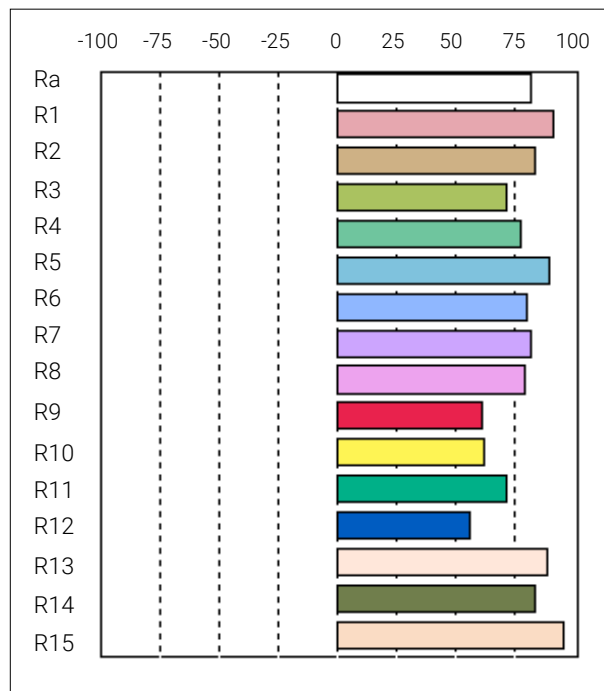

### CIE 1931 EVERFINE

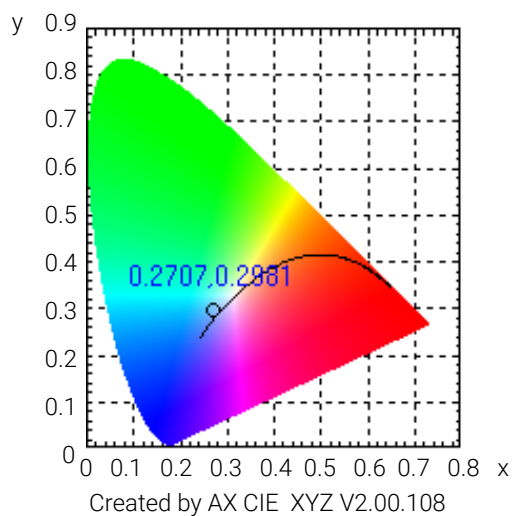

### CQS: 86.6 (Q1-Q8)

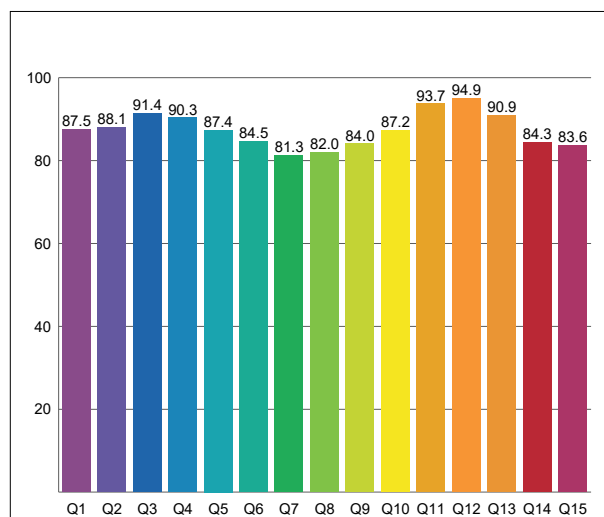

#### CRI C Values

| C1   | C2   | C3   | C4   | C5   | C6   | C7   | C8   | C9   | C10  | C11  | C12  | C13  | C14  | C15  | C16  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 93.0 | 84.7 | 72.5 | 79.1 | 90.6 | 81.5 | 83.1 | 80.4 | 62.5 | 63.7 | 72.6 | 57.4 | 89.7 | 84.8 | 97.2 | 83.1 |

#### TM30 R Values

| R1   | R2   | R3   | R4   | R5   | R6   | R7   | R8   | R9   | R10  | R11  | R12  | R13  | R14  | R15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 93.0 | 84.7 | 72.5 | 79.1 | 90.6 | 81.5 | 83.1 | 80.4 | 62.5 | 63.7 | 72.6 | 57.4 | 89.7 | 84.8 | 97.2 |

#### CQS Q Values

| Q1   | Q2   | Q3   | Q4   | Q5   | Q6   | Q7   | Q8   | Q9   | Q10  | Q11  | Q12  | Q13  | Q14  | Q15  |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 87.5 | 88.1 | 91.4 | 90.3 | 87.4 | 84.5 | 81.3 | 82.0 | 84.0 | 87.2 | 93.7 | 94.9 | 90.9 | 84.3 | 83.6 |

#### Colour Parameters

| Color temperature | Color rendering index | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT               | CRI                   | TM30 Rf        | TM30 Rg     | CQS                 | x                         | y                         | u                | v                | $\Delta uv$                     |
| 10,525K           | 83.1                  | 87             | 105         | 86.6                | 0.2707                    | 0.2981                    | 0.1794           | 0.4445           | 0.0112                          |

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: [www.acmelighting.com](http://www.acmelighting.com) Email: [sales@acmelighting.com](mailto:sales@acmelighting.com)

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 07/07/2026

Acme®

# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.







SPEC SHEET

## PHOTOMETRIC REPORT – TM-30

TM-30 Rf (IES TM-30-15 Fidelity Index): 87

TM-30 Rg (IES TM-30-15 Fidelity Index): 105

| Hue Bin | Hue Angle       | Graphic shift(%) |        |     |
|---------|-----------------|------------------|--------|-----|
|         |                 | Rf               | Chroma | Hue |
| 1       | 0.0° – 22.5°    | 84               | 6      | -5  |
| 2       | 22.5° – 45.0°   | 86               | 2      | -7  |
| 3       | 45.0° – 67.5°   | 92               | 1      | -1  |
| 4       | 67.5° – 90.0°   | 93               | -1     | 2   |
| 5       | 90.0° – 112.5°  | 90               | 2      | 4   |
| 6       | 112.5° – 135.0° | 88               | 7      | 2   |
| 7       | 135.0° – 157.5° | 87               | 6      | -5  |
| 8       | 157.5° – 180.0° | 85               | 0      | -8  |
| 9       | 180.0° – 202.5° | 90               | -5     | -5  |
| 10      | 202.5° – 225.0° | 89               | -7     | 2   |
| 11      | 225.0° – 247.5° | 83               | -3     | 12  |
| 12      | 247.5° – 270.0° | 78               | 1      | 12  |
| 13      | 270.0° – 292.5° | 88               | 5      | 9   |
| 14      | 292.5° – 315.0° | 84               | 5      | 7   |
| 15      | 315.0° – 337.5° | 83               | 13     | 1   |
| 16      | 337.5° – 360.0° | 83               | 7      | -5  |

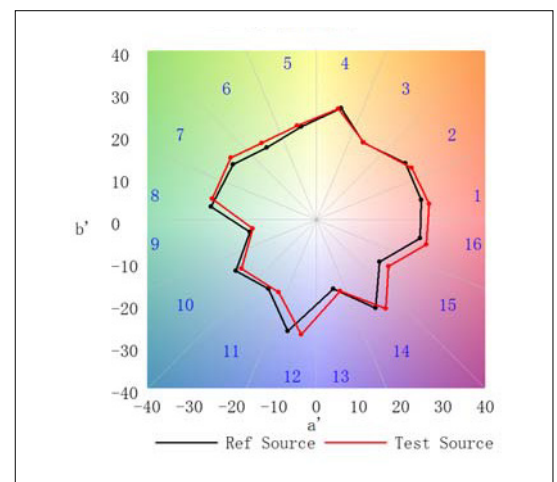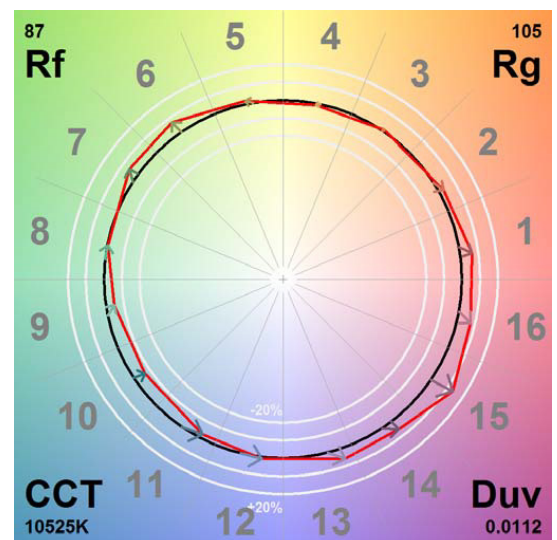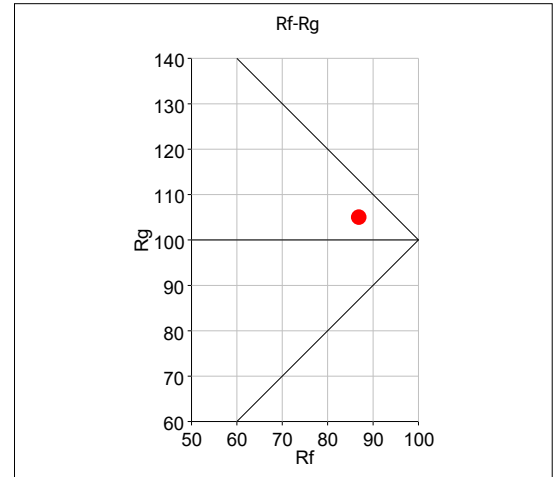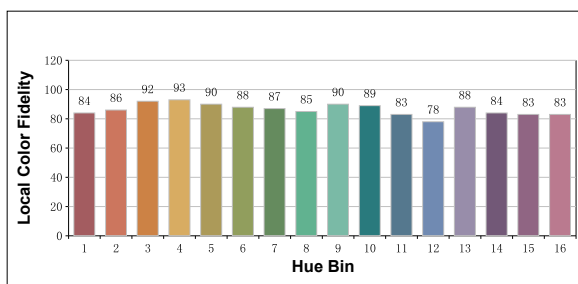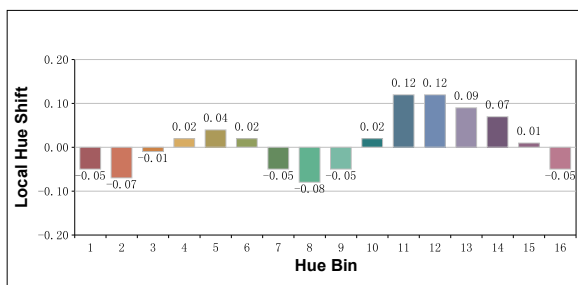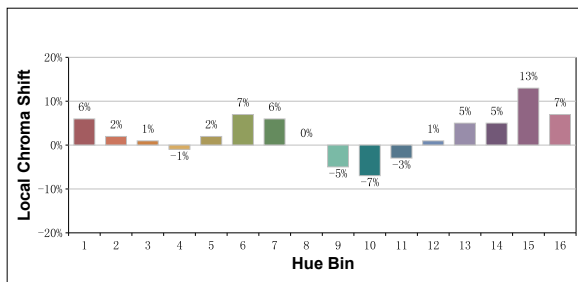


# PULSAR PLUS S2

Dual Possibilities. Supreme Brightness.

SPEC SHEET

## PHOTOMETRIC REPORT – TM-30

### Color Evaluation Sample

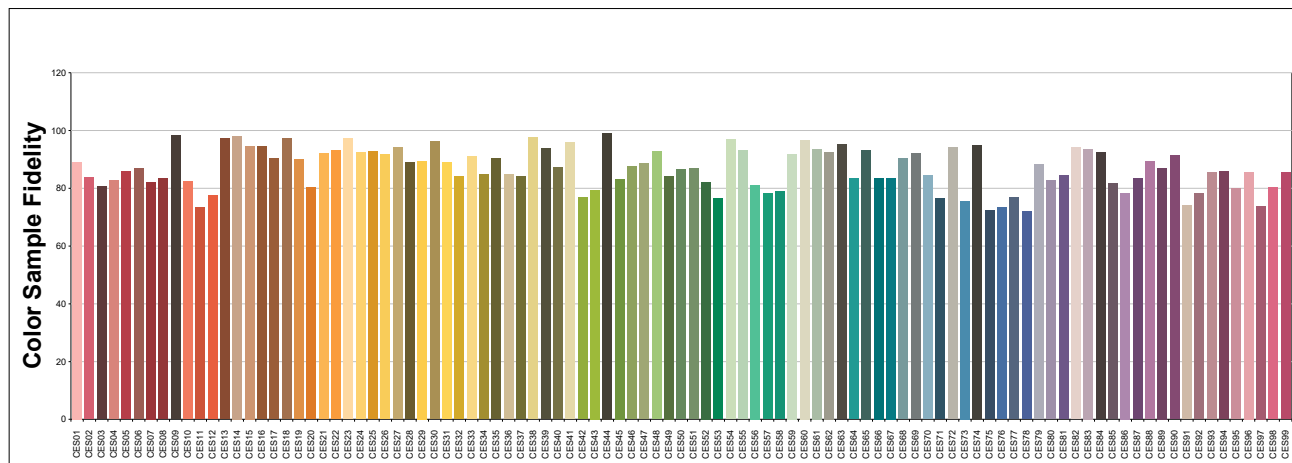

## PHOTOMETRIC REPORT – TLCI-85

### Color Evaluation Sample



| Sector | Lightness | Chroma | Hue |
|--------|-----------|--------|-----|
| R      | -3        | -2     | 0   |
| R/Y    | 0         | -1     | 0   |
| Y      | -1        | -1     | -1  |
| Y/G    | -1        | -2     | -2  |
| G      | -2        | -3     | 0   |
| G/C    | 0         | -2     | 3   |
| C      | 0         | -1     | 2   |
| C/B    | 0         | -1     | 0   |
| B      | 0         | -3     | -2  |
| B/M    | 0         | -2     | -1  |
| M      | -1        | -2     | -1  |
| M/R    | -2        | -2     | -1  |