



Kyalami, the first phosphor laser source luminaire in its Creative Solution series based on the MagicDot concept. The essential performance capability of Kyalami is based on its unique design, extreme miniaturization, and sleek cylindrical form, enabling multiple units to be mounted just centimetres apart

Within a compact 265 mm sphere, it houses a 100 W laser module, integrated cooling, and advanced optics. This next-generation, speckle-free laser source is engineered to deliver a D65 white point for perfect colour rendering. With an ultra-sharp 1° beam angle, exceptional native contrast, and a wide focus range, Kyalami redefines beam precision and adaptability for creative lighting applications.

★ KEY FEATURES

➤ Laser-Phosphor Converted Engine

A compact cluster of **blue laser diodes** emits a **narrow beam** approximately 18 mm in diameter. The blue beam passes through a **rotating phosphor wheel**, is absorbed by the phosphor and is then converted into broad-spectrum white light. The original narrow blue beam is replaced by a **wide, flooded white beam**. The white light must be shaped into an usable form. It travels through a **series of condenser lenses**. These lenses **narrow and collimate** the light beam. The result is a **collimated white light beam** exiting the front of the laser module.

➤ An Ultra-Sharp Beam Angle

Kyalami features a fixed 1-degree beam angle, delivering exceptional precision and intensity. Its advanced three-lens optical system enables an extreme range of focus, allowing the beam shape to be finely adjusted based on the operating distance. This ensures optimal performance and adaptability in any lighting environment.

➤ Advanced colour mixing

Kyalami features a highly innovative colour system, incorporating the same redesigned disc-based mixing technology introduced in the Ultimate series. It includes a high-definition, progressive CMY colour mixing system, along with a multi-position, instant-access colour wheel equipped with five correction filters and 17 complementary colour filters.

➤ Unmatched Graphic Effects

Kyalami delivers exceptional graphic capabilities, featuring a selection of 29 fixed metal gobos specifically designed to sculpt light in «beam» mode. These gobos can be combined with two independently controllable rotating prisms, enabling the creation of a wide variety of striking volumetric lighting effects.

➤ Compact Power, Maximum Impact

Kyalami's ultra-compact, cylindrical design—just 265 mm in diameter—makes it ideal for high-density installations where space is at a premium. Its extreme miniaturization and minimalist footprint allow multiple fixtures to be mounted just centimetres apart, unlocking new creative possibilities in tight configurations. Simplified waterproofing and seamless, continuous pan and tilt rotation enhance its sleek profile while enabling the creation of complex, dynamic lighting effects.

TECHNICAL SPECIFICATIONS

SOURCE	
Engine	LASER Phosphore
LASER Watts	100 W (total fixture use, see Electrical section)
LASER Engine Life (L70)	Up to 12,000 hours
LASER Refresh Rate	1.2 kHz, 2.4 kHz, 16 kHz, 25 kHz
Dimming	Electronic
Dimming Curves	Square & Linear
Dimming Control Options	Auto on/off dimmer smoothing when Snap effects
Strobe Speed	1-25 Hz Per Second
Strobe Modes	Strobe Effects / Pulse Effects / Random Effects

ELECTRICAL	
Max Power Consumption	200 W
Standby Consumption	70 W
Voltage Range	100-240 V 50-60 Hz
Current (Max)	1.9 A
Inrush (Half Cycle)	30 A @ 230 V
Maximum Current available at the output	12 A
Connector	True1 In/Thru
Power Supply Unit	Active PFC
Contains Battery	N/A

TYPICAL POWER AND CURRENT	
120V , 60Hz	1.141A, 167W, 0.987
208V, 60Hz	0.815A, 166W, 0.911
230V, 50Hz	0.788A, 165W, 0.908
240V, 50Hz	0.775A, 164W, 0.906

Suitable disclaimer nominal, etc

OPTICAL PERFORMANCE	
Lens Size	126 mm (4.96 in)
Zoom Range	1°
Zoom Ratio	3-element
Gate Size	3 mm

MOVEMENT		
Pan Range	Infinite	
Pan Speed (End to End or range)	180°	1.13 s
	360°	1.21 s
	EtoE	1.33 s
Tilt Range	Infinite	
Tilt Speed (End to End or range)	180°	1.19 s
	360°	1.28 s
	EtoE	1.24 s
Resolution	8- or 16-bit	
Calibration Time	47 s	
Position Correction System	Yes / Automatic repositioning	
Follow Spot Modes	Manual & Tracking system	

COLOUR SYSTEM	
Colour System(s)	CMY, 22 colours & 1 Colour Wheel
Control	CMY 16-bit & 8-bit
CTO	N/A
Variable CTP	N/A
Colour Wheel	Fixed colour wheel with 5 color temperature correction and 17 complementary colours
Colour Wheel Effects	Continuous Rotation

GOBOS	
Indexing Wheel	N/A
Indexing Gobos	N/A
Gobo Diameter (Index)	N/A
Image Diameter (Index)	N/A
Static Wheel	1
Static Gobos	29
Gobo Diameter (Fix)	128 mm (5.03 in)
Image Diameter (Fix)	3 mm (0.12 in)
Gobo Thickness	N/A
Animation Wheel	N/A
Animation Details	N/A

TECHNICAL SPECIFICATIONS

PERFORMANCE		
LASER engine output (Sphere)		4,400 lm (Fan Mode Stage)
Fixture output (Sphere)		2,440 lm (Fan Mode Auto)
		2,440 lm (Fan Mode Stage)
		1,890 lm (Fan Mode Silence)
		1,310 lm (Fan Mode Super Silence)
Fixture Output (Goniometer)		2,440 lm (Fan Mode Auto)
Field Lumens (Goniometer)	Narrow	N/A
	Middle	N/A
	Wide	N/A
Lumen Per Watt (LPW) Max fixture output / 230 V Typical Power		14.8
CCT		9000 K
Ra @ open		70 (±2)
Δ uv		- 0.0047
CRI		> 70
Tm30		Rf: 68 Rg: 87
TLCI		45 (±2)
CQS		68.9

IMAGING	
Framing	N/A
Framing Rotation	N/A
Iris	Beam Reducer
Frost	2 Frost filters: Light 1° & Heavy 5°
Prism	2 combinable rotating and indexable prisms: one 32-facet circular, one 5-facet linear

CONNECTORS	
Power	In/Thru powerCON True 1
DMX	In/Thru 5 Pin XLR
Network	In/Thru RJ45
Wireless	DMX Only

CONTROL	
DMX Control	DMX (USITT DMX-512-A) RDM (ANSI/ESTA E1.20)
Transceiver/Receiver	RS-485 with Opto Isolation
DMX Modes	1 User Mode
Channel Count	Mode 1 Extended – 33
DMX Chart	Scan the QR code on page 5
Network Protocols	ArtNet & sACN
Local Control	Colour LCD Panel 5 Menu Buttons NFC
Stand Alone Mode	Main/Follow, presets 250
RDM Functions	Yes
Wireless DMX	CRMx TiMo RDM receiver
E-Sim Ready	Optional
USB Port	No

THERMAL	
Max Surface Temperature, steady state, at Ta 40°	45° C (113° F)
Max Ambient Temperature (Ta Max)	45° C (113° F)
Min Ambient Temperature (Ta Min)	-20° C (-4° F)
Total Heat Dissipation (Calculated +/- 10%)	560 BTU/H @ 240 V
Minimum to illuminated surface	15 m (49.21 ft)
Minimum to combustible surface	0.1 m (0.32 ft)
Thermal Protection system	Yes
Cooling modes	See Acoustics
Cooling System	Advanced Liquid Cooling

TECHNICAL SPECIFICATIONS

ACOUSTICS STATIC

Fan Mode	dB ^A ²	NC ³
Auto	38,2	25
Stage	41,1	33
Silence/Studio	33,4	20
Super Silence	33	19

DYNAMIC

Mode	dB ^A ²	NC ³
Auto	42,6	33
Stage	43,7	35
Silence/Studio	41	32
Super Silence	40,4	32

2. Measured @ 1m Static, 31dBA ambient

3. Noise Criterion

https://www.engineeringtoolbox.com/nc-noise-criterion-d_517.html

ENVIRONMENTAL

IP Rating	IP 65
Salt Spray Testing	Pending
Estimated embodied carbon including: - A1 - Raw materials of fixture and packaging - A3 - Product manufacturing	151.0 kg CO ₂ e
Recycling options	Packaging fully recycled and widely recyclable
SIP Optional	Yes
Our Environmental Commitment	

WARRANTY

Fixture	2 years
LASER Engine	2 years

From date of invoice

INSTALLATION

Orientation	Any
Mounting attachments	- Fastening bracket system: two Omega ¼ turn brackets designed for use with standard clamps - Mounting points: four ¼ turn locking fittings allowing installation of Omega brackets on luminaire - Safety cable attachment point
Installation version	TBC

CONSTRUCTION

Colour	Carbon Black Standard Custom colours on request
Materials	- Moving-head skeleton made of aluminium and steel metal plates - Head in die-cast aluminium - Base in die-cast aluminium - Heatsinks in aluminium and copper - Arms in self-extinguishing fire retardant ABS PC (VO class) - Two-side handles for transportation - Four heavy-duty feet for better stability



INCLUDED ITEMS

Manual	1
OMEGA brackets with quarter-turn locks	2
Cables	- IP65: 1 cable PowerCON True1 TOP to bare end, 1.5m - IP66: DMX IN / OUT tails to bare end for IP66 DMX connection - Ethernet IN / OUT tails to bare end for IP66 ArtNet™ connection - Power tail to bare end for IP66 power connection
Other accessories	N/A


TECHNICAL SPECIFICATIONS

PHYSICAL

Fixture / IP65 / IP66		
Length	265 mm (10.43 in)	
Height	430 mm (16.92 in)	
Depth	265 mm (10.43 in)	
Weight	14.5 kg (31,97 in)	
Shipping Dimensions		
Without foam	Length	540 mm (21.26 in)
	Height	390 mm (15.35 in)
	Depth	380 mm (14.96 in)
	Weight	18 kg (39.68 lb)
Single foam	Length	320 mm (12.6 in)
	Height	460 mm (18.11 in)
	Depth	320 mm (12.6 in)
	Weight	21 kg (46.3 lb)
Dual foam	Length	580mm (22.83 in)
	Height	410 mm (16.14 in)
	Depth	560 mm (22.04 in)
	Weight	68.5 kg (151,01 lb)
In SIP Dimensions		
Flightcase single foam	Length	320 mm (12.2 in)
	Height	460 mm (17.7 in)
	Depth	320 mm (12.2 in)
	Weight (excl fixture)	6 kg (13.2 lb)
Flightcase dual foam	Length	610 mm (24 in)
	Height	580 mm (22.83 in)
	Depth	550 mm (21.65 in)
	Weight (excl fixture)	7.8 kg (17.2 lb)



SUPPORTING DOCUMENTS

[Manual](#)
[GDTF Profile](#)
[GMA Profile](#)
[DMX Chart](#)
[Photometric Files](#)
[Software](#)
[Warranty](#)


COMPLIANCE

EU (EMC & LVD)

- EMC Directive 2014/30/EU
- LVD Directive 2014/35/EU

US (Safety & EMC)

- UL 1573
- FCC Part 15, 2020-f

Substance Regulations

- RoHS
- REACH
- CP65

Declarations

Scan the QR code above


ORDERING DETAILS

Kyalami
014042

ACCESORIES

IP Test Kit
048250
Lynx Control
045130

TECHNICAL SPECIFICATIONS

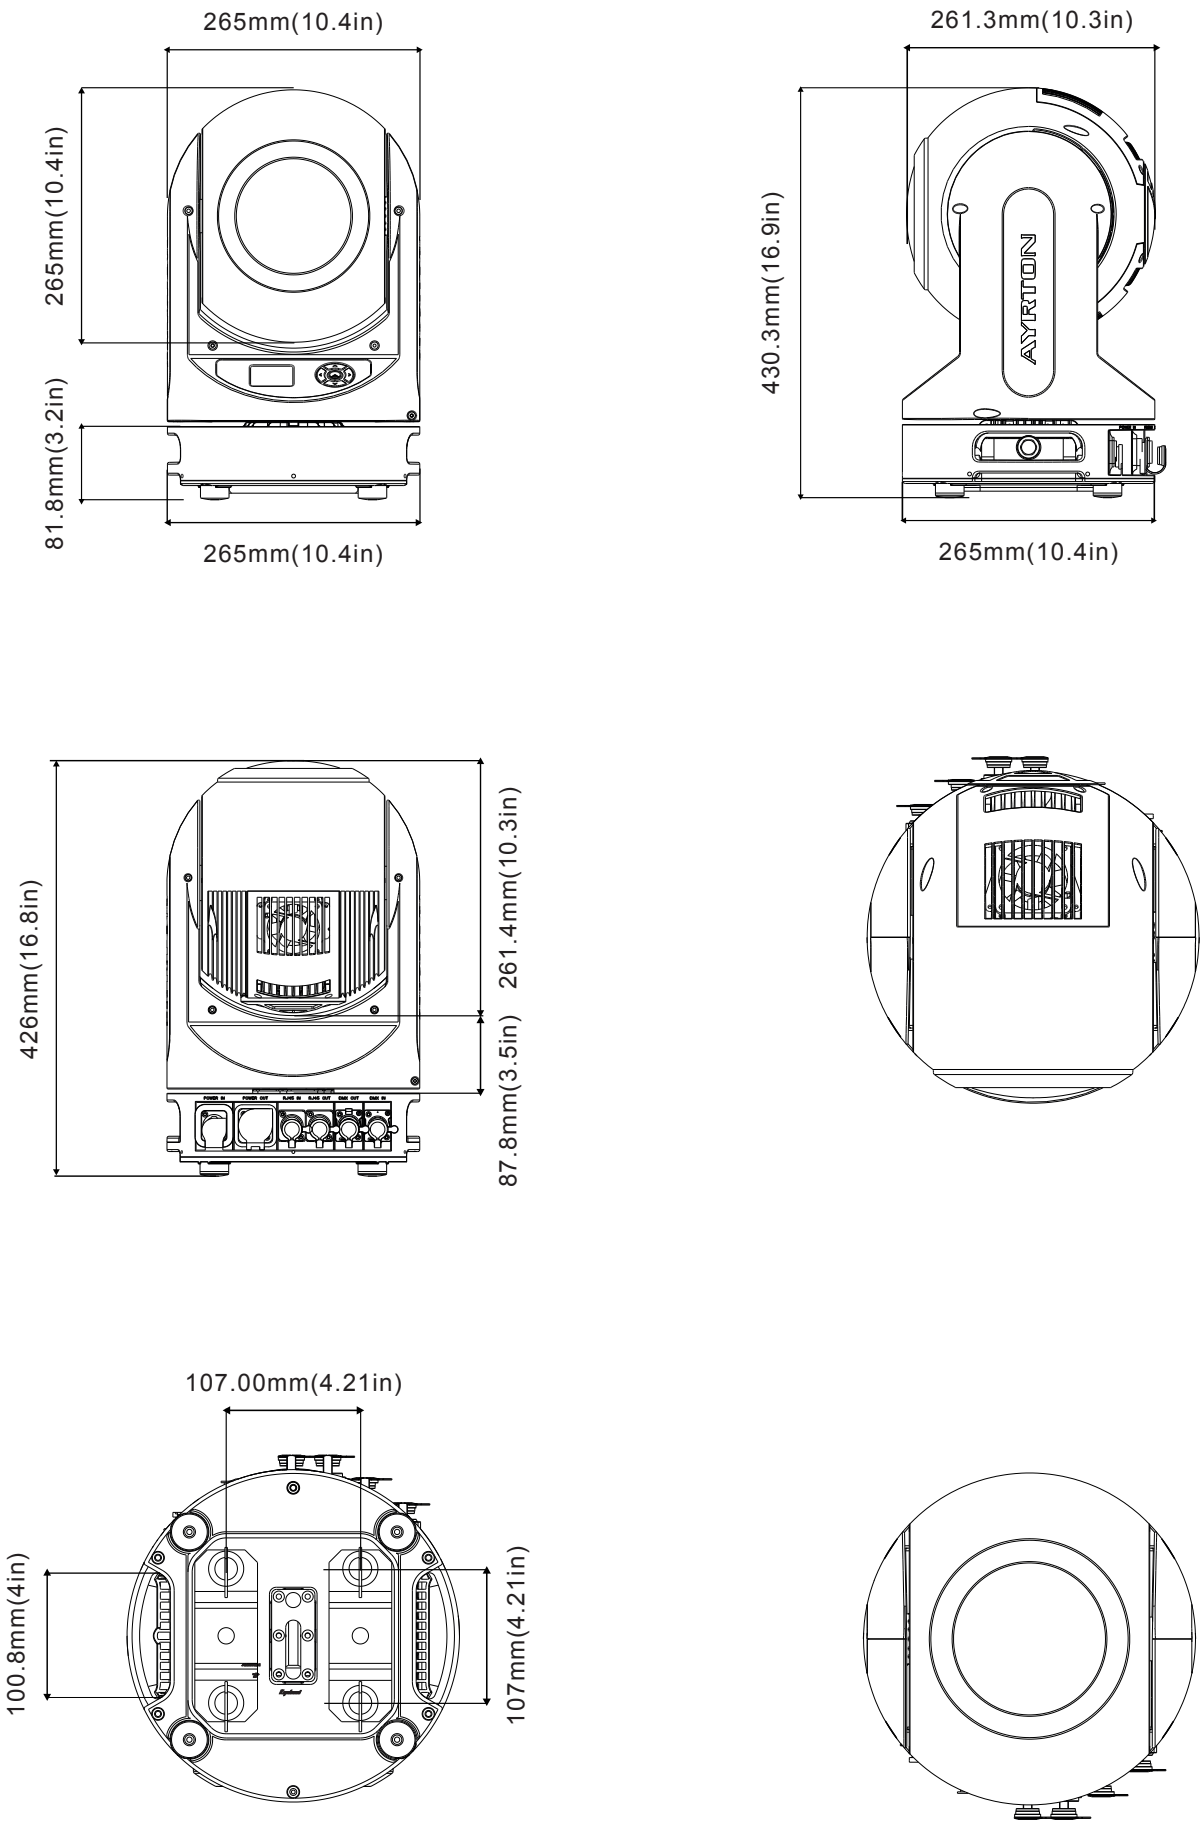

TECHNICAL SPECIFICATIONS




GOBO WHEEL

Static Gobo - GPD0100045

1	302	80% Iris Beam	16	411	Split Circle 2
2	304	60% Iris Beam	17	428	Split Triangle 3
3	306	40% Iris Beam	18	374	Compass 4
4	308	20% Iris Beam	19	345	Star Beam
5	312	Dot Line 2	20	342	Five Spokes
6	326	Dot Triangle 3	21	340	Triangle Beam
7	328	Dot Square 4	22	117	Helix 3
8	321	Dot Ring 7	23	430	Inverted Cross
9	324	Dot Mix	24	363	Rubik Cube
10	273	Prison Bars 3	25	332	Square Beam 4
11	099	Waves Light	26	330	Square Beam
12	298	Half Beam Left	27	348	Tilde
13	299	Half Beam Right	28	350	Bold Line
14	296	Half Beam Up	29	351	Vertical Line
15	295	Half Beam Down			

This side facing light source




COLOUR WHEEL

Static Wheel - GPP0098809

1	Red	12	Medium Yellow
2	Blue	13	Dark Green
3	Orange	14	Dark Amber
4	Green	15	Medium Blue
5	Pink	16	Oklahoma Yellow
6	Yellow	17	Light Amber
7	Velvet Green	18	CTO
8	Amber	19	CTO 1/2
9	Light Blue	20	CTB
10	Follies Pink	21	CTB 1/2
11	Slate Blue		

AUTO MODE: PHOTOMETRIC DETAIL

MIN ZOOM

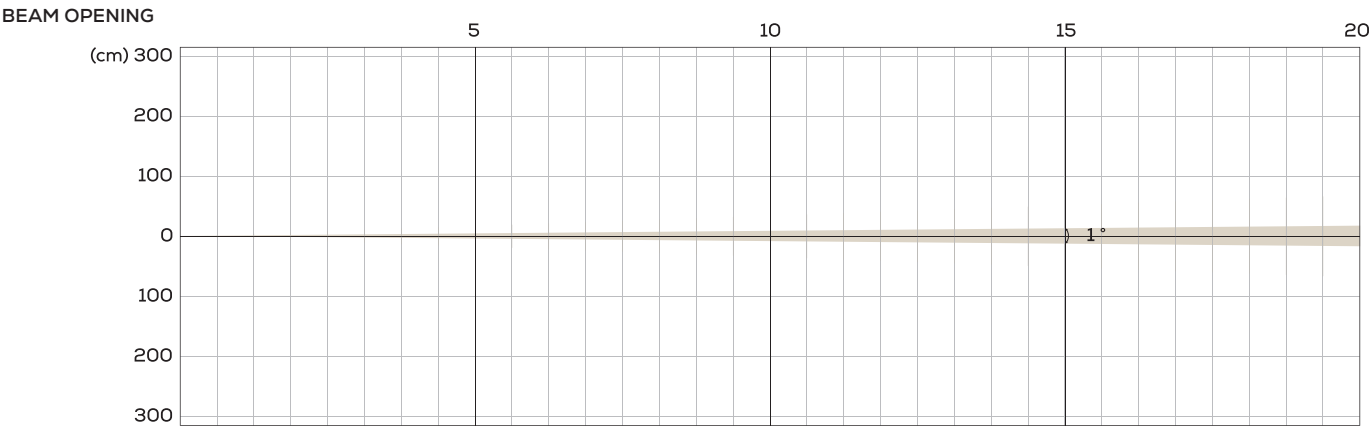

INTENSITY

Distance (m)	5		10		15		20		30		50		100	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	1,648,000	0.09	412,000	0.17	184,000	0.26	103,000	0.35	45,780	0.52	16,480	0.87	4,120	1.75

Distance (m)	100		250		500		750		1000		1500		2000	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	4,120	1.75	659	4.36	165	8.73	73	13.09	41	17.45	18	26.18	10	34.91

 DISCLAIMER

Errors and omissions for all information given in this specification sheet are possible. All information is subject to change without prior notice.

