

PASODOBLE

PAR 12

Light Source

12 x 8W RGBW LED

Total Lumen Output of Fixture

2,815 lumens

Beam Angle

16°

Acme

PASODOBLE



Main Features

Light Source: 12 x 8W RGBW LED

Beam Angle: 16°

Field Angle: 27°

Total Lumen Output of Fixture: 2,815 lumens

Combine powerful beam and wash in one fixture

Outstanding color mixing effect


Compact design, small size

Outstanding strobe effect with variable speed

Smooth dimming 0-100%

Flicker free management

Technical Specifications

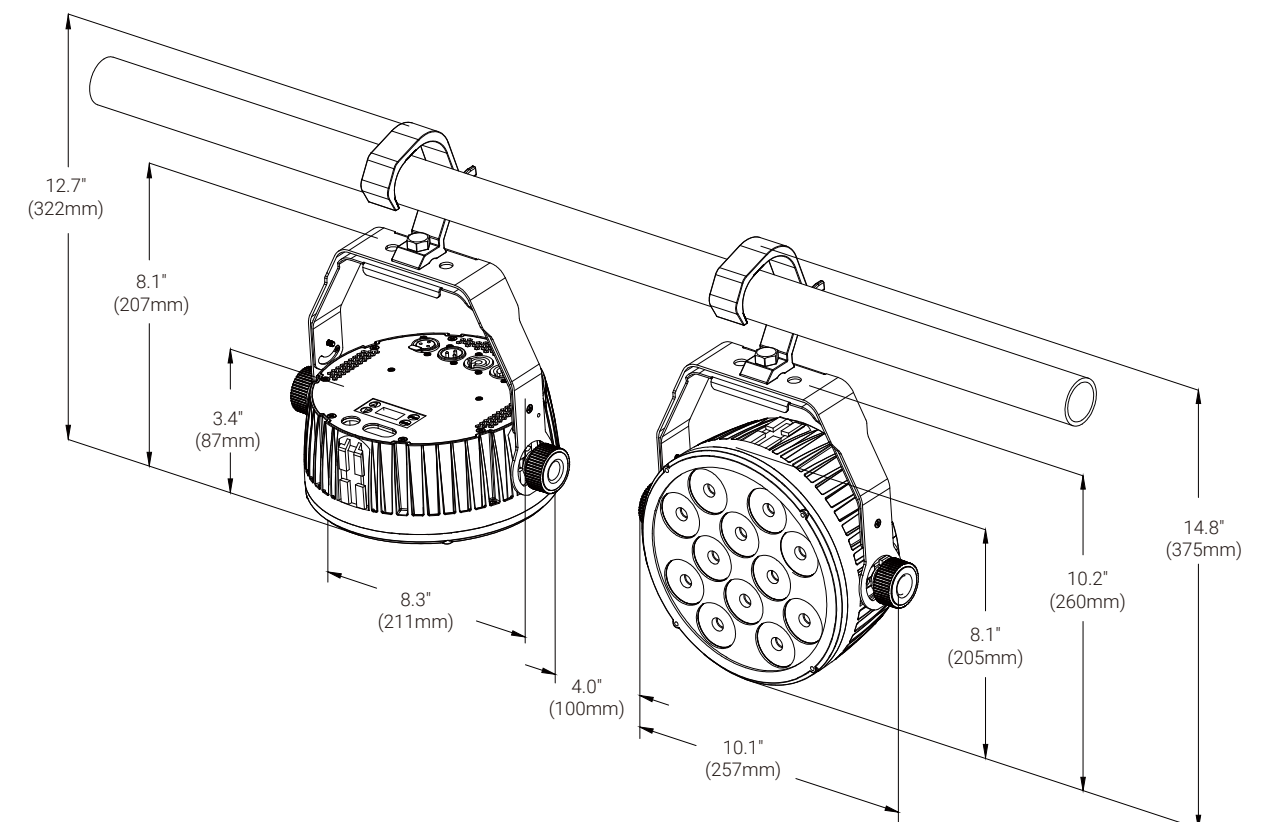

Light source

- Light Source: 12 x 8W RGBW LED
- Total Lumen Output of Fixture: 2,815 lumens
- Life Expectancy: 20,000 hours*

*Source manufacturer specification

Optical system

- Beam Angle: 16°
- Field Angle: 27°

Other Effects

- Outstanding color mixing effect
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%
- Flicker free management

Control

- 4 touch button control panel
- Display: OLED display
- Protocols: DMX512, RDM
- Firmware Upgrade: Upgrade via DMX link
- DMX Protocol Modes: 4
- Control Channels: 4/5/8/10

Electrical and Connectors

- Input Voltage Range: 180-240Vac; 50/60Hz
- Power Consumption: 85W
- Power In/Out: Power connector in/out (TRUE1 type)
- Data In/Out: 3-pin or 5-pin XLR

Physical Information

- Fixture Dimensions:
239 x 257 x 88 mm (9.4" x 10.1" x 3.5")
Weight: 3.0 kg (6.6 lbs)

Packing Information

- Carton Dimensions:
640 x 330 x 450 mm (25.2" x 13.0" x 17.7")
Weight: 23.5 kg (51.8 lbs) (one-pack loadr carton)


Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C

Installation

- Horizontally or vertically mounting
- Universal working position
- The feet support with locking points
- Safety cable attachment point

Photometric (Images)

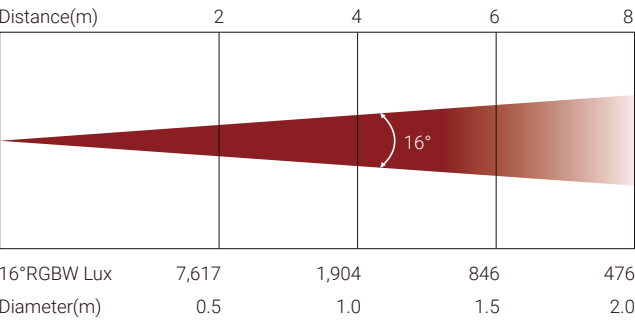

Specifications subject to change without notice.
11/28/2024