



FIXTURE OVERVIEW

- The ACME **SKYTRK** is a groundbreaking full-color laser searchlight, engineered to deliver intense output, exceptional precision, and chromatic finesse far beyond conventional beam fixtures.
- Powered by an 850W RGB full-color laser engine, the fixture produces 22,100 lumens of high-intensity light through an advanced optical system. At its heart is an ultra-large 300 mm frontal lens, projecting a razor-sharp 0.5° laser beam that cuts through the sky with unmatched clarity and saturated output. Its flexible moving-head design and precise positioning ensure wide coverage and dynamic transitions for any large-scale outdoor spectacle.
- Color performance is equally advanced. The **SKYTRK** features a virtual color wheel with 51 color presets, a virtual CMY color mixing system, and a virtual CTO ranging from 2,500K to 8,000K. Whether you need deep primaries, delicate pastels, or precise color-temperature control, the fixture ensures smooth, expressive chromatic performance across all applications. Four combinable rotating prisms add layered aerial effects that expand creative possibilities.
- Built into a rugged IP66-rated enclosure, the **SKYTRK** is perfect for large-scale shows, tours and live events, delivering laser-driven power, exceptional brightness, and limitless color creativity – even in the harshest outdoor conditions.



FEATURE HIGHLIGHTS

- Light Source: 850W RGB full-color laser engine
- 300 mm diameter frontal lens
- Beam Angle: 0.5°
- Fixture Luminous Output:
 - Auto Mode: 22,100 lumens
 - Quiet Mode: 9,160 lumens
 - Super Quiet Mode: 3,520 lumens
- Color Temperature Output of Fixture: 6,000K
- Virtual CMY color mixing
- Virtual CTO Color Correction: 2,500K-8,000K
- Virtual Color Wheel: 51 color presets
- 4 Combinable Rotating and Indexable Prisms:
 - 1 x 8-facet circular prism, 1 x 16-facet circular prism, 1 x 6-facet linear prism, 1 x multi-facet circular prism, rotatable and overlayable in both directions
- Outstanding strobe effect with variable speed
- Flicker-free management
- IP66 rated

TECHNICAL SPECIFICATIONS

Model

- Model Name: SKYTRK
- Model Code: XL 850 BEAM IP

Light Source

- Light Source: 850W RGB full-color laser engine
- Life Expectancy: 12,000 hours*
- *Source manufacturer specification

Photometric Data

- Fixture Luminous Output:
 - Auto Mode: 22,100 lumens
 - Quiet Mode: 9,160 lumens
 - Super Quiet Mode: 3,520 lumens
- CCT: 6,000K (+/- 200K)
- Peak Luminous Intensity: 1,801,000 cd

Optical System

- Diameter of Frontal Lens: 300 mm
- Beam Angle: 0.5°

Control & Program

- 4 touch button control panel
- Display: LCD display
- Protocols: DMX, RDM, Art-Net, sACN, NFC
- Setting and Addressing: Display menu, RDM
- DMX Modes: 2
- DMX Channels: 23(CMY)/23(RGB)
- Firmware Upgrade: Upgrade via DMX link or USB stick

Pan & Tilt

- Pan: 540°
- Tilt: 270°
- Automatic Pan/Tilt position correction
- Resolution: 16 bit
- Pan/Tilt lock

Color Mixing

- Virtual CMY color mixing

Color Correction

- Virtual CTO Color Correction: 2,500K-8,000K

Color Wheel

- Virtual Color Wheel: 51 color presets

Focus

- Motorized focus system

Zoom

- Motorized zoom system

Prism

- 4 Combinable Rotating and Indexable Prisms:
 - 1 x 8-facet circular prism, 1 x 16-facet circular prism,
 - 1 x 6-facet linear prism, 1 x multi-facet circular prism,
- rotatable and overlayable in both directions

Electrical

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 1,525W
- Power In/Out: Waterproof power connector in/out
- Data In/Out: 3-pin or 5-pin waterproof XLR, waterproof RJ45 connector

Physical

- Weight: 59.5 kg (132.2 lbs)
- Length (Head): 662 mm (26")
- Length (Base): 464 mm (18.2")
- Width (Across Yoke): 464 mm (18.3")
- Height (Head Up): 854 mm (33.6")

Construction

- Housing: Aluminum-magnesium alloy
- Color: Black
- Protection Rating: IP66

Work Environment

- Maximum Ambient Temperature: 45°C
- Minimum Operating Temperature: -20°C
- Maximum Surface Temperature: 75°C

TECHNICAL SPECIFICATIONS

Acoustic Data

- Noise Level:
 - Auto Mode: 47 dB(A) @ 1 m
 - Quiet Mode: 46 dB(A) @ 1 m
 - Super Quiet Mode: 45 dB(A) @ 1 m

Installation

- Vertical mounting
- 2 omega brackets
- Safety cable attachment point

Approvals

- CE compliant
 - EMC directive 2014/30/EU
 - LVD directive 2014/35/EU
- UKCA compliant
 - Electromagnetic Compatibility Regulations 2016
 - Electrical Equipment (Safety) Regulations 2016



INCLUDED ITEMS

Included Items

- QR code on fixture to receive digital user manual
- Power cable
- 2 omega brackets(3002003003)

ORDERING INFORMATION

Optional Accessories (With Order Code)

- Flight Case
- Standard: One-pack loader case (63584348)
- Clamp: C-250B (2060001632-B)
- Safety Cable: SW-05 (2060001603-E)
- Signal Cable: 3-pin waterproof signal cable (3017013468) or 5-pin waterproof signal cable (3017013473)

Carton Dimensions

- Carton Dimensions:
- Width: 830 mm (32.7")
- Depth: 570 mm (22.4")
- Height: 855 mm (33.7")
- Weight:
- G.W.: 73 kg (160.9 lbs) (one-pack loader carton)



3-pin/5-pin waterproof
signal cable: 3017013468/3017013473



SW-05: 2060001603-E



C-250B: 2060001632-B



Standard(One-pack loader case): 63584348

(STANDARD) FLIGHT CASE

APPLICABLE MODELS

- SKYTRK (XL 850 BEAM IP)

ORDER CODE

- 63584348 SKYTRK (XL 850 BEAM IP)

CASE WEIGHT

- 52.5 kg (115.7 lbs)

MEAS





- 810 x 610 x 910 mm (32.1" x 24.0" x 35.8")

LOADING Q'TY

- One-pack loader case


MAXIMUM STACKING

- Two stacks

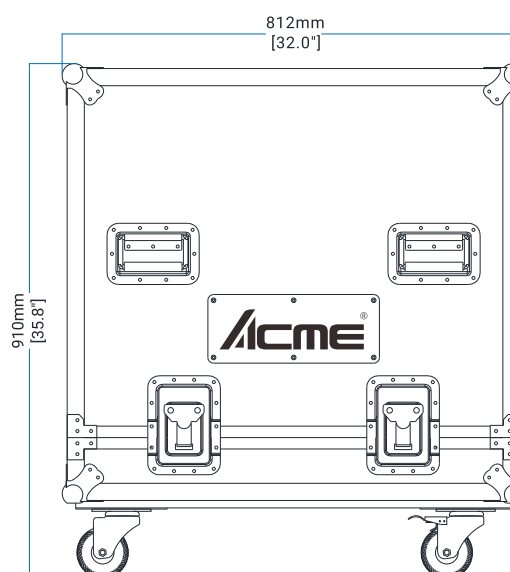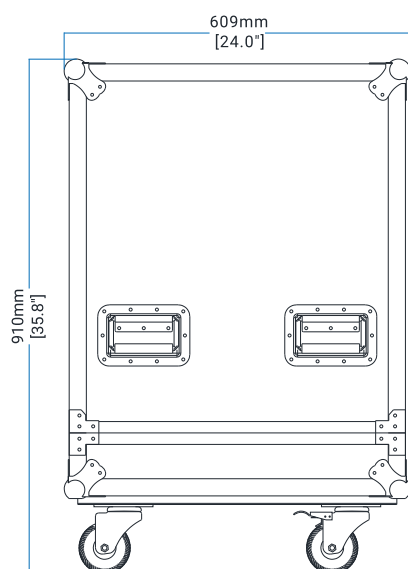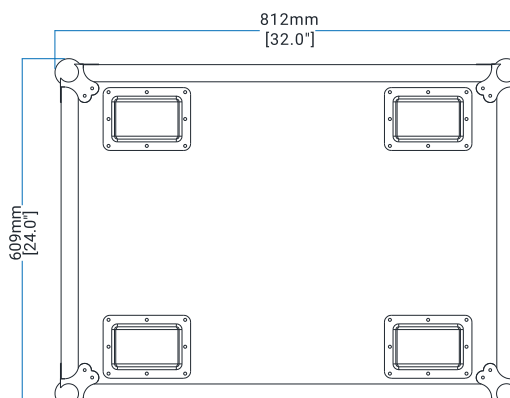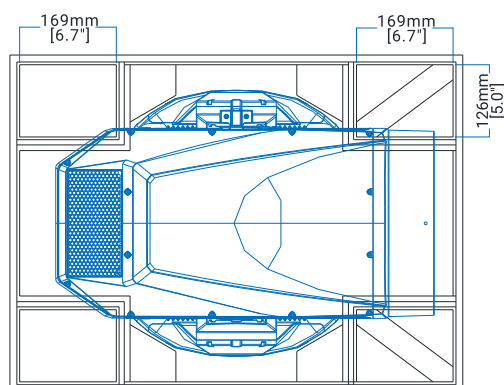


ACASE by ACME Version: 20260126-A

DIMENSIONS

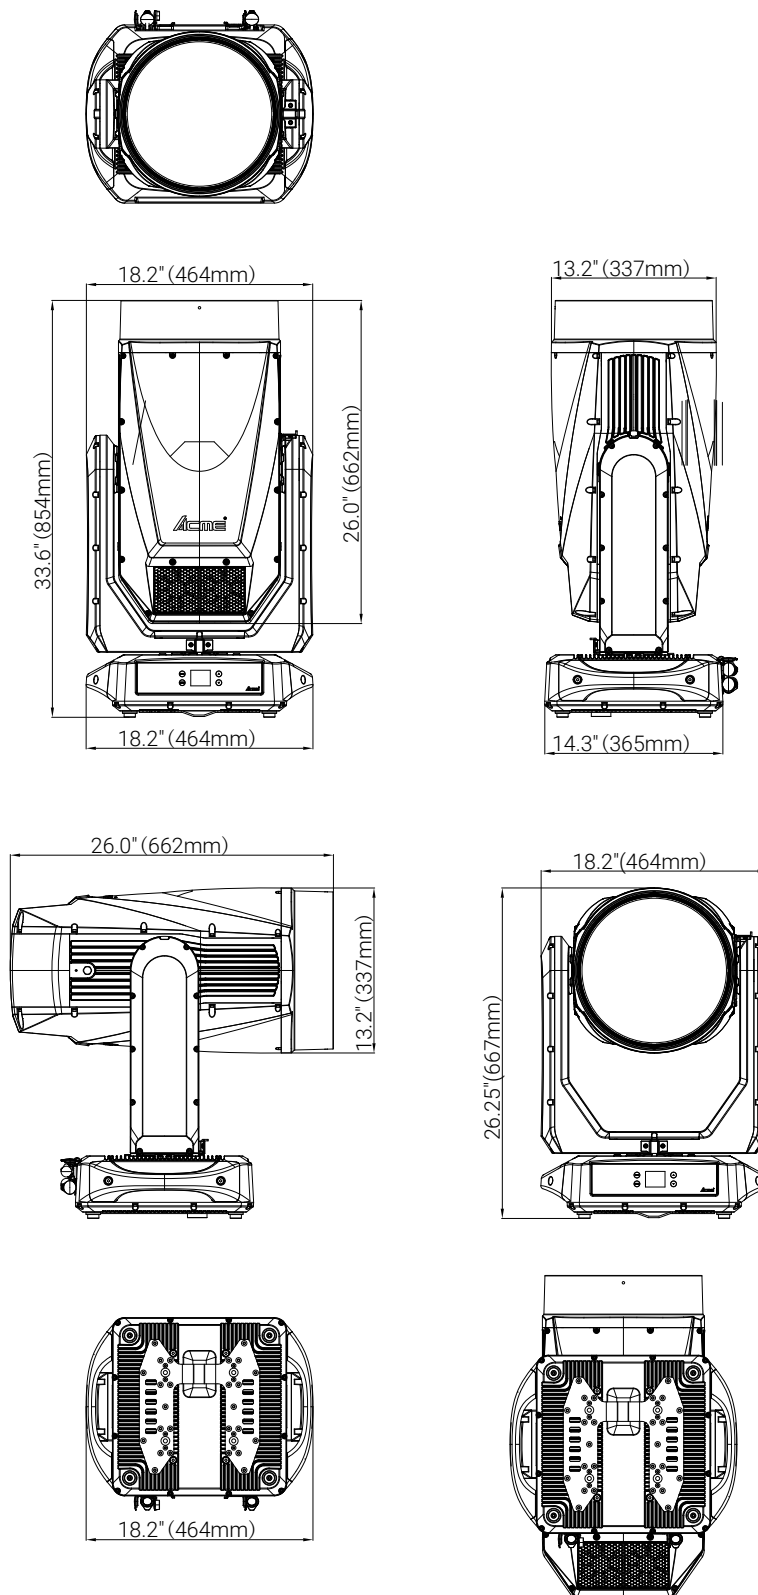


HANGING DIMENSIONS

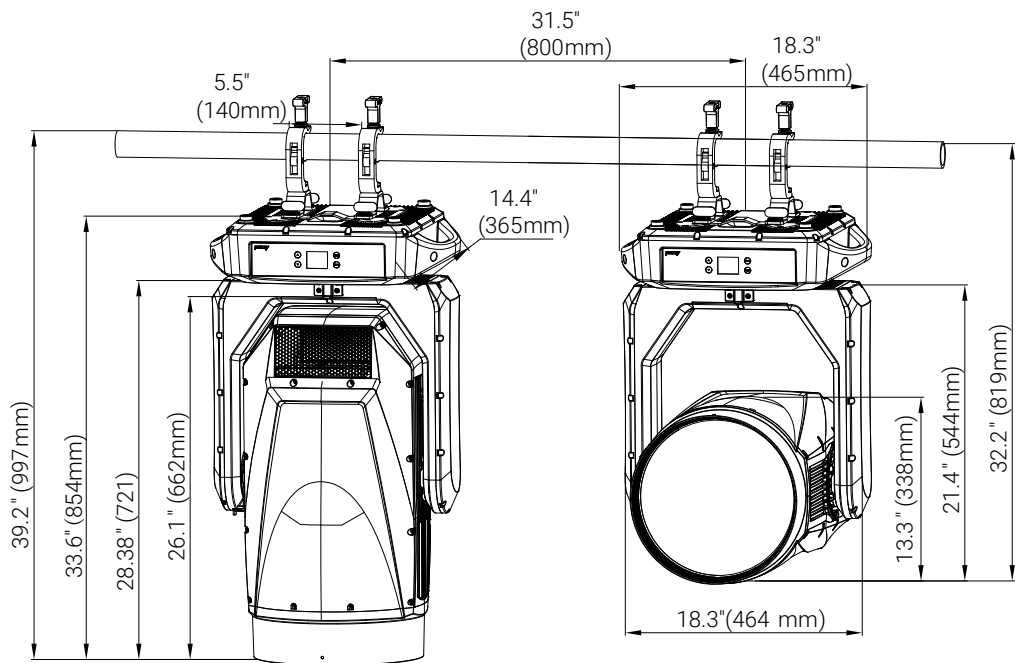


PHOTOMETRIC

Auto Mode

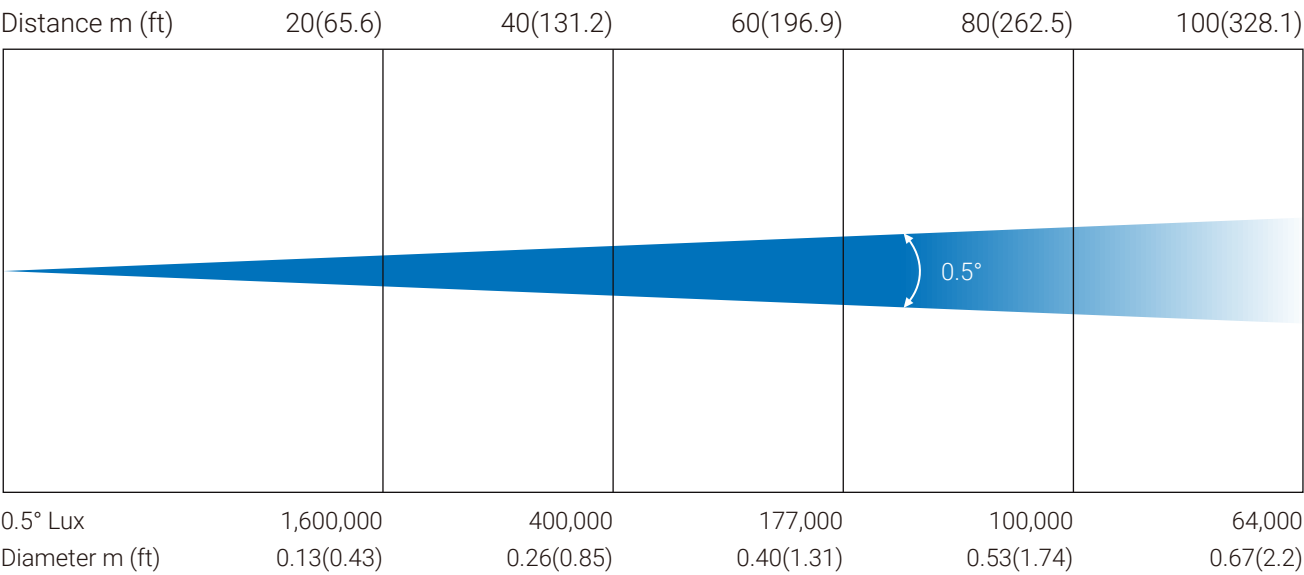


PHOTOMETRIC

Quiet Mode

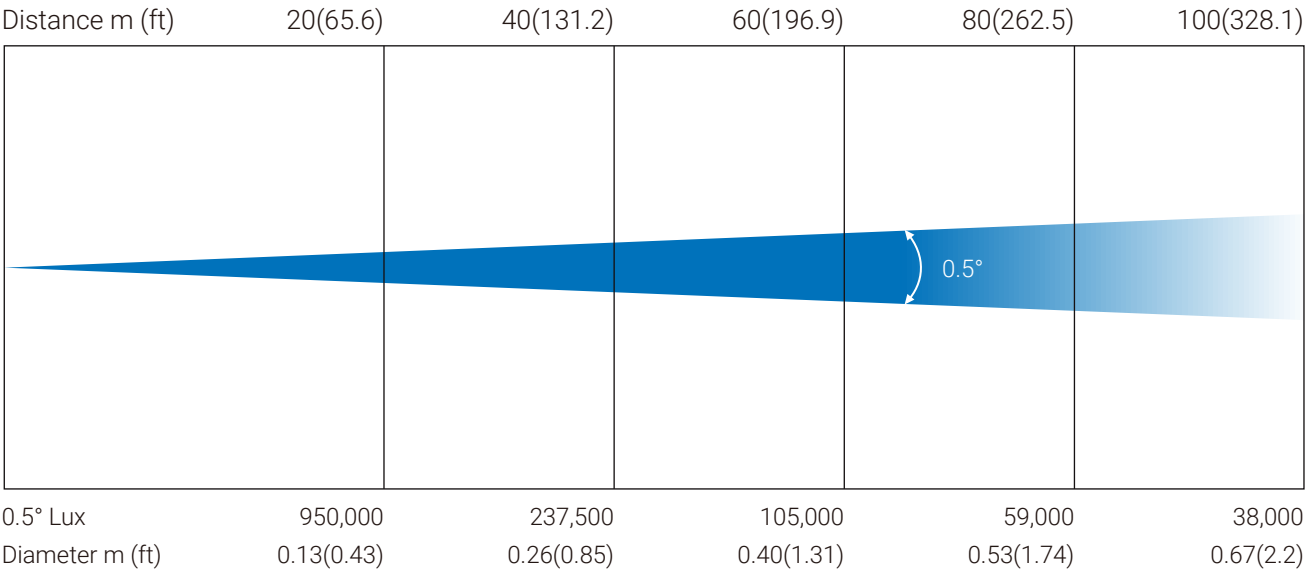

Super Quiet Mode

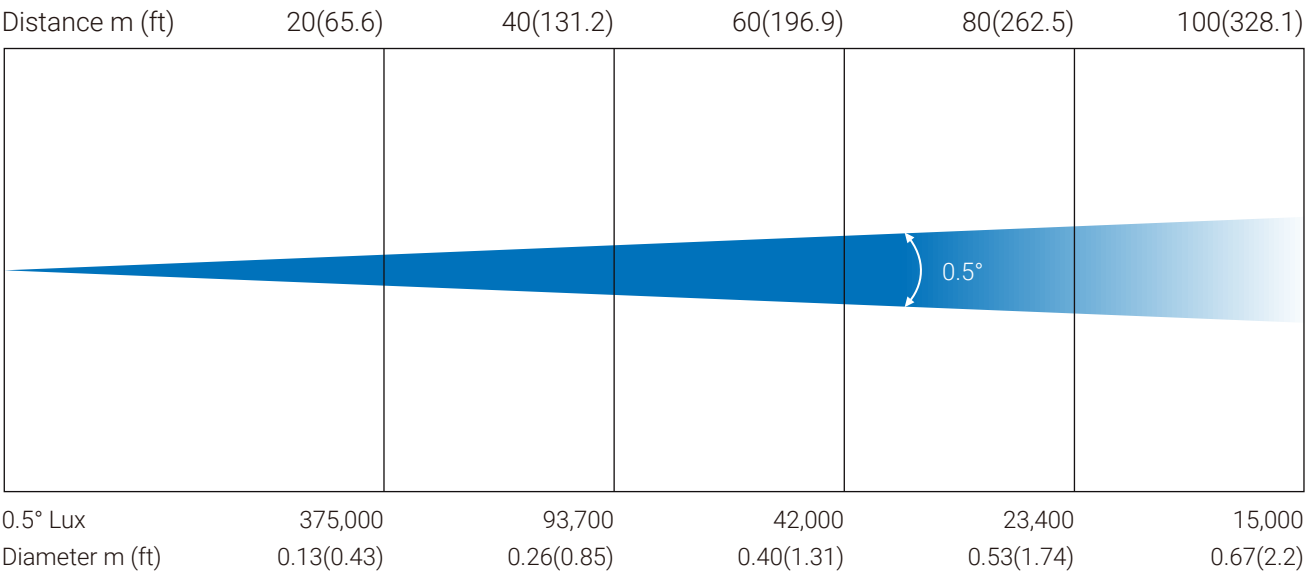

DYNAMIC EFFECTS

Virtual Color Wheel



DYNAMIC EFFECTS

Virtual CMY Color Mixing



Virtual CTO Color



2,500K-8,000K


Prisms/Frost Filter




1 x 8-Facet Circular Prism



1 x 16-Facet Circular Prism




1 x Multi-Facet Circular Prism




1 x 6-Facet Linear Prism

PHOTOMETRIC REPORT – CHROMATICITY


Spectral Distribution

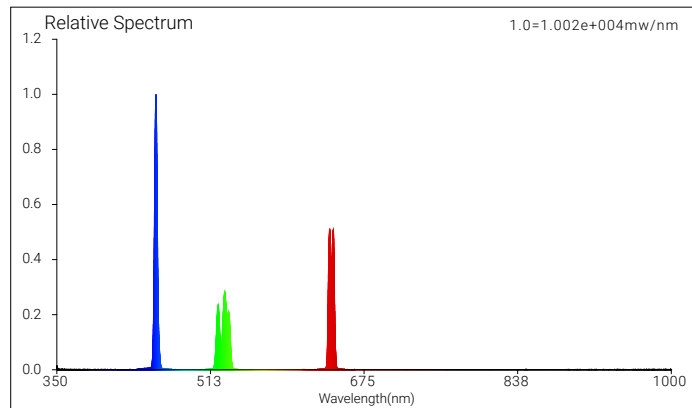


CRI: 44.2 (R1-R8)

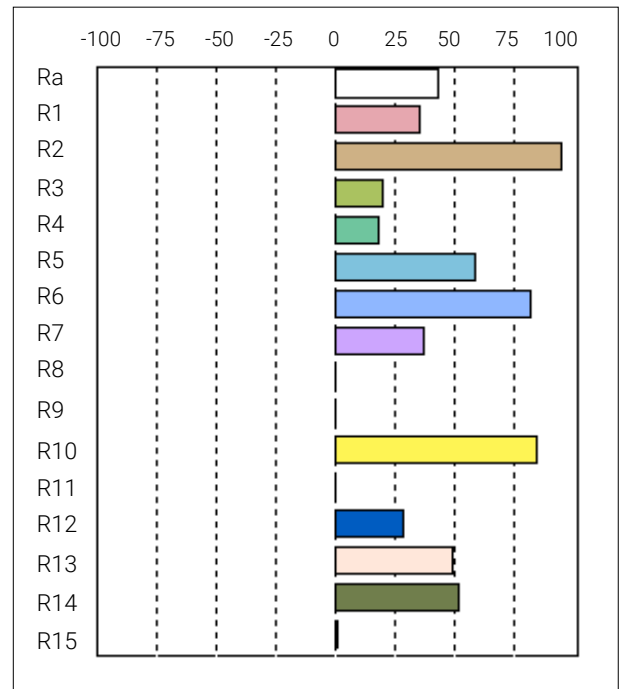

CIE 1931 EVERFINE

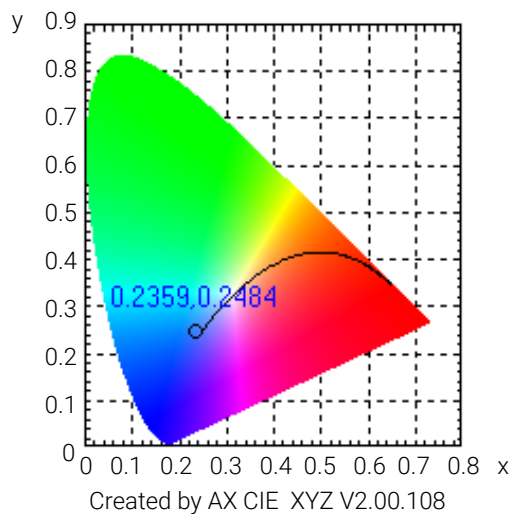

CQS: 28.6 (Q1-Q8)

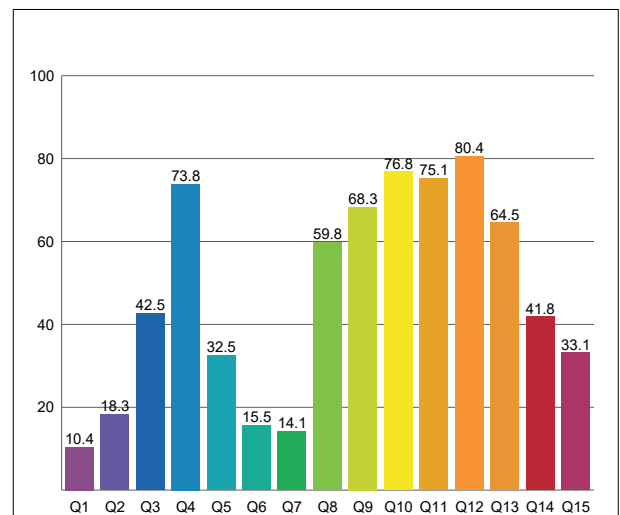

CRI C Values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
36.8	95.7	20.8	19.2	59.9	83.2	38.3	0.0	0.0	85.6	0.0	30.1	50.7	53.1	1.8	44.2

TM30 R Values

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
36.8	95.7	20.8	19.2	59.9	83.2	38.3	0.0	0.0	85.6	0.0	30.1	50.7	53.1	1.8

CQS Q Values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
10.4	18.3	42.5	73.8	32.5	15.5	14.1	59.8	68.3	76.8	75.1	80.4	64.5	41.8	33.1

Colour Parameters







Color temperature	Color rendering index	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5,6620K	44.2	41	127	28.6	0.2359	0.2484	0.1713	0.4058	0.0102

PHOTOMETRIC REPORT – TM-30

TM-30 Rf (IES TM-30-15 Fidelity Index): 41


TM-30 Rg (IES TM-30-15 Fidelity Index): 127

Hue Bin	Hue Angle	Graphic shift(%)		
		Rf	Chroma	Hue
1	0.0° – 22.5°	3	60	-3
2	22.5° – 45.0°	1	34	-39
3	45.0° – 67.5°	25	23	-49
4	67.5° – 90.0°	40	2	-32
5	90.0° – 112.5°	69	-4	3
6	112.5° – 135.0°	60	8	9
7	135.0° – 157.5°	45	23	5
8	157.5° – 180.0°	55	22	-5
9	180.0° – 202.5°	70	15	-7
10	202.5° – 225.0°	62	-7	-16
11	225.0° – 247.5°	74	1	8
12	247.5° – 270.0°	46	-6	31
13	270.0° – 292.5°	48	-4	43
14	292.5° – 315.0°	8	6	53
15	315.0° – 337.5°	9	41	52
16	337.5° – 360.0°	21	36	11

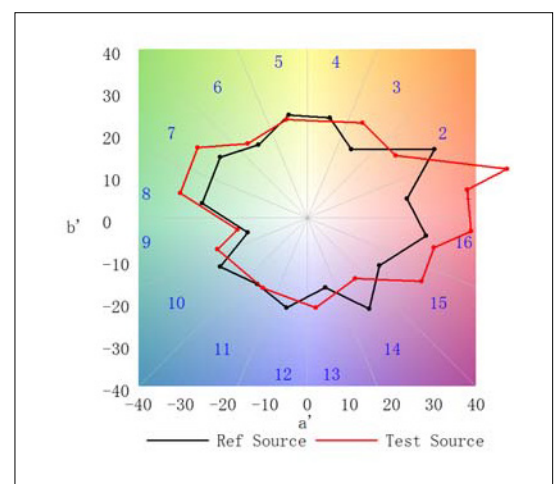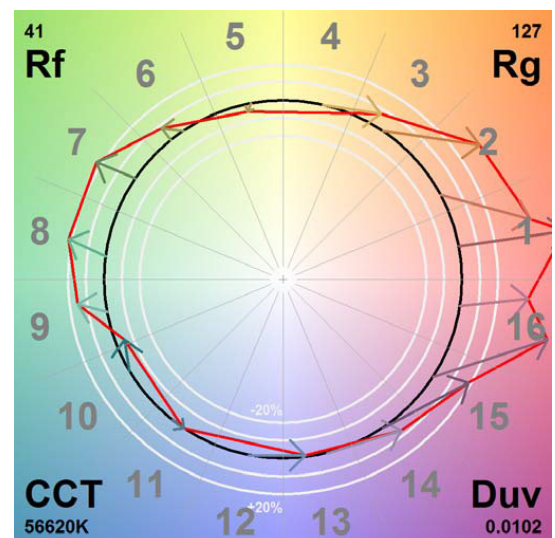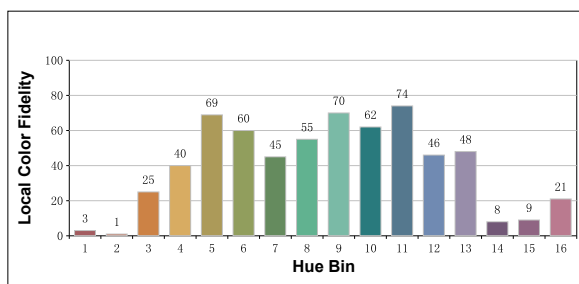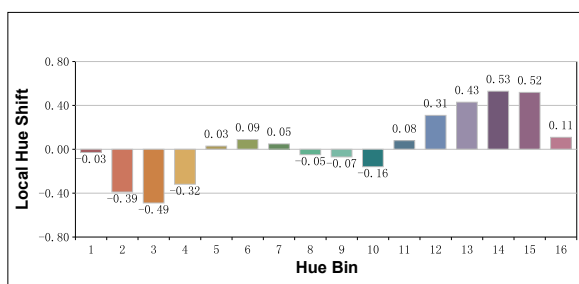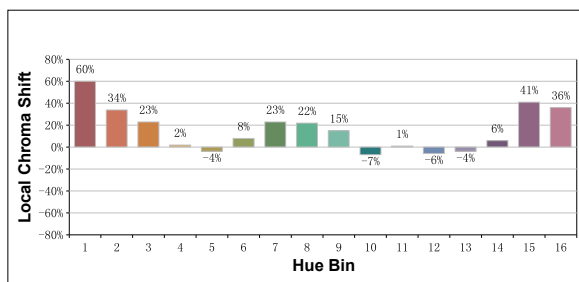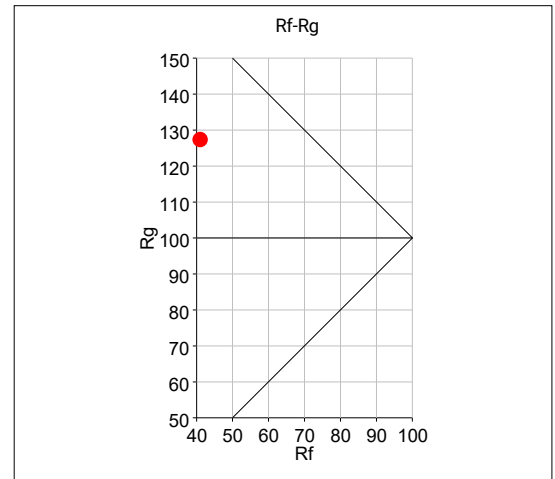

PHOTOMETRIC REPORT – TM-30

Color Evaluation Sample

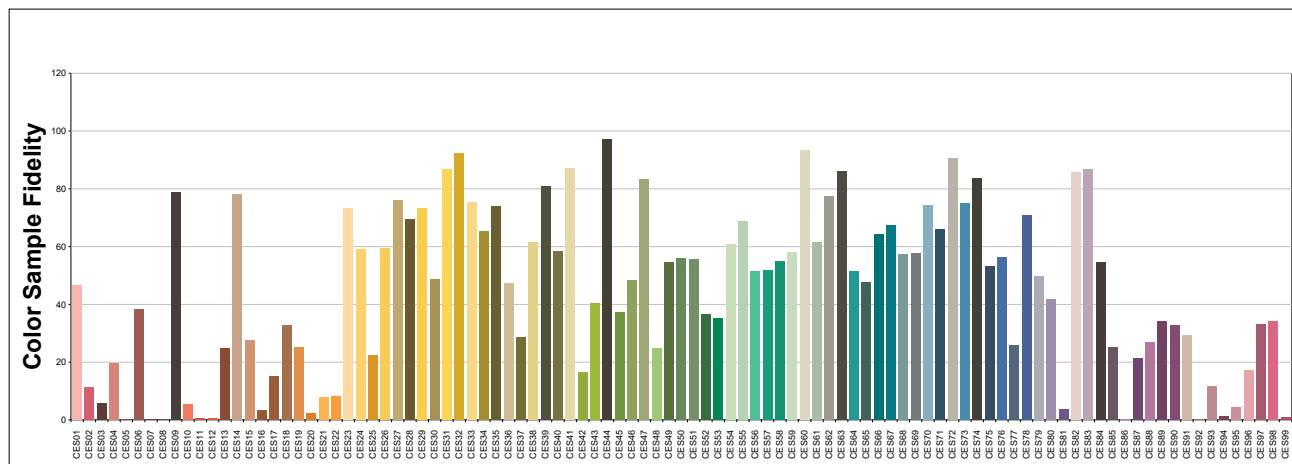

PHOTOMETRIC REPORT – TLCI-11



Sector	Lightness	Chroma	Hue
R	-16	-9	-1
R/Y	1	-3	8
Y	1	-1	1
Y/G	-1	-5	-6
G	-4	-8	-4
G/C	-1	-8	4
C	-4	-1	8
C/B	1	-2	3
B	-2	-5	-4
B/M	-1	-2	-3
M	-7	-3	-13
M/R	-15	-7	-12