

ZEUS

XP 500 BSW IP



Light Source
PHILIPS MSD Silver 420W/2 LL

Total Lumen Output of Fixture
13,800 lumens

Zoom Range
Beam Mode: **1.6°-27°**
Spot Mode: **2.3°-44°**
Wash Mode: **8°-60°**

Diameter of Frontal Lens
170 mm

ACME

ZEUS



Main Features

Light Source: PHILIPS MSD Silver 420W/2 LL

Total Lumen Output of Fixture: 13,800 lumens

170 mm diameter frontal lens

Zoom Range:

Beam Mode: 1.6°-27°

Spot Mode: 2.3°-44°

Wash Mode: 8°-60°

Color Temperature Output of Fixture: 7,800K

Variable CTO ranging from 3,200K-6,700K

Linear CMY color mixing

Outstanding strobe effect with variable speed

2 Color Wheels:

Color Wheel 1: 6 colors + Cyan, plus open

Color Wheel 2: 6 colors + Magenta, plus open

1 Static Gobo Wheel: 16 gobos, plus open

1 Rotating Gobo Wheel: 9 gobos, plus open

2 Combinable Rotating and Indexable Prisms:

1 x 8-facet circular prism, 1 x 6-facet linear prism,
rotatable in both directions


1 frost filter

IP66 rated

Smooth dimming 0-100%

Flicker-free management

Technical Specifications

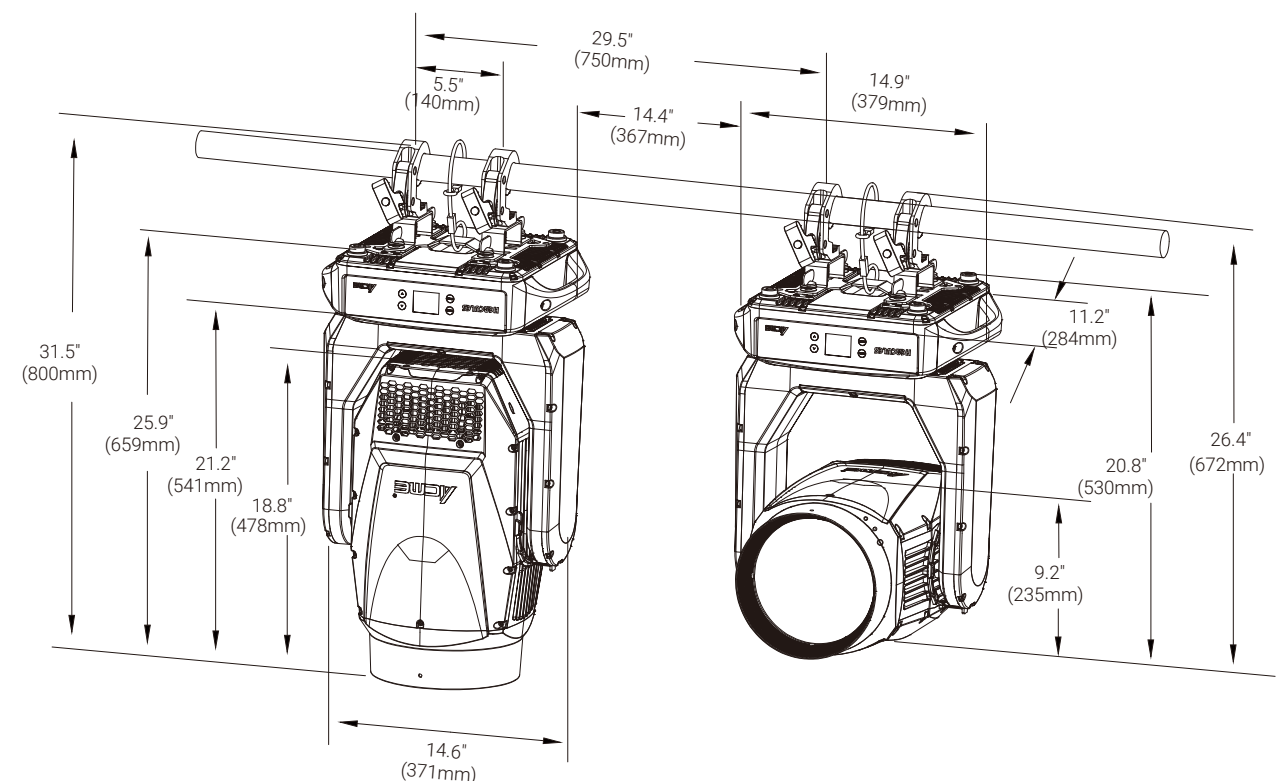


Light Source

- Light Source: PHILIPS MSD Silver 420W/2 LL
 - Color Temperature Output of Fixture: 7,800K
 - Total Lumen Output of Fixture: 13,800 lumens
 - Life Expectancy: 3,500 hours*
- *Source manufacturer specification

Optical System


- Zoom Range:
Beam Mode: 1.6°-27°
Spot Mode: 2.3°-44°
Wash Mode: 8°-60°
- Diameter of Frontal Lens: 170 mm

Prism / Frost Filter

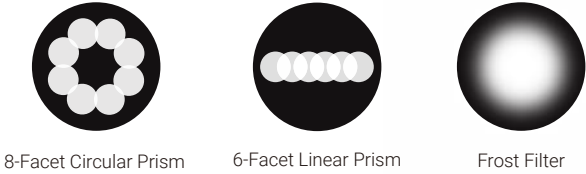


Colors


- Linear CMY color mixing
- 
- Linear CTO Color Correction: 3,200K-6,700K
- 
- 2 Color Wheels:
Color Wheel 1: 6 colors + Cyan, plus open
Color Wheel 2: 6 colors + Magenta, plus open

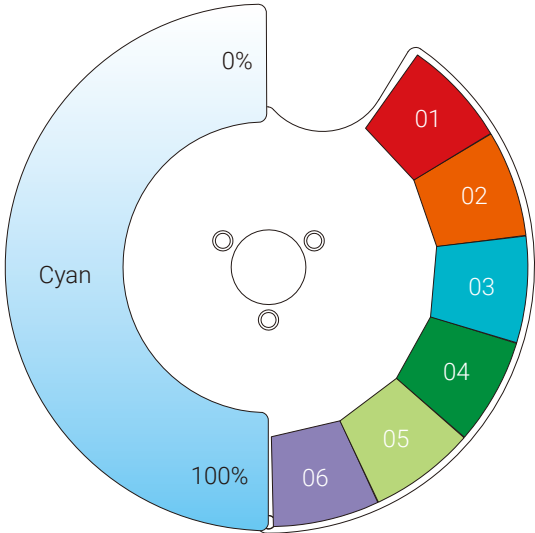

Color Wheel-1

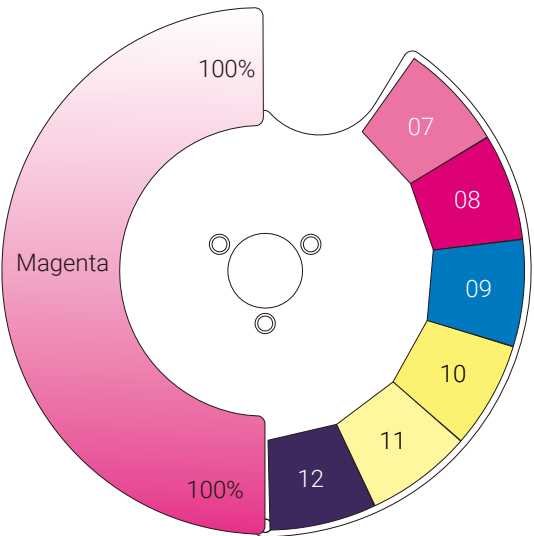


Color Wheel-2

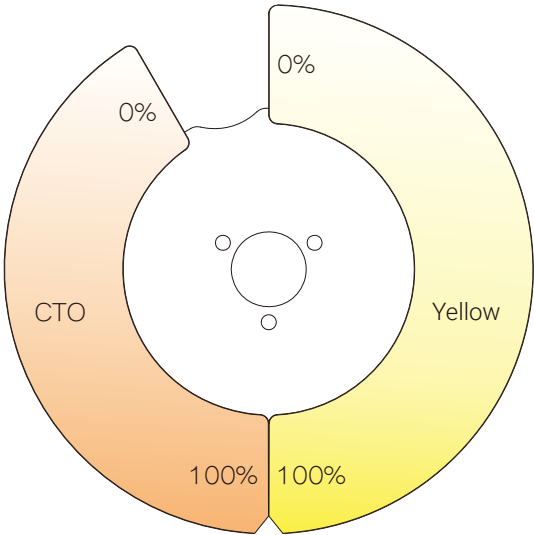

Static Gobos


- 1 Static Gobo Wheel: 16 gobos, plus open

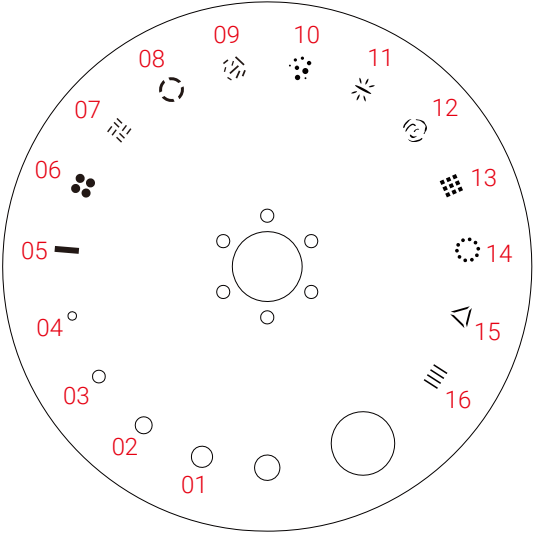

Static Gobo Wheel

Rotating Gobos

- 1 Rotating Gobo Wheel: 9 gobos, plus open
- Gobo Diameter: 18 mm
- Image Diameter: 11 mm

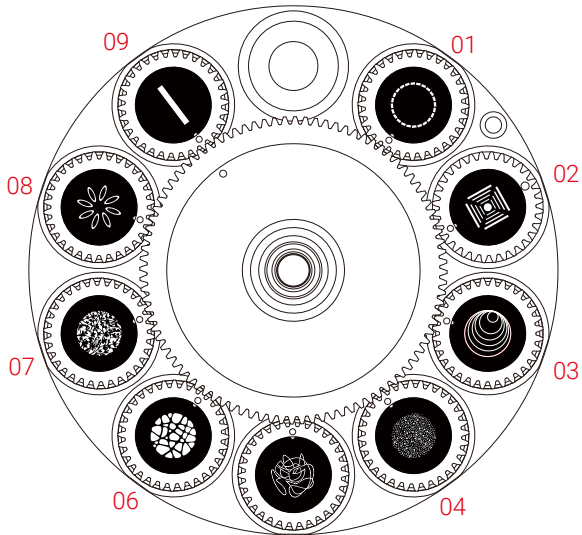

Rotating Gobo Wheel

Other Effects

- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%
- Motorized zoom
- Motorized focus system
- Flicker free management

Pan & Tilt

- Pan Movement: 540°
- Tilt Movement: 265°
- Automatic Pan/Tilt position correction
- Resolution: 16 bit
- Fixation: Pan/Tilt lock

Control

- 4 touch button control panel
- Display: LCD display
- Protocols: DMX512, RDM, Art-Net, sACN
- DMX Protocol Modes: 2
- Control Channels: 20/28
- Firmware Upgrade: Upgrade via DMX link or USB disk

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 615W
- Power In/Out: Waterproof power connector in/out
- Data In/Out: 3-pin or 5-pin waterproof XLR, RJ45 connector

Physical Information

- Fixture Dimensions:
379 x 284 x 659 mm (14.9" x 11.2" x 25.9")
- Weight: 30 kg (66.1 lbs)

Packing Information

- Flight Case Dimensions:
1,170 x 610 x 795 mm (46.1" x 24.0" x 31.3")
- Carton Dimensions:
610 x 490 x 715 mm (24.0" x 19.3" x 28.2")
- Weight :
G.W.: 38 kg (83.8 lbs) (one-pack loader carton)

Work Environment

- Maximum Ambient Temperature: 40°C
- Maximum Surface Temperature: -10°C
- Minimum Operating Temperature: 75°C
- Protection Rating: IP66

Installation

- Horizontal or vertical mounting
- Universal working position
- 2 omega brackets
- Safety cable attachment point


Included Items

- Digital user manual
- Power cable
- 2 omega brackets (3002003002)

Optional Accessories (With Order Code)

- Flight Case:
Standard : Two-pack loader case (63584148)
- Clamp : C-250B (2060001632-B)
- Safety Cable: SW-05 (2060001603-E)
- Signal Cable: 3-pin waterproof signal cable (3017013468) or 5-pin waterproof signal cable (3017013473)

Photometric (Images)

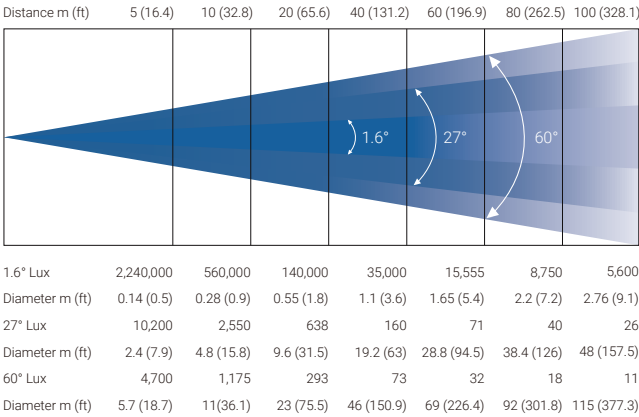

Specifications subject to change without notice.
08/01/2025