

WILLOW 500

BSW 500

Light Source

1 x 400W LED

Angle

1°/3°/6.5°/10° (Beam)

Static Gobo: 9°/18° (with zoom lens)

Rotating Gobo: 10°/20° (with zoom lens)

12°-23° (Wash)

Diameter of Frontal Lens

136 mm

Acme

WILLOW 500



Main Features

Combine Beam, Spot, and Wash in one

Beam Angle: 1°/3°/6.5°/10°

Spot Angle:

Static Gobo Wheel: 9°/18° (with zoom lens)

Rotating Gobo Wheel: 10°/20° (with zoom lens)

Wash Angle: 12°-23°

1 Rotating gobo wheel

1 static gobo wheel

1 color wheel

1 Color Wheel: 7 colors, plus open

1 Static Gobo Wheel: 9 gobos, plus open

1 Rotating Gobo Wheel: 7 gobos, plus open

Outstanding strobe effect with variable speed

Flicker free management

Dust-proof and oil-proof design


1 Prism: 1 x 6-facet circular prism, rotatable in both direction

Smooth dimming 0-100%

Independent frost effect

Outstanding strobe effect with variable speed

Technical Specifications

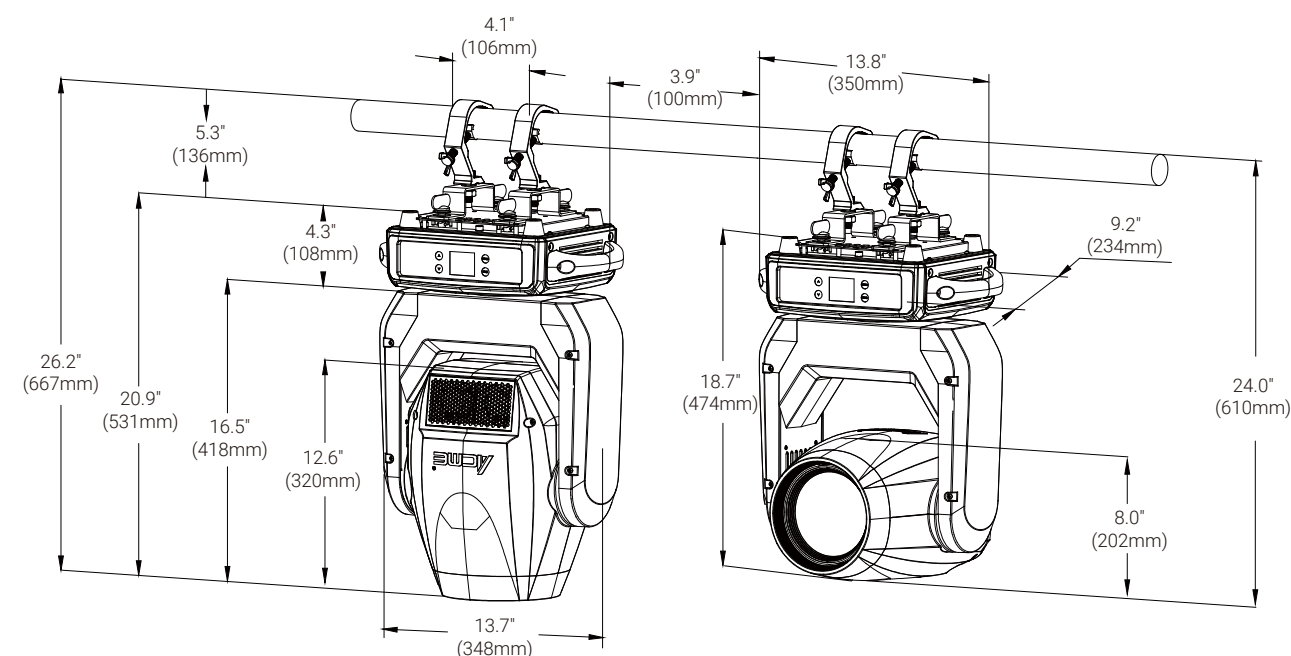

Light Source


- Light Source: 1 x 400W LED
- Total Lumen Output of Fixture: 10,100 lumens
- Life Expectancy: 2,0000 hours*

*Source manufacturer specification

Optical System


- Advanced optical system to ensure image quality, clear and sharp
- Beam Angle: 1°/3 °/6.5°/10°
- Spot Angle:
- Static Gobo Wheel: 9°/18° (with zoom lens)
- Rotating Gobo Wheel: 10°/20° (with zoom lens)
- Wash Angle: 12°-23°
- Diameter of Frontal Lens: 136 mm

Prism / Frost Filter

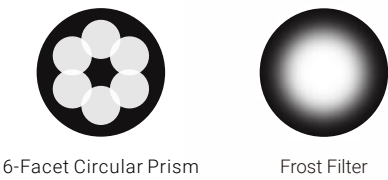


Colors

- 1 Color Wheel: 7 colors, plus open

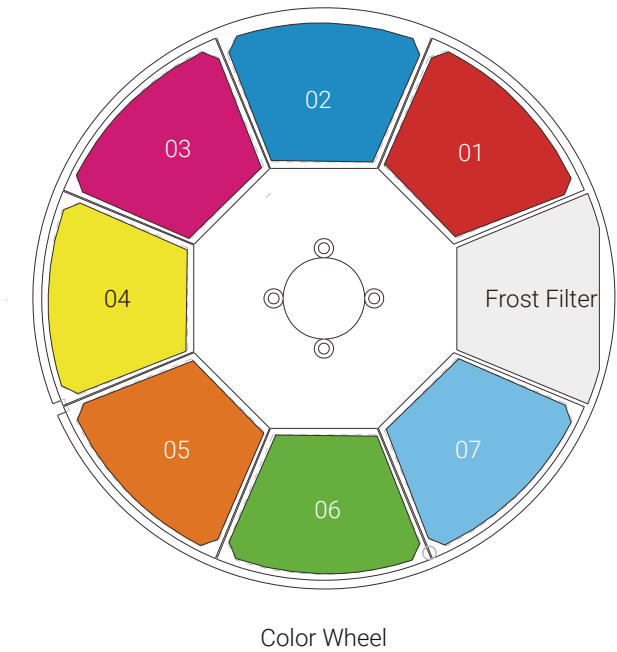


Static Gobos

- 1 Static Gobo Wheel: 9 gobos, plus open

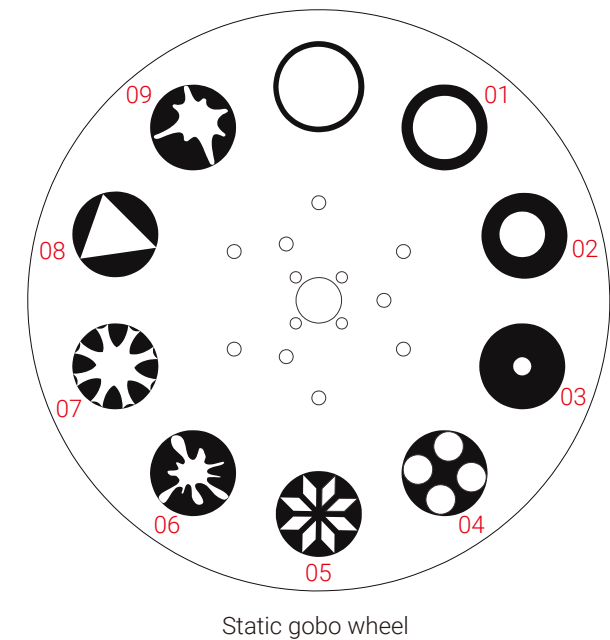

Rotating Gobos

- 1 Rotating Gobo Wheel: 7 gobos, plus open
- Gobo Diameter: 26.8 mm
- Image Diameter: 16.8 mm
- Gobo Thickness: 1.1 mm
- Set with "SLOT & LOCK" system for gobos replacement

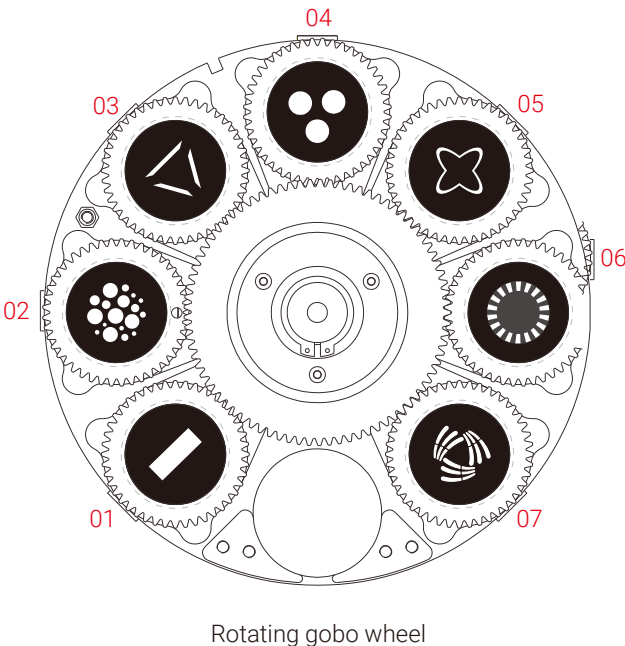

Other Effects

- Outstanding strobe effect with variable speed
- Motorized focus
- Smooth dimming 0-100%



Pan & Tilt

- Pan Movement: 540°
- Tilt Movement: 270°
- Automatic Pan/Tilt position correction
- Moving-head operated with 16 bit resolution

Control

- 4 touch button control panel
- Display: LCD display
- Protocols: DMX512, RDM
- DMX Protocol Modes: 1
- Control Channels: 18
- Firmware Upgrade: Upgrade via DMX link

Electrical & Connectors

- Power supply with electronic auto-ranging
- Input Voltage Range: **180-240Vac; 50/60Hz**
- Power Consumption: 460W
- Power In/Out: Power connector in/out (TRUE1 type)
- Data In/Out: 3-pin XLR

Physical Information

- Fixture Dimensions :
350 x 223 x 531 mm (13.8" x 8.8" x 20.9")
- Weight: 18.0 kg (39.7 lbs)

Work environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 70°C
- Protection Rating: IP20

Installation

- Horizontal or vertical mounting
- Universal working position
- 2 pairs of 1/4-turn locking points under the base
- 2 omega brackets
- Safety cable attachment point

Photometric (Images)

