

*Note: This product isn't sold in Europe and North America.

AECO 15



Light Source
1,500W LED

Diameter of Frontal Lens
180 mm

Total Lumen Output of Fixture
33,500 lumens

Zoom Range
5°-52°

Acme

AECO 15



Main Features

LED engine comprised of 1,500 LED

180 mm diameter frontal lens

Zoom Range: 5°-52°

Total Lumen Output of Fixture: 33,500 lumens

Color Temperature Output of Fixture: 6,200K

1 Static Gobo Wheel, 1 Rotating Gobo Wheel

1 Color Wheel

1 Static Gobo Wheel: 8 gobos, plus open

1 Rotating Gobo Wheel: 7 gobos, plus open

1 Color Wheel: 5 colors + CTB, plus open

1 graphic animation wheel with continuous rotation in both directions

1 x 4-facet circular prism, rotatable in both directions

1 combinable light frost filter and 1 combinable medium frost filter

Shutter Blades: 4 blades, each with separate movement and full blackout

Rotation: $\pm 60^\circ$ of the complete framing system

Outstanding strobe effect with variable speed

Smooth dimming 0-100%

Motorized linear Iris

CRI: $R_a \geq 95$, $R_9 \geq 95$, $R_{15} \geq 95$


TMCI ≥ 95 , TM-30 Rf: 91, TM-30 Rg: 99

Linear CMY color mixing

Reliable cooling technology for the light source

Variable CTO ranging from 2,700K-6,200K

Technical Specifications

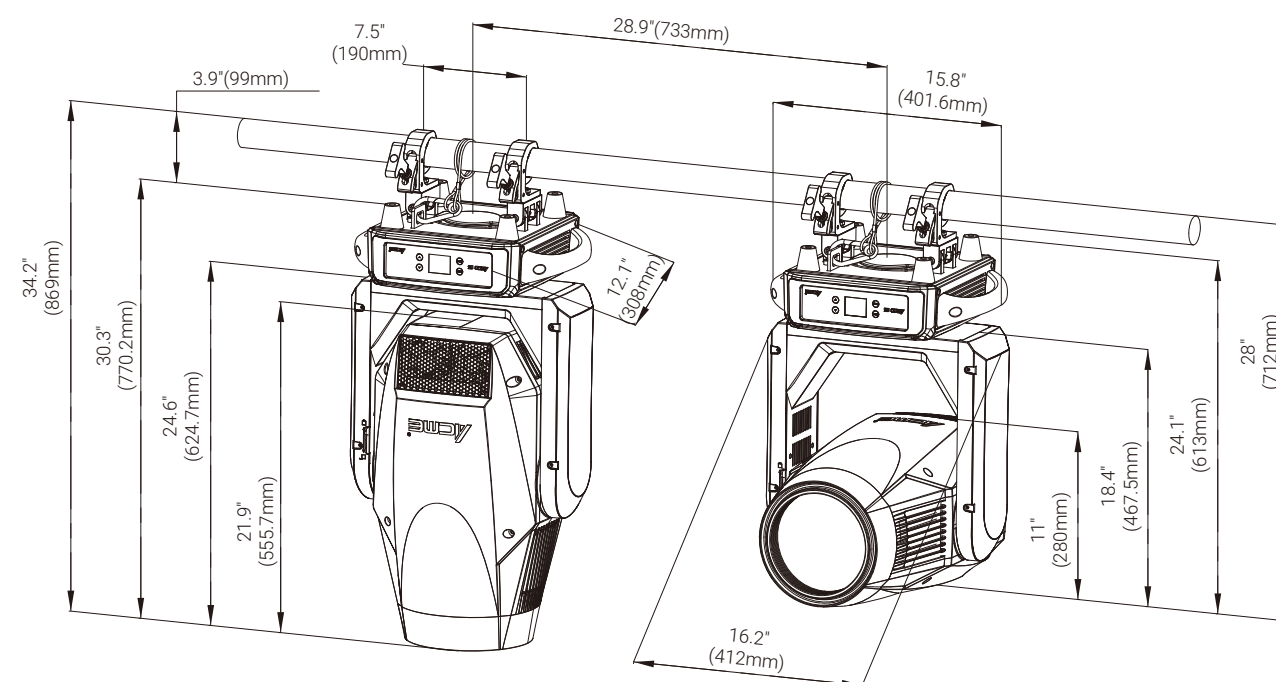

Light Source

- Light Source: 1,500W LED engine
- Color Temperature Output of Fixture: 6,200K
- Total Lumen Output of Fixture: 33,500 lumens
- Life Expectancy: 20,000 hours*

*Source manufacturer specification

Optical System

- Zoom Range: 5°-52°
- Diameter of Frontal Lens: 180 mm
- Color Rendering:
Ra≥95, R9≥95, R15≥95
TLCI≥95, TM-30 Rf: 91, TM-30 Rg: 99

Prism / Frost Filter



Colors


- Linear CMY color mixing



- Linear CTO Color Correction: 2,700K-6,200K




- 1 Color Wheel: 5 colors + CTB, plus open

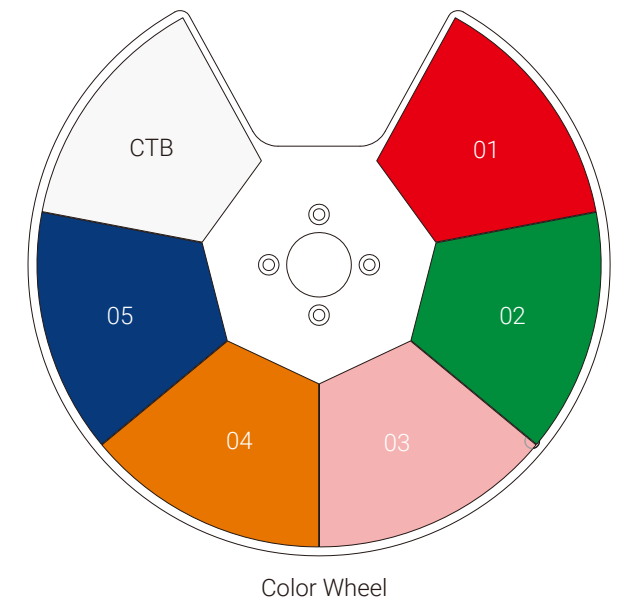


Static Gobos

- 1 Static Gobo Wheel: 8 gobos, plus open

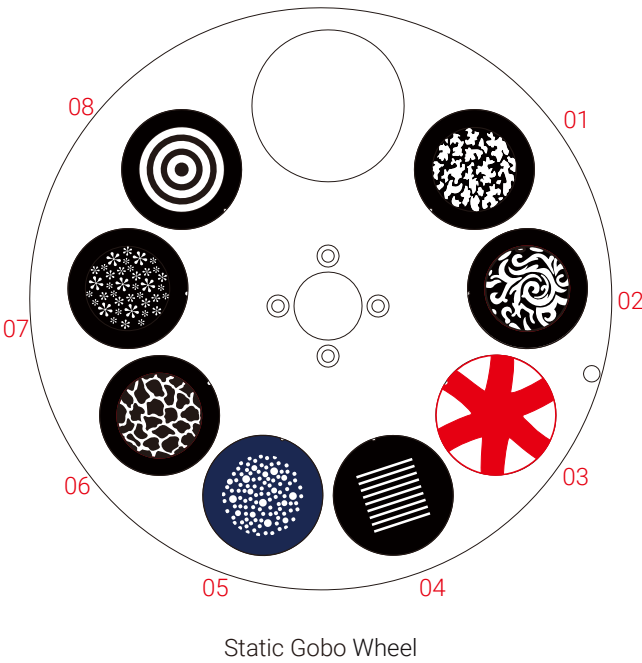

Rotating Gobos

- 1 Rotating Gobo Wheel: 7 gobos, plus open
- Gobo Diameter: 29.8 mm Image Diameter: 22 mm
- GoboThickness: 1.1 mm
- GoboMax Thickness: 3.4 mm

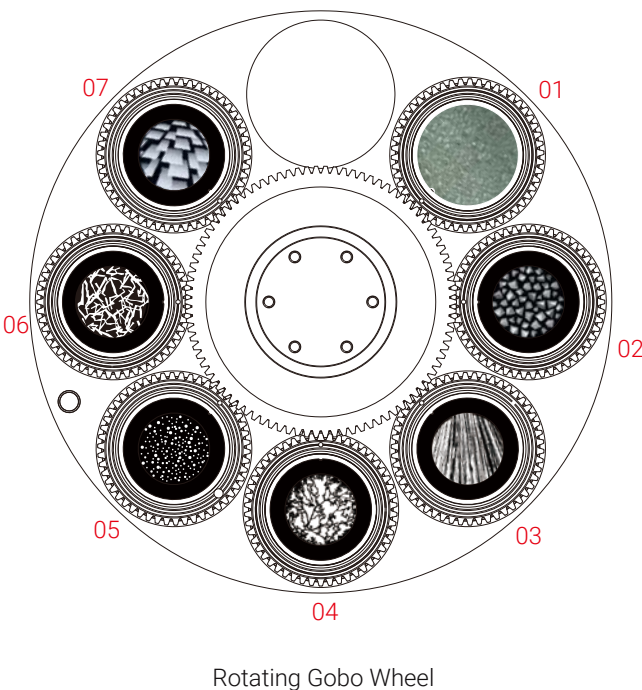

Framing System

- Shutter Blades: 4 blades, each with separate movement and full blackout
- Rotation: ±60° of the complete framing system

Animation Wheel

- A graphic animation wheel with continuous rotation in both directions, used alone or in combination with gobos to create the splendid water wave & flame effect, and can be changed into other wheels

Other Effects

- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%
- Motorized linear Iris



Pan & Tilt

- Pan Movement: 540°
- Tilt Movement: 270°
- Automatic pan/tilt position correction
- Moving-head operated with 16 bit resolution
- Fixation: Pan/Tilt lock

Control

- 4 touch button control panel
- Display: LCD display
- Protocols: DMX512, RDM
- DMX Protocol Modes: 4
- Control Channels: 22/29/31/38
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 1,555W
- Power In/Out: Power Cord in
- Data In/Out: 3-pin and 5-pin XLR

Physical Information

- Fixture Dimensions:
412 x 308 x 770 mm (16.3" x 12.1" x 30.3")
- Weight: 43 kg (94.8 lbs)

Packing Information

- Flight Case Dimensions:
715 x 595 x 905 mm (28.1" x 23.4" x 35.6")
- Weight:
G.W.: 91 kg (200.6 lbs) (one-pack loader case)
- Carton Dimensions:
670 x 520 x 750 mm (26.4" x 20.5" x 29.5")
- Weight:
G.W.: 45 kg (99.2 lbs) (one-pack loader carton)


Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: 0°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP20

Installation

- Horizontal or vertical mounting
- Universal working position
- 2 fixed foldable clamps for 50 mm truss
- Safety cable attachment point

Photometric (Images)

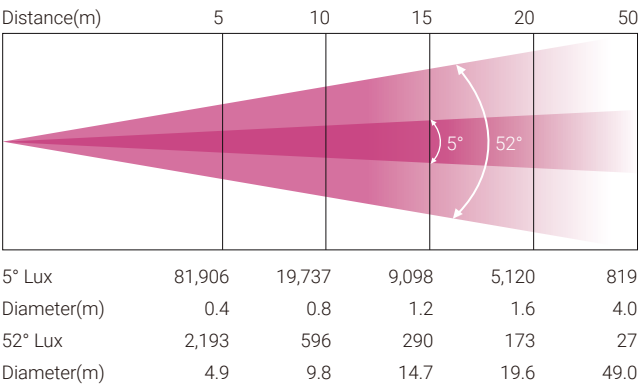

Specifications subject to change without notice.

***Note: This product isn't sold in Europe and North America.**

11/23/2024