


MODEL: ACTORIS PARLED / RGBW

CODE: AL2595 / AL2596

March 14, 2025

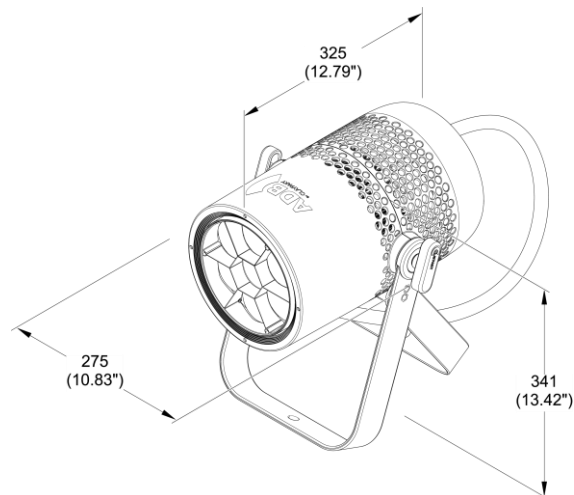

LIGHT SOURCE:

- Source type:**
- ParLED: 7x Osram 40W RGBWW LED
 - ParLED RGBW: 7x Osram 40W RGBW LED

- LED life expectancy:**
- 20.000 Hrs L70*

* It may vary depending on various factors, such as the type of use and environment

PHOTOMETRIC DATA:

- Zoom range:** • 4° - 53°
- Lm output:** • 3380 Lm (integrating sphere)
- Front lens:** • Ø 150 mm
- Optical syt.:** • High efficiency

NOISE LEVEL:

- Fixed presets:**
- RnR mode:* 44.6 dBA
 - Boost mode:* 36.6 dBA
 - Theatre mode:* 31.5 dBA
 - Silent mode:* 28.0 dBA
 - Fanless mode:* 24.6 dBA
- * Dimmer at 100%

CONTROL & CONNECTIONS:

- Personalities:** • 2 modes with 13 / 17 control channels
- Protocols:** • DMX, Art-Net, sACN, RDM
- Connectors:** • Locking 5 pin XLR IN/OUT
• RJ45 IN
- Power con.:** • PowerCon True1 IN/OUT
- Web server:** • Built-in
- CloudIO:** • Fully compatible

DYNAMIC EFFECTS:

- Colors:**
- Color mixing 16 bit
 - Linear CTO from 8000K to 2500K (Actoris ParLED RGBW)
 - Linear CTB from 2500K to 7500K (Actoris ParLED)
 - Preset macro colors

- Beam:** • Motorized zoom
- Dimmer / Shutter:** • High resolution electronic dimmer - 24 bit, 5 curves
• Electronic strobe

HARDWARE & SOFTWARE:

- Display graphic LCD backlit B/W display
- Firmware upload from another fixture
- Firmware upgrade via Web Server
- Diagnostic
- DMX monitoring
- Remote access through RDM

HOUSING:

- Steel structure with plastic components
- Two built-in brackets designed to stand on the floor
- IP20 protection rate
- Working in any position
- Hanging system: built-in brackets
- Optional safety chain

ELECTRICAL:

- Operating voltage:** • 100-240V, 50/60 Hz
- In/Out MAX:** • 8(3) fixtures @ 200-240Vac (@ 100-120Vac)
- Power Supply:** • Electronic auto range with active PFC
- MAX power consumption:** • 326W

THERMAL SPECIFICATION:

- MAX Ambient temperature:** • 45°C (113°F)
- Min Ambient Temperature:** • -20°C (-4°F)
- MAX temp. of the ext. surface:** • 90°C (194°F)
- Total heat dissipation:** • 1100 BTU/hr ±10% / 1170 kJ/hr ±10%

SAFETY SPECIFICATIONS:

- Min. dist. of illum. objs:** • 0.2 m (8")
- Min. dist. from flamm. mat.:** • 0.2 m (8")
- Protections:** • T6.3A fuse
• Thermally protected power supply (overheating and cooling failure)
• Forced ventilation with axial fans

COMPLIANCE:

CE Marking (in conformity to the following):

- 2014/35/EU - Low Voltage directive (LVD)
- 2014/30/EU - Electromagnetic compatibility of equipment (EMC)
- 2011/65/EU - Restriction of the use of certain hazardous substances (RoHS)
- 2009/125/EC - EcoDesign requirements for Energy-related Products (ErP)

UKCA conforms to UK regulations:

- S.I. 2016 N.1101
- S.I. 2016 N. 1091
- S.I. 2012 N.3032
- S.I. 2010 N.2617

cMETus LISTED:

- UL 1573:2003
- CSA C22.2 N.166:2015

PACKAGING:

- Carton box + Polystyrene
- Carton box + Foam shell
- Flight case + Foam shell (8 positions)

WEIGHT & SIZES:

- Weight:** • 5.7 Kg (12.6 lbs)
- Base dim.s:** • 341 x 325 x 275 mm
• 13.42 x 12.79 x 10.83 In
- Dist. b/t 2 fixt:** • 400 mm

ACCESSORIES:

- ETL Power:** • CAB02B/802 (Included)*
* Cord 1.5 m (bare end with IP65 PowerConTrue1 conn.)
- Gel Frame / Barndoors holder:** • AA2017000102 (Optional)
- Gel frame:** • AA2018000102 (Optional)
(only in connection with Gel Frame / Barndoors Holder AA2017000102)
- Barndoors:** • AA2019000102 (Optional)
(only in connection with Gel Frame / Barndoors Holder AA2017000102)
- Frost filter 5Å** • AA2021000102 (Optional)
(only in connection with Gel Frame / Barndoors Holder AA2017000102 and Gel Frame AA2018000102)
- Frost filter 2Å** • AA2020000102 (Optional)
(only in connection with Gel Frame / Barndoors Holder AA2017000102 and Gel Frame AA2018000102)
- Egg crate:** • CA3002000100 (Optional)
- Foam shell:** • F21332/801 (Optional)
- Flight case (8 pos):** • CF1017F (Optional)
- Safety Chain:** • 105041/003 (Optional)
- Clamp:** • C21070 (Optional)